

Eplain: Expanded Plain T_EX

November 2007

3.2

Karl Berry
Oleg Katsitadze
Steven Smith

This manual documents the Eplain macros, version 3.2, November 2007. Eplain provides functionality for plain \TeX that is intended to be useful regardless of how your document is actually formatted.

Most of this manual is in the public domain, like most of the Eplain code. It was originally written by Karl Berry, starting in 1989. Steven Smith wrote the documentation for the commutative diagram macros; this chapter is under the GNU General Public License. Adam Lewenberg has made additions and corrections. Oleg Katsitadze wrote the section on \LaTeX packages and the chapter on hyperlinks, and updates throughout.

Short Contents

1	Introduction	1
2	Installation	2
3	Invoking Eplain	3
4	User definitions	5
5	Hyperlinks	37
6	Arrow theoretic diagrams	59
7	Programming definitions	66
8	Demo files	76
	Macro index	83
	Concept index	88

Table of Contents

1	Introduction	1
2	Installation	2
3	Invoking Eplain	3
4	User definitions	5
4.1	Diagnostics	5
4.2	Rules	5
4.3	Citations	5
4.3.1	Formatting citations	7
4.3.2	Formatting bibliographies	8
4.4	Displays	9
4.4.1	Formatting displays	9
4.5	Time of day	9
4.6	Lists	9
4.6.1	Formatting lists	10
4.7	Verbatim listing	11
4.8	Contents	12
4.8.1	Writing the <code>.toc</code> file	12
4.8.2	Reading the <code>.toc</code> file	13
4.8.3	Changing the <code>.toc</code> file's root name	14
4.8.4	Alternative contents files	14
4.9	Cross-references	14
4.9.1	Defining generic references	14
4.9.2	Using generic references	15
4.10	Page references	15
4.11	Equation references	16
4.11.1	Formatting equation references	16
4.11.2	Subequation references	18
4.12	Indexing	19
4.12.1	Indexing terms	19
4.12.1.1	Indexing commands	20
4.12.1.2	Modifying index entries	21
4.12.1.3	Index entries with special characters	22
4.12.1.4	Proofing index terms	23
4.12.2	Typesetting an index	24
4.12.3	Customizing indexing	25
4.13	Justification	26
4.14	Tables	27
4.15	Margins	28
4.16	Multiple columns	29

4.17	Footnotes	29
4.18	Fractions	30
4.19	Paths	30
4.20	Logos	31
4.21	Boxes	31
4.22	Checking for PDF output	32
4.23	Loading L ^A T _E X packages	32
4.23.1	The <code>\usepackage</code> command	33
4.23.2	Environment for loading packages	33
4.23.3	Packages known to work	34
4.23.4	Packages known not to work	36
5	Hyperlinks	37
5.1	Introduction to hyperlinks	37
5.2	Explicit hyperlinks	38
5.3	Implicit hyperlinks	39
5.3.1	General hyperlinks: <code>hrefint</code> , <code>hrefext</code>	40
5.3.2	URL hyperlinks: <code>url</code>	40
5.3.3	Citation hyperlinks: <code>cite</code> , <code>bib</code>	41
5.3.4	List hyperlinks: <code>li</code>	41
5.3.5	Cross-reference hyperlinks: <code>definexref</code> , <code>ref</code>	41
5.3.6	Page reference hyperlinks: <code>xrdef</code> , <code>xref</code>	42
5.3.7	Equation reference hyperlinks: <code>eq</code>	42
5.3.8	Index hyperlinks: <code>idx</code>	42
5.3.8.1	Exact destinations for index terms	43
5.3.8.2	Page destinations for index terms	44
5.3.8.3	Choosing destination placement	44
5.3.8.4	Index page list and page range parsers	45
5.3.8.5	Hyperlinks in <code>see</code> and <code>see also</code> entries	45
5.3.9	Footnote hyperlinks: <code>foot</code> , <code>footback</code>	45
5.3.10	Contents hyperlinks	45
5.4	Hyperlink drivers	45
5.4.1	Options supported by all drivers	46
5.4.2	Hyperlink driver <code>hypertex</code>	46
5.4.2.1	Destination types for <code>hypertex</code>	47
5.4.2.2	Destination options for <code>hypertex</code>	48
5.4.2.3	Link types for <code>hypertex</code>	48
5.4.2.4	Link options for <code>hypertex</code>	49
5.4.3	Hyperlink drivers <code>pdftex</code> and <code>dvipdfm</code>	49
5.4.3.1	Destination types for <code>pdftex</code> and <code>dvipdfm</code>	49
5.4.3.2	Destination options for <code>pdftex</code> and <code>dvipdfm</code>	50
5.4.3.3	Link types for <code>pdftex</code> and <code>dvipdfm</code>	51
5.4.3.4	Link options for <code>pdftex</code> and <code>dvipdfm</code>	53
5.4.4	Hyperlink driver <code>nolinks</code>	54
5.5	Setting hyperlink types and options	55
5.5.1	Setting default types and options	55
5.5.2	Setting group types	56
5.5.3	Setting group options	56

5.6	Turning hyperlinks on/off	57
5.6.1	Turning low-level commands on/off	57
5.6.2	Turning hyperlinks on/off for a group	58
6	Arrow theoretic diagrams	59
6.1	Slanted lines and vectors	59
6.2	Commutative diagrams	59
6.2.1	Arrows and morphisms	59
6.2.2	Construction of commutative diagrams	61
6.2.3	Commutative diagram parameters	64
7	Programming definitions	66
7.1	Category codes	66
7.2	Allocation macros	67
7.3	Iteration	67
7.4	Macro arguments	68
7.5	Converting to characters	69
7.6	Expansion	70
7.6.1	<code>\csn</code> and <code>\ece</code>	70
7.6.2	<code>\edefappend</code>	70
7.6.3	Hooks	70
7.6.4	Properties	71
7.6.5	<code>\expandonce</code>	71
7.6.6	<code>\ifundefined</code>	72
7.6.7	<code>\ifempty</code>	72
7.6.8	<code>\ifinteger</code> and <code>\isinteger</code>	72
7.6.9	<code>\futurenonSPACELET</code>	72
7.7	Obeying spaces	73
7.8	Writing out numbers	73
7.9	Mode-specific penalties	73
7.10	Auxiliary files	73
7.11	User-defined environments	74
7.12	Page list and page range parsers	74
8	Demo files	76
8.1	Hyperlinks (<code>xhyper.tex</code>)	76
8.2	Highlighting T _E X comments in listings (<code>lscommnt.tex</code>)	81
	Macro index	83
	Concept index	88

1 Introduction

The *Eplain* macro package expands on and extends the definitions in plain \TeX . This manual describes the definitions that you, as either an author or a macro writer, might like to use. It doesn't discuss the implementation; see comments in the source code (`'xeplain.tex'`) for that.

Eplain is not intended to provide “generic” typesetting capabilities, as do \LaTeX (written by Leslie Lamport) or \TeXinfo (written by Richard Stallman and others). Instead, it provides definitions that are intended to be useful regardless of the high-level commands that you use when you actually prepare your manuscript.

For example, Eplain does not have a command `\section`, which would format section headings in an “appropriate” way, such as \LaTeX 's `\section`. The philosophy of Eplain is that some people will always need or want to go beyond the macro designer's idea of “appropriate”. Such canned macros are fine—as long as you are willing to accept the resulting output. If you don't like the results, or if you are trying to match a different format, you are out of luck.

On the other hand, almost everyone would like capabilities such as cross-referencing by labels, so that you don't have to put actual page numbers in the manuscript. The author of Eplain is not aware of any generally available macro packages that (1) do not force their typographic style on an author, and yet (2) provide such capabilities.

Besides such generic macros as cross-referencing, Eplain contains another set of definitions: ones that change the conventions of plain \TeX 's output. For example, math displays in \TeX are, by default, centered. If you want your displays to come out left-justified, you have to plow through *The \TeX book* to find some way to do it, and then adapt the code to your own needs. Eplain tries to take care of the messy details of such things, while still leaving the detailed appearance of the output up to you.

Finally, numerous definitions turned out to be useful as Eplain was developed. They are also documented in this manual, on the chance that people writing other macros will be able to use them.

You can send bug reports or suggestions to tex-eplain@tug.org. The current version number of Eplain is defined as the macro `\fmtversion` at the end of the source file `'eplain.tex'`. When corresponding, please refer to it.

To get on this mailing list yourself, email tex-eplain-request@tug.org with a message whose body contains a line

`subscribe you@your.preferred.address`

or visit <http://tug.org/mailman/listinfo/tex-eplain>.

David Walden had reported his experience with Eplain as a new user. The article is available online at <http://tug.org/pracjourn/2005-4/walden>. An introductory article (written for *TUGboat*) is also available online at <http://tug.org/eplain/misc/tb84katsi.pdf>.

2 Installation

Your T_EX installation should already contain a version of Eplain (`eplain.tex`) in its main `texmf` tree (usually under `/usr/share/texmf/tex/eplain/` on Unix systems). To install a newer version of Eplain, put the new `eplain.tex` (included in Eplain distributions) in the `tex/eplain/` subdirectory of your local `texmf` tree. The newer version you install in the local tree should override the older one in the main tree.

The location of the local `texmf` tree obviously depends on your operating system and T_EX installation. On Unix systems the usual location is `/usr/local/share/texmf/`. If you don't have write permissions for `/usr/local/share/texmf/`, many installations read the `texmf` tree in the user's home directory; `eplain.tex` then should go under `~/texmf/tex/eplain/`. For more information about T_EX directory structure, please see <http://www.tex.ac.uk/cgi-bin/texfaq2html?label=tds>.

If you prefer to install `eplain.tex` in a non-standard place, set an environment variable (TEXINPUTS for the Web2C port of T_EX to Unix) to tell T_EX how to find it.

If you want, you can also create a format (`.fmt`) file for Eplain, which will eliminate the time spent reading the macro source file with `\input`. You do this by issuing a sequence of Unix commands something like this:

```
prompt$ touch eplain.aux
prompt$ initex
This is TeX, ...
**&plain eplain
(eplain.tex)
*\dump
... messages ...
```

You must make sure that `eplain.aux` exists *before* you run `initex`; otherwise, warning messages about undefined labels will never be issued.

You then have to install the resulting `eplain.fmt` in your local `texmf` tree or set an environment variable to tell T_EX how to find it. For the Web2C port of T_EX to Unix, format files are usually installed under `/usr/local/share/texmf/web2c/` or `/var/lib/texmf/web2c/`; the environment variable is TEXFORMATS.

3 Invoking Eplain

The simplest way to use Eplain is simply to put:

```
\input eplain
```

at the beginning of your input file. The macro file is small enough that reading it does not take an unbearably long time—at least on contemporary machines.

In addition, if a format (‘.fmt’) file has been created for Eplain (see the previous section), you can eliminate the time spent reading the macro source file. You do this by responding `&eplain` to T_EX’s ‘**’ prompt. For example:

```
initex
This is TeX, ...
**&eplain myfile
```

Depending on the implementation of T_EX which you are using, you might also be able to invoke T_EX as ‘eplain’ and have the format file automatically read.

If you write something which you will be distributing to others, you won’t know if the Eplain format will be loaded already. If it is, then doing `\input eplain` will waste time; if it isn’t, then you must load it. To solve this, Eplain defines the control sequence `\eplain` to be the letter `t` (a convention borrowed from Lisp; it doesn’t actually matter what the definition is, only that the definition exists). Therefore, you can do the following:

```
\ifx\eplain\undefined \input eplain \fi
```

where `\undefined` must never acquire a definition.

Eplain consists of several source files:

- ‘xexplain.tex’
most of the macros;
- ‘arrow.tex’
commutative diagram macros (see [Chapter 6 \[Arrow theoretic diagrams\]](#), [page 59](#)), written by Steven Smith;
- ‘btxmac.tex’
bibliography-related macros (see [Section 4.3 \[Citations\]](#), [page 5](#));
- ‘ifpdf.sty’
sets the switch `\ifpdf`, which can be used to detect pdfT_EX in PDF mode (see [Section 4.22 \[Checking for PDF output\]](#), [page 32](#)), written by Heiko Oberdiek;
- ‘path.sty’
macro for allowing line breaks at punctuation characters within long pathnames, electronic mail addresses, etc., (see [Section 4.19 \[Paths\]](#), [page 30](#)), written by Philip Taylor;
- ‘texnames.sty’
abbreviations for various T_EX-related names (see [Section 4.20 \[Logos\]](#), [page 31](#)), edited by Nelson Beebe.

The file ‘eplain.tex’ is all of these files merged together, with comments removed.

All of these files except ‘xexplain.tex’ can be input individually, if all you want are the definitions in that file.

Also, since the bibliography macros are fairly extensive, you might not want to load them, to conserve T_EX's memory. Therefore, if the control sequence `\nobibtex` is defined, then the bibliography definitions are skipped. You must set `\nobibtex` before `'eplain.tex'` is read, naturally. For example, you could start your input file like this:

```
\let\nobibtex = t
\input eplain
```

By default, `\nobibtex` is undefined, and so the bibliography definitions *are* made.

Likewise, define `\noarrow` if you don't want to include the commutative diagram macros from `'arrow.tex'`, perhaps because you already have conflicting ones.

If you don't want to read or write an `'aux'` file at all, for any kind of cross-referencing, define `\noauxfile` before reading `'eplain.tex'`. This also turns off all warnings about undefined labels.

Eplain conflicts with AMST_EX (to be precise, with `'amspt.sty'`): the macros `\cite` and `\ref` are defined by both.

If you want to use AMST_EX's `\cite`, the solution is to define `\nobibtex` before reading Eplain, as described above.

If you have `'amspt.sty'` loaded and use `\ref`, Eplain writes a warning on your terminal. If you want to use the AMST_EX `\ref`, do `\let\ref = \amsref` after reading Eplain. To avoid the warning, do `\let\ref = \eplainref` after reading Eplain and before using `\ref`.

Sometimes you may need to run T_EX more than once on your `'tex'` file in order to produce and typeset indexes, resolve undefined cross-references and/or citations. The shell script `texi2dvi` from the Texinfo documentation system (see <http://www.gnu.org/software/texinfo>) can automate this process: it runs BibT_EX, MakeIndex and T_EX as many times as needed to complete the compilation process. You will need to set the L^AT_EX environment variable to `'tex'`. For example, in a Bourne-compatible shell, the following command will do all the work:

```
prompt$ LATEX=tex texi2dvi file.tex
```

(Despite the name, `texi2dvi` can also produce `'pdf'` files; just set `'LATEX=pdftex'`.) See the output from the command `texi2dvi --help` for invoking information and a full list of options.

4 User definitions

This chapter describes definitions that are meant to be used directly in a document. When appropriate, ways to change the default formatting are described in subsections.

4.1 Diagnostics

Plain \TeX provides the `\tracingall` command, to turn on the maximum amount of tracing possible in \TeX . The (usually voluminous) output from `\tracingall` goes both on the terminal and into the transcript file. It is sometimes easier to have the output go only to the transcript file, so you can peruse it at your leisure and not obscure other output to the terminal. So, Eplain provides the command `\loggingall`. (For some reason, this command is available in Metafont, but not in \TeX .)

It is also sometimes useful to see the complete contents of boxes. `\tracingboxes` does this. (It doesn't affect whether or not the contents are shown on the terminal.)

You can turn off all tracing with `\tracingoff`.

You can also turn logging on and off globally, so you don't have to worry about whether or not you're inside a group at the time of command. These variants are named `\gloggingall` and `\gtracingall`.

Finally, if you write your own help messages (see `\newhelp` in *The \TeX book*), you want a convenient way to break lines in them. This is what \TeX 's `\newlinechar` parameter is for; however, plain \TeX doesn't set `\newlinechar`. Therefore, Eplain defines it to be the character `^^J`.

For example, one of Eplain's own error messages is defined as follows:

```
\newhelp\envhelp{Perhaps you forgot to end the previous^^J%
  environment? I'm finishing off the current group,^^J%
  hoping that will fix it.}%
```

4.2 Rules

The default dimensions of rules are defined in chapter 21 of the *The \TeX book*. To sum up what is given there, the “thickness” of rules is 0.4pt by default. Eplain defines three parameters that let you change this dimension: `\hruledefaultheight`, `\hruledefaultdepth`, and `\vruledefaultwidth`. By default, they are defined as *The \TeX book* describes.

But it would be wrong to redefine `\hrule` and `\vrule`. For one thing, some macros in plain \TeX depend on the default dimensions being used; for another, rules are used quite heavily, and the performance impact of making it a macro can be noticeable. Therefore, to take advantage of the default rule parameters, you must use `\ehrule` and `\evrule`.

4.3 Citations

Bibliographies are part of almost every technical document. To handle them easily, you need two things: a program to do the tedious formatting, and a way to cite references by labels, rather than by numbers. The Bib \TeX program, written by Oren Patashnik, takes care of the first item; the citation commands in \LaTeX , written to be used with Bib \TeX , take care of the second. Therefore, Eplain adopts the use of Bib \TeX , and virtually the same interface as \LaTeX .

The general idea is that you put citation commands in the text of your document, and commands saying where the bibliography data is. When you run T_EX, these commands produce output on the file with the same root name as your document (by default) and the extension ‘.aux’. BibT_EX reads this file. You should put the bibliography data in a file or files with the extension ‘.bib’. BibT_EX writes out a file with the same root name as your document and extension ‘.bbl’. Eplain reads this file the next time you run your document through T_EX. (It takes multiple passes to get everything straight, because usually after seeing your bibliography typeset, you want to make changes in the ‘.bib’ file, which means you have to run BibT_EX again, which means you have to run T_EX again. . .) An annotated example of the whole process is given below.

If your document has more than one bibliography—for example, if it is a collection of papers—you can tell Eplain to use a different root name for the ‘.bbl’ file by defining the control sequence `\bblfilebasename`. The default definition is simply `\jobname`.

See the document *BibT_EXing* (whose text is in the file ‘`btxdoc.tex`’, which should be in the Eplain distribution you got) for information on how to write your .bib files. Both the BibT_EX and the Eplain distributions contain several examples, also.

The `\cite` command produces a citation in the text of your document. The exact printed form the citation will take is under your control (see [Section 4.3.1 \[Formatting citations\]](#), [page 7](#)). `\cite` takes one required argument, a comma-separated list of cross-reference labels (see [Section 4.9 \[Cross-references\]](#), [page 14](#), for exactly what characters are allowed in such labels). Warning: spaces in this list are taken as part of the following label name, which is probably not what you expect. The `\cite` command also produces a command in the .aux file that tells BibT_EX to retrieve the given reference(s) from the .bib file. `\cite` also takes one optional argument, which you specify within square brackets, as in L^AT_EX. This text is simply typeset after the citations. (See the example below.)

Eplain can create hypertext links for citations pointing to the relevant bibliography entries (see [Section 5.3.3 \[Citation hyperlinks\]](#), [page 41](#)).

Another command, `\nocite`, puts the given reference(s) into the bibliography, but produces nothing in the text.

The `\bibliography` command is next. It serves two purposes: producing the typeset bibliography, and telling BibT_EX the root names of the .bib files. Therefore, the argument to `\bibliography` is a comma separated list of the .bib files (without the ‘.bib’). Again, spaces in this list are significant.

You tell BibT_EX the particular style in which you want your bibliography typeset with one more command: `\bibliographystyle`. The argument to this is a single filename *style*, which tells BibT_EX to look for a file *style.bst*. See the document *Designing BibT_EX styles* (whose text is in the ‘`btxhak.tex`’) for information on how to write your own styles.

Eplain automatically reads the citations from the .aux file when your job starts.

If you don’t want to see the messages about undefined citations, you can say `\xrefwarningfalse` before making any citations. Eplain automatically does this if the .aux file does not exist. You can restore the default by saying `\xrefwarningtrue`.

Here is a T_EX input file that illustrates the various commands.

```
\input eplain                % Reads the .aux file.
Two citations to Knuthian works:
```

```

\cite[note]{surreal,concrete-math}.
\beginsection{References.}\par    % Title for the bibliography.
\bibliography{knuth}              % Use knuth.bib for the labels.
\bibliographystyle{plain}        % Number the references.
\end                             % End of the document.

```

If we suppose that this file was named ‘citex.tex’ and that the bibliography data is in ‘knuth.bib’ (as the `\bibliography` command says), the following commands do what’s required. (‘\$ ’ represents the shell prompt.)

```

$ tex citex          (produces undefined citation messages)
$ bibtex citex       (read knuth.bib and citex.aux, write citex.bbl)
$ tex citex          (read citex.bbl, still have undefined citations)
$ tex citex          (one more time, to resolve the references)

```

The `texi2dvi` program can help you automate this process (see [Chapter 3 \[Invoking Eplain\], page 3](#)).

The output looks something like (because we used the `plain` bibliography style):

Two citations to Knuthian works: [2,1 note].

References

- [1] Ronald L. Graham, Donald E. Knuth, and Oren Patashnik. *Concrete Mathematics*. Addison-Wesley, Reading, Massachusetts, 1989.
- [2] Donald E. Knuth. *Surreal Numbers*. Addison-Wesley, Reading, Massachusetts, 1974.

See the BibTeX documentation for information on how to write the bibliography databases, and the bibliography styles that are available. (If you want your references printed with names, as in [Knu74], instead of numbered, the bibliography style is `alpha`.)

4.3.1 Formatting citations

You may wish to change Eplain’s formatting of citations; i.e., the result of your `\cite` commands. By default, the citation labels are printed one after another, separated by commas and enclosed in brackets, using the main text font. Some formats require other styles, such as superscripted labels. You can accomodate such formats by redefining the following macros.

```

\printcitestart
\printcitefinish

```

Eplain expands these macros at the begining and end of the list of citations for each `\cite` command. By default, they produce a ‘[’ and ‘]’, respectively.

```

\printbetween citations

```

If a `\cite` command has multiple citations, as in `\cite{acp, texbook}`, Eplain expands this macro in between each pair of citations. By default, it produces a comma followed by a space.

```

\printcitenote

```

This macro takes one argument, which is the optional note to the `\cite` command. If the `\cite` command had no note, this macro isn’t used. Otherwise, it should print the note. By default, the note is preceded with a comma and a space.

Here is an example, showing you could produce citations as superscripted labels, with the optional notes in parentheses.

```
\def\printcitestart{\unskip $\^{\bgroup}
\def\printbetweencitations{,}
\def\printcitefinish{\egroup$}
\def\printcitenote#1{\hbox{\sevenrm\space (#1)}}
```

4.3.2 Formatting bibliographies

You may wish to change Eplain’s formatting of the bibliography, especially with respect to the fonts that are used. Therefore, Eplain provides the following control sequences:

\biblabelwidth

This control sequence represents a `\dimen` register, and its value is the width of the widest label in the bibliography. Although it is unlikely you will ever want to redefine it, you might want to use it if you redefine `\biblabelprint`, below.

\biblabelprint

This macro takes one argument, the label to print. By default, the label is put in a box of width `\biblabelwidth`, and is followed by an `enspace`. When you want to change the spacing around the labels, this is the right macro to redefine.

\biblabelcontents

This macro also takes one argument, the label to print. By default, the label is printed using the font `\bblrm` (below), and enclosed in brackets. When you want to change the appearance of the label, but not the spacing around it, this is the right macro to redefine.

\bblrm The default font used for printing the bibliography.

\bblem The font used for printing the titles and other “emphasized” material.

\bblsc In some styles, authors’ names are printed in a caps-and-small-caps font. In those cases, this font is used.

\bblnewblock

This is invoked between each of the parts of a bibliography entry. The default is to leave some extra space between the parts; you could redefine it to start each part on a new line (for example). A part is simply a main element of the entry; for example, the author is a part. (It was L^AT_EX that introduced the (misleading, as far as I am concerned) term ‘block’ for this.)

\biblabelextraspace

Bibliography entries are typeset with a hanging indentation of `\biblabelwidth` plus this. The default is `.5em`, where the `em` width is taken from the `\bblrm` font. If you want to change this, you should do it inside `\bblhook`.

\bblhook This is expanded before reading the `.bbl` file. By default, it does nothing. You could, for example, define it to set the bibliography fonts, or produce the heading for the references. Two spacing parameters must be changed inside `\bblhook`: `\parskip`, which produces extra space between the items; and

`\biblabelextraspace`, which is described above. (By the way, `\hookappend` won't work with `\bblhook`, despite the names. Just use `\def`.)

If you are really desperate, you can also hand-edit the `.bbl` file that BibTeX produces to do anything you wish.

4.4 Displays

By default, TeX centers displayed material. (Displayed material is just whatever you put between `$$`'s—it's not necessarily mathematics.) Many layouts would be better served if the displayed material was left-justified. Therefore, Eplain provides the command `\leftdisplays`, which indents displayed material by `\parindent` plus `\leftskip`, plus `\leftdisplayindent`.

You can go back to centering displays with `\centereddisplays`. (It is usually poor typography to have both centered and left-justified displays in a single publication, though.)

`\leftdisplays` also changes the plain TeX commands that deal with alignments inside math displays, `\displaylines`, `\eqalignno`, and `\leqalignno`, to produce left-justified text. You can still override this formatting by inserting `\hfill` glue, as explained in *The TeXbook*.

4.4.1 Formatting displays

If you want some other kind of formatting, you can write a definition of your own, analogous to `\leftdisplays`. You need only make sure that `\leftdisplaysetup` is called at the beginning of every display (presumably by invoking it in TeX's `\everydisplay` parameter), and to define `\generaldisplay`.

`\leftdisplays` expands the old value of `\everydisplay` before calling `\leftdisplaysetup`, so that any changes you have made to it won't be lost. That old token list is available as the value of the token register `\previouseverydisplay`.

4.5 Time of day

TeX provides the day, month, and year as numeric quantities (unless your TeX implementation is woefully deficient). Eplain provides some control sequences to make them a little more friendly to humans.

`\monthname` produces the name of the current month, abbreviated to three letters.

`\fullmonthname` produces the name of the current month, unabbreviated (in English).

`\timestring` produces the current time, as in '1:14 p.m.'

`\timestamp` produces the current date and time, as in '23 Apr 64 1:14 p.m.'. (Except the spacing is slightly different.)

`\today` produces the current date, as in '23 April 1964'.

4.6 Lists

Many documents require lists of items, either numbered or simply enumerated. Plain TeX defines one macro to help with creating lists, `\item`, but that is insufficient in many cases. Therefore, Eplain provides two pairs of commands:

```
\numberedlist ... \endnumberedlist
\orderedlist ... \endorderedlist
```

These commands (they are synonyms) produce a list with the items numbered sequentially, starting from one. A nested `\numberedlist` labels the items with lowercase letters, starting with ‘a’. Another nested `\numberedlist` labels the items with roman numerals. Yet more deeply nested numbered lists label items with ‘*’.

```
\unorderedlist ... \endunorderedlist
```

This produces a list with the items labelled with small black boxes (“square bullets”). A nested `\unorderedlist` labels items with em-dashes. Doubly (and deeper) nested unordered lists label items with ‘*’s.

The two kinds of lists can be nested within each other, as well.

In both kinds of lists, you begin an item with `\li`. An item may continue for several paragraphs. Each item starts a paragraph.

You can give `\li` an optional argument, a cross-reference label. It’s defined to be the “marker” for the current item. This is useful if the list items are numbered. You can produce the value of the label with `\xrefn`. See [Section 4.9 \[Cross-references\]](#), page 14.

Eplain can create hypertext links for the markers produced by `\xrefn` pointing to the relevant list item (see [Section 5.3.4 \[List hyperlinks\]](#), page 41).

You can also say `\listcompact` right after `\numberedlist` or `\unorderedlist`. The items in the list will then not have any extra space between them (see [Section 4.6.1 \[Formatting lists\]](#), page 10). You might want to do this if the items in this particular list are short.

Here is an example:

```
\numberedlist\listcompact
\li The first item.
\li The second item.
```

```
The second paragraph of the second item.
\endnumberedlist
```

4.6.1 Formatting lists

Several registers define the spacing associated with lists. It is likely that their default values won’t suit your particular layout.

```
\abovelistskipamount, \belowlistskipamount
```

The vertical glue inserted before and after every list, respectively.

```
\interitemskipamount
```

The vertical glue inserted before each item except the first. `\listcompact` resets this to zero, as mentioned above.

```
\listleftindent, \listrightindent
```

`\listrightindent` is the amount of space by which the list is indented on the right; i.e., it is added to `\rightskip`. `\listleftindent` is the amount of space, *relative to* `\parindent`, by which the list is indented on the left. Why

treat the two parameters differently? Because (a) it is more useful to make the list indentation depend on the paragraph indentation; (b) footnotes aren't formatted right if `\parindent` is reset to zero.

The three vertical glues are inserted by macros, and preceded by penalties: `\abovelistskip` does `\vpenalty\abovelistpenalty` and then `\vskip\abovelistskip`. `\belowlistskip` and `\interitemskip` are analogous.

In addition, the macro `\listmarkerspace` is called to separate the item label from the item text. This is set to `\enspace` by default.

If you want to change the labels on the items, you can redefine these macros: `\numberedmarker` or `\unorderedmarker`. The following registers might be useful if you do:

`\numberedlistdepth`, `\unorderedlistdepth`

These keep track of the depth of nesting of the two kinds of lists.

`\itemnumber`, `\itemletter`

These keep track of the number of items that have been seen in the current numbered list. They are both integer registers. The difference is that `\itemnumber` starts at one, and `\itemletter` starts at 97, i.e., lowercase 'a'.

You can also redefine the control sequences that are used internally, if you want to do something radically different: `\beginlist` is invoked to begin both kinds of lists; `\printitem` is invoked to print the label (and space following the label) for each item; and `\endlist` is invoked to end both kinds of lists.

4.7 Verbatim listing

It is sometimes useful to include a file verbatim in your document; for example, part of a computer program. The `\listing` command is given one argument, a filename, and produces the contents of that file in your document. `\listing` expands `\listingfont` to set the current font. The default value of `\listingfont` is `\tt`.

You can take arbitrary actions before reading the file by defining the macro `\setuplistinghook`. This is expanded just before the file is input.

If you want to have line numbers on the output, you can say `\let\setuplistinghook = \linenumberedlisting`. The line numbers are stored in the count register `\lineno` while the file is being read. You can redefine the macro `\printlistinglineno` to change how they are printed.

Normally, the `\listing` command will add a final empty line at the end of the output, even if the file does not end in a newline. To suppress this final line, you can say `\let\setuplistinghook = \nolastlinelisting`. This also works with line numbers (say `\def\setuplistinghook{\linenumberedlisting\nolastlinelisting}`), but only if `\printlistinglineno` consists exclusively of boxes at the top level (i.e., any `\kerns` or glue should be wrapped up in a box).

You can use the form feed control character (ASCII code 12, typed as `CTRL-L`) in the file to force a page break in the output.

You can produce in-line verbatim text in your document with `\verbatim`. End the text with `\endverbatim`. If you need a '!' in the text, double it. If the first character of the

verbatim text is a space, use |. (| will work elsewhere in the argument, too, but isn't necessary.)

For example:

```
\verbatim| |\#%&|endverbatim
```

produces | \#%&|.

Line breaks and spaces in the verbatim text are preserved.

You can change the verbatim escape character from the default ‘|’ with `\verbatimescapechar char`; for example, this changes it to ‘@’.

```
\verbatimescapechar \@
```

The backslash is not necessary in some cases, but is in others, depending on the catcode of the character. The argument to `\verbatimescapechar` is used as `\catcode ‘char’`, so the exact rules follow that for `\catcode`.

Because `\verbatim` must change the category code of special characters, calling inside a macro definition of your own does not work properly. For example:

```
\def\mymacro{\verbatim &#%|endverbatim}% Doesn't work!
```

To accomplish this, you must change the category codes yourself before making the macro definition. Perhaps `\uncatcodespecials` will help you (see [Section 7.1 \[Category codes\]](#), [page 66](#)).

4.8 Contents

Producing a table of contents that is both useful and aesthetic is one of the most difficult design problems in any work. Naturally, Eplain does not pretend to solve the design problem. Collecting the raw data for a table of contents, however, is much the same across documents. Eplain uses an auxiliary file with extension ‘.toc’ (and the same root name as your document) to save the information.

4.8.1 Writing the .toc file

To write an entry for the table of contents, you say `\writetocentry{part}{text}`, where *part* is the type of part this entry is, e.g., ‘chapter’, and *text* is the text of the title. `\writetocentry` puts an entry into the .toc file that looks like `\tocpartentry{text}{page number}` (unless *part* is an integer, see below). The *text* is written unexpanded.

A related command, `\writenumberedtocentry`, takes one additional argument, the first token of which is expanded at the point of the `\writenumberedtocentry`, but the rest of the argument is not expanded. The usual application is when the parts of the document are numbered. On the other hand, the one-level expansion allows you to use the argument for other things as well (author’s names in a proceedings, say), and not have accents or other control sequences expanded. The downside is that if you *want* full expansion of the third argument, you don’t get it—you must expand it yourself, before you call `\writenumberedtocentry`.

For example:

```
\writenumberedtocentry{chapter}{A $\sin$ wave}{\the\chapno}
\writetocentry{section}{A section title}
```

Supposing `\the\chapno` expanded to ‘3’ and that the `\write`’s occurred on pages eight and nine, respectively, the above writes the following to the `.toc` file:

```
\tocchapterentry{A $\sin$ wave}{3}{8}
\tocsectionentry{A section title}{9}
```

A variation on `\writenumberedtocentry` is `\writenumberedtocline`, differing only in the order of the parameters it takes and writes for the `\tocpartentry` control sequences. To continue the previous example:

```
\writenumberedtocline{chapter}{\the\chapno}{A $\sin$ wave}
```

writes the following to the `.toc` file:

```
\tocchapterentry{3}{A $\sin$ wave}{8}
```

Such ordering of the parameters allows the `\tocpartentry` macros to typeset the text of the entry without actually reading it as an argument. This is required for entries which need to change character catcodes, e.g., to produce verbatim text (see [Section 4.7 \[Verbatim listing\]](#), page 11).

Each of `\writetocentry`, `\writenumberedtocentry` and `\writenumberedtocline` processes a numeric *part* argument specially. If you pass *part* expanding to an integer, these macros write into the `.toc` file an entry that starts with `\tocentry{part}`. Thus, you can define a single `\tocentry` macro which formats all entries for a table of contents. To continue the previous examples:

```
\writenumberedtocentry{1}{A $\sin$ wave}{\the\chapno}
\writenumberedtocline{1}{\the\chapno}{A $\sin$ wave}
\writetocentry{2}{A section title}
```

writes the following to the `.toc` file:

```
\tocentry{1}{A $\sin$ wave}{3}{8}
\tocentry{1}{3}{A $\sin$ wave}{8}
\tocentry{2}{A section title}{9}
```

4.8.2 Reading the `.toc` file

You read the `.toc` file with the command `\readtocfile`. Naturally, whatever `\toc...` entry commands that were written to the file must be defined when `\readtocfile` is invoked. Eplain has minimal definitions for `\tocchapterentry`, `\tocsectionentry`, and `\tocsubsectionentry`, just to prevent undefined control sequence errors in common cases. They aren’t suitable for anything but preliminary proofs.

Each of `\writetocentry`, `\writenumberedtocentry` and `\writenumberedtocline` opens the `.toc` file for writing, thereby deleting the information from the previous run. You should therefore arrange that `\readtocfile` be called *before* the first call to a `\writetoc...` macro. `\readtocfile` does not itself delete the information from the `.toc` file, so that you can call it several times, e.g., to create both a short and normal table of contents. (To produce this in particular, define `\tocsectionentry` to produce nothing while you are reading `.toc` file for a short table of contents (see [Section 7.4 \[Macro arguments\]](#), page 68).)

On the other hand, if you don’t want to rewrite the `.toc` file at all, perhaps because you are only running T_EX on part of your manuscript, you can set `\rewritetocfilefalse`.

4.8.3 Changing the .toc file’s root name

By default, the ‘.toc’ file has the root `\jobname`. If your document has more than one contents—for example, if it is a collection of papers, some of which have their own contents—you can tell Eplain to use a different root name by defining the control sequence `\tocfilebasename`.

Note that `\writetocentry`, `\writenumberedtocentry` and `\writenumberedtocline` will open the contents file for writing only at the first call, using the value of `\tocfilebasename` at that time. Changing the value of `\tocfilebasename` afterwards will not affect which file gets *written*, although it will affect which file gets *read* by `\readcontentsfile`. In case you need to write several contents files from a single T_EX job, use `\definecontentsfile` (see [Section 4.8.4 \[Alternative contents files\]](#), [page 14](#)).

4.8.4 Alternative contents files

In addition to the usual table of contents, you may want to have a list of figures, list of tables, or other such contents-like list. You can do this with `\definecontentsfile{abbrev}`. All of the above commands are actually a special case that Eplain predefines with

```
\definecontentsfile{toc}
```

The *abbrev* is used both for the file extension and in the control sequence names.

4.9 Cross-references

It is often useful to refer the reader to other parts of your document; but putting literal page, section, equation, or whatever numbers in the text is certainly a bad thing.

Eplain therefore provides commands for symbolic cross-references. It uses an auxiliary file with extension `.aux` (and the same root name as your document) to keep track of the information. Therefore, it takes two passes to get the cross-references right—one to write them out, and one to read them in. Eplain automatically reads the `.aux` file at the first reference; after reading it, Eplain reopens it for writing.

You can control whether or not Eplain warns you about undefined labels. See [Section 4.3 \[Citations\]](#), [page 5](#).

Labels in Eplain’s cross-reference commands can use characters of category code eleven (letter), twelve (other), ten (space), three (math shift), four (alignment tab), seven (superscript), or eight (subscript). For example, ‘`a1 $&^_`’ is a valid label (assuming the category codes of plain T_EX), but ‘`%#\{`’ has no valid characters.

You can also do symbolic cross-references for bibliographic citations and list items. See [Section 4.3 \[Citations\]](#), [page 5](#), and [Section 4.6 \[Lists\]](#), [page 9](#).

Eplain can create hypertext links for the cross-references (see [Section 5.3.5 \[Cross-reference hyperlinks\]](#), [page 41](#)).

4.9.1 Defining generic references

Eplain provides the command `\definexref` for general cross-references. It takes three arguments: the name of the label (see section above for valid label names), the value of the label (which can be anything), and the “class” of the reference—whether it’s a section, or theorem, or what. For example:

```
\definexref{sec-intro}{3.1}{section}
```

Of course, the label value is usually generated by another macro using T_EX count registers or some such.

`\definexref` doesn't actually define *label*; instead, it writes out the definition to the `.aux` file, where Eplain will read it on the next T_EX run.

The *class* argument is used by the `\ref` and `\refs` commands. See the next section.

4.9.2 Using generic references

To retrieve the value of the label defined via `\definexref` (see the previous section), Eplain provides the following macros:

```
\refn{label}
```

```
\xrefn{label}
```

`\refn` and `\xrefn` (they are synonyms) produce the bare definition of *label*. If *label* isn't defined, issue a warning, and produce *label* itself instead, in type-writer. (The warning isn't given if `\xrefwarningfalse`.)

```
\ref{label}
```

Given the class *c* for *label* (see the description of `\definexref` in the previous section), expand the control sequence `\c word` (if it's defined) followed by a tie. Then call `\refn` on *label*. (Example below.)

```
\refs{label}
```

Like `\ref`, but append the letter 's' to the `\...word`.

The purpose of the `\...word` macro is to produce the word 'Section' or 'Figure' or whatever that usually precedes the actual reference number.

Here is an example:

```
\def\sectionword{Section}
```

```
\definexref{sec-intro}{3.1}{section}
```

```
\definexref{sec-next}{3.2}{section}
```

```
See \refs{sec-intro} and \refn{sec-next} ...
```

This produces 'See Sections 3.1 and 3.2 ...'

4.10 Page references

Eplain provides two commands for handling references to page numbers, one for definition and one for use.

```
\xrdef{label}
```

Define *label* to be the current page number. This produces no printed output, and ignores following spaces.

```
\xref{label}
```

Produce the text 'p. *pageno*', which is the usual form for cross-references. The *pageno* is actually *label*'s definition; if *label* isn't defined, the text of the label itself is printed. The 'p. ' prefix is defined by `\xrefpageword`. Its default definition is `p.\thinspace`.

Eplain can create hypertext links for the page references (see [Section 5.3.6 \[Page reference hyperlinks\]](#), page 42).

4.11 Equation references

Instead of referring to pages, it's most useful if equation labels refer to equation numbers. Therefore, Eplain reserves a `\count` register, `\eqnumber`, for the current equation number, and increments it at each numbered equation.

Here are the commands to define equation labels and then refer to them:

`\eqdef{label}`

This defines *label* to be the current value of `\eqnumber`, and, if the current context is not inner, then produces a `\eqno` command. (The condition makes it possible to use `\eqdef` in an `\eqalignno` construction, for example.) The text of the equation number is produced using `\eqprint`. See [Section 4.11.1 \[Formatting equation references\]](#), page 16.

If *label* is empty, you still get an equation number (although naturally you can't reliably refer to it). This is useful if you want to put numbers on all equations in your document, and you don't want to think up unique labels.

To refer to the last equation with the empty label, you just use the empty label in one of the equation reference macros (see below). This can be handy when you want to refer to an equation shortly after its definition, say, in the sentence following the displayed equation, and do not intend to refer to the equation later. But use this trick with extreme caution: if later you change the text and insert another empty definition between the original definition and the reference, the reference will start to refer to the new empty-labeled equation.

`\eqdefn{label}`

This is like `\eqdef`, except it always omits the `\eqno` command. It can therefore be used in places where `\eqdef` can't; for example, in a non-displayed equation. The text of the equation number is not produced, so you can also use it in the (admittedly unusual) circumstance when you want to define an equation label but not print that label.

`\eqref{label}`

This produces a formatted reference to *label*. If *label* is undefined (perhaps because it is a forward reference), it just produces the text of the label itself. Otherwise, it calls `\eqprint`.

`\eqrefn{label}`

This produces the cross-reference text for *label*. That is, it is like `\eqref`, except it doesn't call `\eqprint`.

Equation labels can contain the same characters that are valid in general cross-references.

Eplain can create hypertext links for the equation references (see [Section 5.3.7 \[Equation reference hyperlinks\]](#), page 42).

4.11.1 Formatting equation references

Both defining an equation label and referring to it should usually produce output. This output is produced with the `\eqprint` macro, which takes one argument, the equation number being defined or referred to. By default, this just produces '*(number)*', where *number* is the equation number. To produce the equation number in a different font, or

with different surrounding symbols, or whatever, you can redefine `\eqprint`. For example, the following definition would print all equation numbers in italics. (The extra braces define a group, to keep the font change from affecting surrounding text.)

```
\def\eqprint#1{\it (#1)}
```

In addition to changing the formatting of equation numbers, you might want to add more structure to the equation number; for example, you might want to include the chapter number, to get equation numbers like ‘(1.2)’. To achieve this, you redefine `\eqconstruct`. For example:

```
\def\eqconstruct#1{\the\chapternumber.#1}
```

(If you are keeping the chapter number in a count register named `\chapternumber`, naturally.)

The reason for having both `\eqconstruct` and `\eqprint` may not be immediately apparent. The difference is that `\eqconstruct` affects the text that cross-reference label is defined to be, while `\eqprint` affects only what is typeset on the page. The example just below might help.

Usually, you want equation labels to refer to equation numbers. But sometimes you might want a more complicated text. For example, you might have an equation ‘(1)’, and then have a variation several pages later which you want to refer to as ‘(1*)’.

Therefore, `\eqplain` allows you to give an optional argument (i.e., arbitrary text in square brackets) before the cross-reference label to `\eqdef`. Then, when you refer to the equation, that text is produced. Here’s how to get the example just mentioned:

```
$$...\eqdef{a-eq}$$
```

```
...
```

```
$$...\eqdef[\eqrefn{a-eq}*]{a-eq-var}$$
```

```
In \eqref{a-eq-var}, we expand on \eqref{a-eq}, ...
```

We use `\eqrefn` in the cross-reference text, not `\eqref`, so that `\eqprint` is called only once.

As another example, consider the following requirement: we want to include chapter number in all equation references, and additionally we want to include the part number when referencing an equation from any part other than the one where the equation appears. For example, references to the third equation in chapter 2 of part 1 should be typeset as ‘(2.3)’ throughout part 1, but as ‘(I.2.3)’ in any other part. Let’s assume we have the current chapter and part numbers in count registers `\chapnum` and `\partnum`, respectively.

The idea is to have `\eqconstruct` store the part number of the equation (that is, the part number *at the time of definition*), so that later `\eqprint` can compare the stored number with the current part number (that is, the part number *at the time of reference*). The complicating factor is that internally, the result of `\eqconstruct` is both expanded and written out to the ‘.aux’ file, *and* used to typeset the equation number, so the commands that store the part number should behave correctly in both situations. This is difficult to achieve with expandable commands; therefore, to avoid expansion problems, we are going to use only TeX primitives, which are non-expandable:

```
\newcount\eqpartnum
```

```
\def\eqconstruct#1{%
```

```

\global\eqpartnum=\the\partnum\relax
\number\chapnum.#1%
}

\def\eqprint#1{%
  \setbox0=\hbox{#1}%
  (\ifnum\partnum=\eqpartnum \else
    \uppercase\expandafter{\romannumeral\eqpartnum}.)%
  \fi
  \box0)%
}%

```

In `\eqconstruct`, besides constructing the base equation number (e.g., ‘1.2’), we also store the part number of the equation in the count register `\eqpartnum` (`\the\partnum` is expanded when the equation number is written to the ‘.aux’ file, so the equation label definition in the ‘.aux’ file will contain the actual part number). In `\eqprint`, we need to know the equation’s part number before we typeset the base equation number, therefore we first put the argument in a box, thus causing `\eqpartnum` to be set.

4.11.2 Subequation references

Eplain also provides for one level of substructure for equations. That is, you might want to define a related group of equations with numbers like ‘2.1’ and ‘2.2’, and then be able to refer to the group as a whole: “... in the system of equations (2)...”.

The commands to do this are `\eqsubdef` and `\eqsubdefn`. They take one *label* argument like their counterparts above, and generally behave in the same way. The difference is in how they construct the equation number: instead of using just `\eqnumber`, they also use another counter, `\subeqnumber`. This counter is advanced by one at every `\eqsubdef` or `\eqsubdefn`, and reset to zero at every `\eqdef` or `\eqdefn`.

You use `\eqref` to refer to subequations as well as main equations.

To put the two together to construct the text that the label will produce, they use a macro `\eqsubreftext`. This macro takes two arguments, the “main” equation number (which, because the equation label can be defined as arbitrary text, as described in the previous section, might be anything at all) and the “sub” equation number (which is always just a number). Eplain’s default definition just puts a period between them:

```
\def\eqsubreftext#1#2{#1.#2}%
```

You can redefine `\eqsubreftext` to print however you like. For example, this definition makes the labels print as ‘2a’, ‘2b’, and so on.

```

\newcount\subref
\def\eqsubreftext#1#2{%
  \subref = #2          % The space stops a <number>.
  \advance\subref by 96 % ‘a’ is character code 97.
  #1\char\subref
}

```

Sadly, we must define a new count register, `\subref`, instead of using the scratch count register `\count255`, because ‘#1’ might include other macro calls which use `\count255`.

4.12 Indexing

Eplain provides support for generating raw material for an index, and for typesetting a sorted index. A separate program must do the actual collection and sorting of terms, because T_EX itself has no support for sorting.

Eplain can create hypertext links pointing from the index to the index terms (see [Section 5.3.8 \[Index hyperlinks\], page 42](#)).

Eplain’s indexing commands were designed to work with the program MakeIndex, available from CTAN hosts in ‘[tex-archive/indexing/makeindex](#)’; MakeIndex is also commonly included in prepackaged T_EX distributions. It is beyond the scope of this manual to explain how to run MakeIndex, and all of its many options. See <http://www.ctan.org/tex-archive/indexing/makeindex>.

The basic strategy for indexing works like this:

1. For a document ‘foo.tex’, Eplain’s indexing commands (e.g., `\idx`; see the section ‘Indexing terms’ below) write the raw index material to ‘foo.idx’.
2. MakeIndex reads ‘foo.idx’, collects and sorts the index, and writes the result to ‘foo.ind’.
3. Eplain reads and typesets ‘foo.ind’ on a subsequent run of T_EX. See the section ‘Typesetting an index’ below.

The `texi2dvi` program can help you automate this process (see [Chapter 3 \[Invoking Eplain\], page 3](#)).

If your document needs more than one index, each must have its own file. Therefore, Eplain provides the command `\defineindex`, which takes an argument that is a single letter, which replaces ‘i’ in the filenames and in the indexing command names described below. For example,

```
\defineindex{m}
```

defines the command `\mdx` to write to the file ‘foo.mdx’. Eplain simply does `\defineindex{i}` to define the default commands.

For each index defined with `\defineindex{n}`, Eplain provides a switch `\ifndx` which controls whether indexing commands write index entries to the corresponding index file. However, even when index term writing is disabled, indexing commands still do all other processing of their arguments, including typesetting of proof index terms (see [Section 4.12.1.4 \[Proofing index terms\], page 23](#)).

For example, if you write `\idxfalse` near the beginning of a document ‘foo.tex’ (before the first indexing command), Eplain will not open the default index file (‘foo.idx’) and the corresponding indexing commands (`\idx`, `\sidx`, etc.) will not write index entries there. This may be useful for draft compilations of a manuscript, e.g., to avoid the overhead of index file input/output.

4.12.1 Indexing terms

Indexing commands in Eplain come in pairs: one command that only writes the index entry to the ‘.idx’ file (see above section), and one that also typesets the term being indexed. The former always starts with ‘s’ (for “silent”). In either case, the name always includes ‘Idx’, where *I* is the index letter, also described above. Eplain defines the index ‘i’ itself, so that’s what we’ll use in the names below.

The silent form of the commands take a subterm as a trailing optional argument. For example, `\sidx{truth}[definition of]` on page 75 makes an index entry that will eventually be typeset (by default) as

```
truth
  definition of, 75
```

Also, the silent commands ignore trailing spaces. The non-silent ones do not.

4.12.1.1 Indexing commands

Here are the commands.

- `\sidx{term}[subterm]` makes an index entry for *term*, optionally with subterm *subterm*. `\idx{term}` also produces *term* as output. Example:

```
\sidx{truth}[beauty of]
The beauty of truth is \idx{death}.
```

Subterms at the second and further levels can also be specified in *subterm*, using the `\idxsubentryseparator` character to separate them. This character is by default ‘!’.

- `\sidxname{First M.}{von Last}[subterm]` makes an index entry for ‘*von Last, First M.*’. You can change the ‘,’ by redefining `\idxnameseparator`. `\idxname{First M.}{von Last}` also produces *First M. von Last* as output. (These commands are useful special cases of `\idx` and `\sidx`.) Example:

```
\sidxname{Richard}{Stark}
\sidxname{Donald}{Westlake} has written many kinds of novels, under
almost as many names.
```

- `\sidxmarked\cs{term}[subterm]` makes an index entry for *term*[*subterm*], but *term* will be put in the index as `\cs{term}`, but still sorted as just *term*. `\idxmarked\cs{term}` also typesets `\cs{term}`. This provides for the usual ways of changing the typesetting of index entries. Example:

```
\def\article#1{{‘#1’}}
\sidxmarked\article{Miss Elsa and Aunt Sophie}
Peter Drucker’s \idxmarked\article{The Polanyis} is a remarkable
essay about a remarkable family.
```

- `\sidxsubmarked{term}\cs{subterm}` makes an index entry for *term*, *subterm* as usual, but also puts *subterm* in the index as `\cs{term}`. `\idxsubmarked{term}\cs{subterm}` also typesets *term* `\cs{subterm}`, in the unlikely event that your syntax is convoluted enough to make this useful. Example:

```
\def\title#1{{\sl #1}}
\sidxsubmarked{Anderson, Laurie}\title{Strange Angels}
The \idxsubmarked{Anderson}\title{Carmen} is a strange twist.
```

The commands above rely on MakeIndex’s feature for separating sorting of an index entry’s from its typesetting. You can use this directly by specifying an index entry as *sort@typeset*. For example:

```
\sidx{Ap-weight@$A_\pi$-weight}
```

will sort as *Ap-weight*, but print with the proper math. The @ here is MakeIndex’s default character for this purpose. See <http://www.ctan.org/tex-archive/indexing/>

makeindex. To make an index entry with an @ in it, you have to escape it with a backslash; Eplain provides no macros for doing this.

After any index command, Eplain runs `\hookaction{afterindexterm}`. Because the index commands always add a whatsit item to the current list, you may wish to preserve a penalty or space past the new item. For example, given a conditional `\if@aftersctnhead` set true when you're at a section heading, you could do:

```
\hookaction{afterindexterm}{\if@aftersctnhead \nobreak \fi}
```

4.12.1.2 Modifying index entries

All the index commands described in the previous section take an initial optional argument before the index term, which modify the index entry's meaning in various ways. You can specify only one of the following in any given command, except that **begin** and **end** can be specified together with `pagemarkup=cs` (separate them with a comma without a following space, like this: `[begin,pagemarkup=defn]`).

These work via MakeIndex's "encapsulation" feature. See [Section 4.12.3 \[Customizing indexing\], page 25](#), if you're not using the default characters for the MakeIndex operators. The other optional argument (specifying a subterm) is independent of these.

Here are the possibilities:

begin

end These mark an index entry as the beginning or end of a range. The index entries must match exactly for MakeIndex to recognize them. Example:

```
\sidx[begin]{future}[Cohen, Leonard]
...
\sidx[end]{future}[Cohen, Leonard]
```

will typeset as something like

```
future,
Cohen, Leonard, 65–94
```

see

This marks an index entry as pointing to another; the real index term is an additional (non-optional) argument to the command. Thus you can anticipate a term readers may wish to look up, yet which you have decided not to index. Example:

```
\sidx[see]{analysis}[archetypal]{archetypal criticism}
```

becomes

```
analysis,
archetypal, see archetypal criticism
```

seealso

Similar to **see** (the previous item), but also allows for normal index entries of the referencing term. The normal index entries have to be created separately—**seealso** does *not* contribute a page number to the index entry. For example, if you have indexed a term on pages 75, 97 and 114, and then add a **seealso** entry for the term:

```
\sidx[seealso]{archetypal criticism}[elements of]{dichotomies}
```

the index will contain

archetypal criticism,
elements of, 75, 97, 114, *see also* dichotomies

(Aside for the academically curious: The archetypally critical book I took these dichotomous examples from is Laurence Berman's *The Musical Image*, which I happened to co-design and typeset.)

`pagemarkup=cs`

This puts `\cs` before the page number in the typeset index, thus allowing you to underline definitive entries, italicize examples, and the like. You do *not* precede the control sequence `cs` with a backslash. (That just leads to expansive difficulties.) Naturally it is up to you to define the control sequences you want to use. Example:

```
\def\defn#1{\sl #1}
\idx[pagemarkup=defn]{indexing}
```

becomes something like

```
indexing, \defn{75}
```

4.12.1.3 Index entries with special characters

Indexing terms with special characters can become quite cumbersome because you have to keep both T_EX and MakeIndex happy at the same time. For example, while ‘!’ has no special meaning for T_EX, it is a subentry separator for MakeIndex, therefore you’d have to escape occurrences of literal ‘!’ in index terms. Things get even more interesting with characters which are special in both T_EX and MakeIndex.

This in turn has some implications for the non-silent forms of the indexing commands (see [Section 4.12.1 \[Indexing terms\]](#), page 19), since T_EX and MakeIndex use different conventions for escaping characters. For example, this will not typeset the exclamation point correctly within the text, while it will come out right inside the index, after MakeIndex strips the quoting character (“”):

```
\idx{"!}
```

This would have to be rewritten using the silent command:

```
!\sidx{"!}
```

In general, it is a good idea to eschew the non-silent commands whenever index term contains anything unusual.

To understand this keep in mind that indexing commands read the terms verbatim so that the terms can embed almost any character, and that’s what gets written into the ‘.idx’ file. The non-silent forms then typeset the term by rescanning the verbatim copy, therefore for the non-silent commands the term, besides being a valid MakeIndex input, must also represent a valid T_EX input. The silent commands don’t have this restriction—their terms only need to become valid T_EX input *after* MakeIndex processes the ‘.idx’ file and writes the ‘.ind’ file. This is what makes the non-silent commands less powerful and more troublesome when dealing with special characters.

Here’s an example showing that terms for the silent commands can contain almost any character:

```
\sidx[see]{comments}[with %@with \verbatim %"|endverbatim]
{commenting with \verbatim %"|endverbatim}
```

We didn't have to escape '%' in the sort string for MakeIndex, while we had to put it inside the verbatim environment (see [Section 4.7 \[Verbatim listing\]](#), page 11) in the part which MakeIndex will pass back to T_EX. Also, we had to escape the '|' character because it is special for MakeIndex. If you have trouble understanding the reasons for the different types of escaping used, it is best to examine the '.idx' and '.ind' files resulting from processing the above input.

As was mentioned, index terms can embed “almost any character”, so now we'll describe the exceptions.

The following characters are reset to their usual meanings because they are not useful verbatim: multiple consequent spaces are converted into a single space; ASCII tab characters are treated as spaces; ASCII return is treated as end-of-line (this means, among other things, that long terms can be broken across several lines).

You have to be careful with the begin- and end-group characters ('{' and '}' by default). If they are matched, you don't have to do anything special. For example:

```
\sidx {braces {, }@braces
\verbatim {"|endverbatim, \verbatim }"|endverbatim}
```

However, if they are not matched you have two problems on hand. The first one is T_EX—you have to instruct T_EX to use something else as begin- and/or end-group characters. Eplain provides an easy way to do this: just define \idxargopen and/or \idxargclose to the begin- and end-group characters you are going to use with indexing macros, and use braces inside index terms without any restrictions. Here's an example:

```
\def\idxargopen{'\<}
\def\idxargclose{'\>}
\sidx <left brace "{@left brace \verbatim "{"|endverbatim>
```

In this example we've also dealt with the second problem—braces are MakeIndex's grouping characters as well (by default), so we have escaped unmatched braces with ' '.

And the final note: if you need a subentry containing brackets ('[' and ']'), avoid the optional argument of \sidx and friends, and use instead MakeIndex's subentry separator to create the subentry with the brackets in it:

```
\sidx{entry!subentry with a bracket []}
```

4.12.1.4 Proofing index terms

As you are reading through a manuscript, it is helpful to see what terms have been indexed, so you can add others, catch miscellaneous errors, etc. (Speaking from bitter experience, I can say it is extremely error-prone to leave all indexing to the end of the writing, since it involves adding many T_EX commands to the source files.)

So Eplain puts index terms in the margin of each page, if you set \indexproofingtrue. It is **false** by default. The terms are typeset by the macro \indexproofterm, which takes a single argument, the term to be typeset. Eplain's definition of \indexproofterm just puts it into an \hbox, first doing \indexprooffont, which Eplain defines to select the font cmtt8. With this definition long terms run off the page, but since this is just for proofreading anyway, it seems acceptable.

On the other hand, we certainly don't want the index term to run into the text of the page, so Eplain uses the right-hand side of the page rather than the left-hand page (assuming

a language read left to right here). So `\ifodd\pageno`, Eplain kerns by `\outsidemargin`, otherwise by `\insidemargin`. If those macros are undefined, `\indexsetmargins` defines them to be one inch plus `\hoffset`.

To get the proofing index entries on the proper page, Eplain defines a new insertion class `\@indexproof`. To unbox any index proofing material, Eplain redefines `\makeheadline` to call `\indexproofunbox` before the original `\makeheadline`. Thus, if you have your own output routine, that redefines or doesn't use `\makeheadline`, it's up to you to call `\indexproofunbox` at the appropriate time.

4.12.2 Typesetting an index

The command `\readindexfile{i}` reads and typesets the `'ind'` file that MakeIndex outputs (from the `'idx'` file which the indexing commands in the previous sections write). Eplain defines a number of commands that support the default MakeIndex output.

More precisely, `\readindexfile` reads `\indexfilebasename.index-letternd`, where the *index-letter* is the argument. `\indexfilebasename` is `\jobname` by default, but if you have different indexes in different parts of a book, you may wish to change it, just as with bibliographies (see [Section 4.3 \[Citations\]](#), page 5).

MakeIndex was designed to work with L^AT_EX; therefore, by default the `'ind'` file starts with `\begin{theindex}` and ends with `\end{theindex}`. If no `\begin` has been defined, Eplain defines one to ignore its argument and set up for typesetting the index (see below), and also defines a `\end` to ignore its argument. (In a group, naturally, since there is a primitive `\end`).

Eplain calls `\indexfonts`, sets `\parindent = 0pt`, and does `\doublecolumns` (see [Section 4.16 \[Multiple columns\]](#), page 29) at the `\begin{theindex}`. `\indexfonts` does nothing by default; it's just there for you to override. (Indexes are usually typeset in smaller type than the main text.)

It ends the setup with `\hookrun{beginindex}`, so you can override anything you like in that hook (see [Section 7.6.3 \[Hooks\]](#), page 70). For example:

```
\hookaction{beginindex}{\triplecolumns}
```

MakeIndex turns each main index entry into an `\item`, subentries into `\subitem`, and subsubentries into `\subsubitem`. By default, the first line of main entries are not indented, and subentries are indented 1em per level. Main entries are preceded by a `\vskip` of `\aboveitemskipamount`, 0pt plus 2pt by default. Page breaks are encouraged before main entries (`\penalty -100`), but prohibited afterwards—Eplain has no provision for “continued” index entries.

All levels do the following:

```
\hangindent = 1em
\raggedright
\hyphenpenalty = 10000
```

Each entry ends with `\hookrun{indexitem}`, so you can change any of this. For example, to increase the allowable rag:

```
\hookaction{indexitem}{\advance\rightskip by 2em}
```

Finally, MakeIndex outputs `\indexspace` between each group of entries in the `'ind'` file. Eplain makes this equivalent to `\bigbreak`.

4.12.3 Customizing indexing

By default, MakeIndex outputs ‘, ’ after each term in the index. To change this, you can add the following to your MakeIndex style (‘.ist’) file:

```
delim_0 "\\afterindexterm "  
delim_1 "\\afterindexterm "  
delim_2 "\\afterindexterm "
```

Eplain makes `\afterindexterm` equivalent to `\quad`.

You can also change the keywords Eplain recognizes (see [Section 4.12.1.2 \[Modifying index entries\]](#), page 21):

```
\idxrangebeginword  
    ‘begin’  
  
\idxrangeendword  
    ‘end’  
  
\idxseecmdword  
    ‘see’  
  
\idxseealsocmdword  
    ‘seealso’
```

You can also change the magic characters Eplain puts into the ‘.idx’ file, in case you’ve changed them in the .ist file:

```
\idxsubentryseparator  
    ‘!’  
  
\idxencapoperator  
    ‘|’  
  
\idxbeginrangemark  
    ‘(’  
  
\idxendrangemark  
    ‘)’
```

There is no macro for the **actual** (‘@’ by default) character, because it’s impossible to make it expand properly.

You can change the (imaginary) page number that “see also” entries sort as by redefining `\idxmaxpagenum`. This is 99999 by default, which is one digit too many for old versions of MakeIndex.

The words output by Eplain for “see” and “see also” index entries are defined by `\indexseeword` and `\indexseealsowords` respectively. You can change the typeface used for these words by redefining `\seevariant`. And finally, the macros `\indexsee` and `\indexseealso` actually produce the “see ...” entries, so you can redefine them if you want something entirely different. If you do redefine them, make them take two parameters, the term being referenced and the `\idxmaxpagenum` (the latter should normally be ignored). See the example below.

Unfortunately, it is impossible to reliably control the commas produced by MakeIndex in front of “see ...” entries in the ‘.ind’ file, either at MakeIndex level or at Eplain level.

However, the `sed` script contained in `trimsee` distributed with Eplain in the ‘`util`’ directory can be used to filter out these commas from the output of MakeIndex. For example, suppose you want the following style for your “see . . .” entries:

```
analysis,
  archetypal (see archetypal criticism)
archetypal criticism,
  elements of, 75, 97, 114 (see also dichotomies)
```

You would need to redefine these macros in your T_EX file:

```
\def\indexsee#1#2{(\seevariant \indexseeword\ / }#1)}
\def\indexseealso#1#2{(\seevariant \indexseealsowords\ / }#1)}
```

and then filter out the commas in front of the “see . . .” entries by running the following command to produce the ‘`.ind`’ file (assuming the name of the ‘`.idx`’ file is ‘`myfile.idx`’ and the ‘`trimsee`’ script is placed in the current directory):

```
prompt$ cat myfile.idx | makeindex | ./trimsee > myfile.ind
```

By default, ‘`trimsee`’ uses default page list separators and default “see . . .” command names. If you set up MakeIndex to use different page list separator or change the names of `\indexsee` and `\indexseealso` commands, it is possible to adjust the ‘`trimsee`’ script through its command line options, which are the following:

```
‘-i is’    Use is as a regular expression matching separator before “see . . .” commands
            in the input (default: ‘, \+’).

‘-o os’    Use os as a separator to replace is before “see . . .” commands (default: ‘ ’).

‘-s see’   Use see as a regular expression matching “see . . .” commands (default:
            ‘\indexsee’).

‘-h’
‘--help’   Print a usage message.

‘-v’
‘--version’
            Print version.
```

‘`trimsee`’ reads input from the standard input, and directs its output to the standard output.

4.13 Justification

Eplain defines three commands to conveniently justify multiple lines of text: `\flushright`, `\flushleft`, and `\center`.

They all work in the same way; let’s take `\center` as the example. To start centering lines, you say `\center` inside a group; to stop, you end the group. Between the two commands, each end-of-line in the input file also starts a new line in the output file.

The entire block of text is broken into paragraphs at blank lines, so all the T_EX paragraph-shaping parameters apply in the usual way. This is convenient, but it implies something else that isn’t so convenient: changes to any linespacing parameters, such as `\baselineskip`, will have *no effect* on the paragraph in which they are changed. T_EX

does not handle linespacing changes within a paragraph (because it doesn't know where the line breaks are until the end of the paragraph).

The space between paragraphs is by default one blank line's worth. You can adjust this space by assigning to `\blanklineskipamount`; this (vertical) glue is inserted after each blank line.

Here is an example:

```
{\center First line.

      Second line, with a blank line before.
}
```

This produces:

First line.

Second line, with a blank line before.

You may wish to use the justification macros inside of your own macros. Just be sure to put them in a group. For example, here is how a title macro might be defined:

```
\def\title{\begingroup\titlefont\center}
\def\endtitle{\endgroup}
```

4.14 Tables

Eplain provides a single command, `\makecolumns`, to make generating one particular kind of table easier. More ambitious macro packages might be helpful to you for more difficult applications. The files `'ruled.tex'` and `'TXSruled.tex'`, available from <http://www.ctan.org/tex-archive/macros/texsis>, is the only one I know of.

Many tables are homogenous, i.e., all the entries are semantically the same. The arrangement into columns is to save space on the page, not to encode different meanings. In this kind of the table, it is useful to have the column breaks chosen automatically, so that you can add or delete entries without worrying about the column breaks.

`\makecolumns` takes two arguments: the number of entries in the table, and the number of columns to break them into. As you can see from the example below, the first argument is delimited by a slash, and the second by a colon and a space (or end-of-line). The entries for the table then follow, one per line (not including the line with the `\makecolumns` command itself).

`\parindent` defines the space to the left of the table. `\hsize` defines the width of the table. So you can adjust the position of the table on the page by assignments to these parameters, probably inside a group.

You can also control the penalty at a page break before the `\makecolumns` by setting the parameter `\abovecolumnspenalty`. Usually, the table is preceded by some explanatory text. You wouldn't want a page break to occur after the text and before the table, so Eplain sets it to 10000. But if the table produced by `\makecolumns` is standing on its own, `\abovecolumnspenalty` should be decreased.

If you happen to give `\makecolumns` a smaller number of entries than you really have, some text beyond the (intended) end of the table will be incorporated into the table, probably producing an error message, or at least some strange looking entries. And if you give

`\makecolumns` a larger number of entries than you really have, some of the entries will be typeset as straight text, probably also looking somewhat out of place.

Here is an example:

```
% Arrange 6 entries into 2 columns:
\makecolumns 6/2: % This line doesn't have an entry.
one
two
three
four
five
six
Text after the table.
```

This produces ‘one’, ‘two’, and ‘three’ in the first column, and ‘four’, ‘five’, and ‘six’ in the second.

4.15 Margins

T_EX’s primitives describe the type area in terms of an offset from the upper left corner, and the width and height of the type. Some people prefer to think in terms of the *margins* at the top, bottom, left, and right of the page, and most composition systems other than T_EX conceive of the page laid out in this way. Therefore, Eplain provides commands to directly assign and increment the margins.

```
\topmargin = dimen
\bottommargin = dimen
\leftmargin = dimen
\rightmargin = dimen
```

These commands set the specified margin to the *dimen* given. The = and the spaces around it are optional. The control sequences here are not T_EX registers, despite appearances; therefore, commands like `\showthe\topmargin` will not do what you expect.

```
\advancetopmargin by dimen
\advancebottommargin by dimen
\advanceleftmargin by dimen
\advancerrightmargin by dimen
```

These commands change the specified margin by the *dimen* given.

Regardless of whether you use the assignment or the advance commands, Eplain always changes the type area in response, not the other margins. For example, when T_EX starts, the left and right margins are both one inch. If you then say `\leftmargin = 2in`, the right margin will remain at one inch, and the width of the lines (i.e., `\hsize`) will decrease by one inch.

When you use any of these commands, Eplain computes the old value of the particular margin, by how much you want to change it, and then resets the values of T_EX’s primitive parameters to correspond. Unfortunately, Eplain cannot compute the right or bottom margin without help: you must tell it the full width and height of the final output page. It defines two new parameters for this:

`\paperheight`

The height of the output page; default is 11truein.

`\paperwidth`

The width of the output page; default is 8.5truein.

If your output page has different dimensions than this, you must reassign to these parameters, as in

```
\paperheight = 11truein
\paperwidth = 17truein
```

4.16 Multiple columns

Eplain provides for double, triple, and quadruple column output: say `\doublecolumns`, `\triplecolumns`, or `\quadcolumns`, and from that point on, the manuscript will be set in columns. To go back to one column, say `\singlecolumn`.

You may need to invoke `\singlecolumn` to balance the columns on the last page of output.

To do a “column eject”, i.e., move to the top of the next column, do `\columnfill`. This does not actually force an eject, however: it merely inserts a kern of size `\@normalvsize` minus `\pagetotal` (`\@normalvsize` being the usual height of the page; to implement multicolumns, Eplain multiplies `\vsize` itself by the number of columns). In most circumstances, a column break will be forced after this kern (during the column splitting operation when the whole page is output), as desired.

The columns are separated by the value of the `\dimen` parameter `\gutter`. Default value is two picas. If you want to add vertical material between the columns, use `\gutterbox`. For example, to put a vertical line between columns, define `\gutterbox` as

```
\def\gutterbox{\vbox to \dimen0{\vfil\hbox{\vrule height\dimen0}\vfil}}%
```

The dimension counter `\dimen0` contains the height of the column.

All the `\...columns` macros insert the value of the glue parameter `\abovecolumnskip` before the multicolumn text, and the value of the glue parameter `\belowcolumnskip` after it. The default value for both of these parameters is `\bigskipamount`, i.e., one linespace in plain TeX.

The macros take into account only the insertion classes defined by plain TeX; namely, footnotes and `\topinserts`. If you have additional insertion classes, you will need to change the implementation.

Also, Eplain makes insertions the full page width. There is no provision for column-width insertions.

4.17 Footnotes

The most common reference mark for footnotes is a raised number, incremented on each footnote. The `\numberedfootnote` macro provides this. It takes one argument, the footnote text.

If your document uses only numbered footnotes, you could make typing `\numberedfootnote` more convenient with a command such as:

```
\let\footnote = \numberedfootnote
```

After doing this, you can type your footnotes as `\footnote{footnote text}`, instead of as `\numberedfootnote{footnote text}`.

Eplain keeps the current footnote number in the count register `\footnotenum`. So, to reset the footnote number to zero, as you might want to do at, for example, the beginning of a chapter, you could say `\footnotenum=0`.

Plain T_EX separates the footnote marker from the footnote text by an en space (it uses the `\textindent` macro). In Eplain, you can change this space by setting the dimension register `\footnotemarkseparation`. The default is still an en.

You can produce a space between footnotes by setting the glue register `\interfootnoteskip`. The default is zero.

`\parskip` is also set to zero by default before the beginning of each footnote (but not for the text of the footnote).

You can also control footnote formatting in a more general way: Eplain expands the token register `\everyfootnote` before a footnote is typeset, but after the default values for all the parameters have been established. For example, if you want your footnotes to be printed in seven-point type, indented by one inch, you could say:

```
\everyfootnote = {\sevenrm \leftskip = 1in}
```

By default, an `\hrule` is typeset above each group of footnotes on a page. You can control the dimensions of this rule by setting the dimension registers `\footnoterulewidth` and `\footnoteruleheight`. The space between the rule and the first footnote on the page is determined by the dimension register `\belowfootnoterulespace`. If you don't want any rule at all, set `\footnoteruleheight=0pt`, and, most likely, `\belowfootnoterulespace=0pt`. The defaults for these parameters typeset the rule in the same way as plain T_EX: the rule is 0.4 points high, 2 true inches wide, with 2.6 points below it.

The space above the rule and below the text on the page is controlled by the glue register `\skip\footins`. The default is a plain T_EX `\bigskip`.

Eplain can create hypertext links for the footnote marks (see [Section 5.3.9 \[Footnote hyperlinks\]](#), page 45).

4.18 Fractions

Exercise 11.6 of *The T_EXbook* describes a macro `\frac` for setting fractions, but `\frac` never made it into plain T_EX. So Eplain includes it.

`\frac` typesets the numerator and denominator in `\scriptfont0`, slightly raised and lowered. The numerator and denominator are separated by a slash. The denominator must be enclosed in braces if it's more than one token long, but the numerator need not be. (This is a consequence of `\frac` taking delimited arguments; see page 203 of *The T_EXbook* for an explanation of delimited macro arguments.)

For example, `\frac 23/{64}` turns '23/64' into $^{23}/_{64}$.

4.19 Paths

When you typeset long pathnames, electronic mail addresses, or other such "computer" names, you would like T_EX to break lines at punctuation characters within the name, rather

than trying to find hyphenation points within the words. For example, it would be better to break the email address `letters@alpha.gnu.ai.mit.edu` at the ‘@’ or a ‘.’, rather than at the hyphenation points in ‘letters’ and ‘alpha’.

If you use the `\path` macro to typeset the names, \TeX will find these good breakpoints. The argument to `\path` is delimited by any character other than ‘\’ which does not appear in the name itself. ‘|’ is often a good choice, as in:

```
\path|letters@alpha.gnu.ai.mit.edu|
```

You can control the exact set of characters at which breakpoints will be allowed by calling `\discretionaries`. This takes the same sort of delimited argument; any character in the argument will henceforth be a valid breakpoint within `\path`. The default set is essentially all the punctuation characters:

```
\discretionaries |~!@%$^&*()_+‘-#{}[]:”;’<>,.?\/|
```

If for some reason you absolutely must use ‘\’ as the delimiter character for `\path`, you can set `\specialpathdelimiterstrue`. (Other delimiter characters can still be used.) \TeX then processes the `\path` argument about four times more slowly.

The `\path` macro comes from ‘path.sty’, written by Nelson Beebe and Philip Taylor and available at <http://www.ctan.org/tex-archive/macros/latex/contrib/misc/path.sty>.

4.20 Logos

Eplain redefines the `\TeX` macro of plain \TeX to end with `\null`, so that the proper spacing is produced when `\TeX` is used at the end of a sentence. The other \TeX macros listed here do this, also.

Eplain defines `\AMSTeX`, `\BibTeX`, `\AMSLaTeX`, `\LAMSTeX`, `\LaTeX`, `\MF`, and `\SLiTeX` to produce their respective logos. (Sorry, the logos are not shown here.) Some spelling variants of these are also supported.

All these macros come from ‘texnames.sty’, compiled by Nelson Beebe and available at <http://www.ctan.org/tex-archive/info/biblio/texnames.sty>.

4.21 Boxes

The solid rectangle that Eplain uses as a marker in unordered lists (see [Section 4.6 \[Lists\]](#), [page 9](#)) is available by itself: just say `\blackbox`.

You can create black boxes of arbitrary size with `\hrule` or `\vrule`.

You can also get unfilled rectangles with `\makeblankbox`. This takes two explicit arguments: the height and depth of the rules that define the top and bottom of the rectangle. (The two arguments are added to get the width of the left and right borders, so that the thickness of the border is the same on all four sides.) It also uses, as implicit arguments, the dimensions of `\box0` to define the dimensions of the rectangle it produces. (The contents of `\box0` are ignored.)

Here is an example. This small raised open box is suitable for putting next to numbers in, e.g., a table of contents.

```
\def\openbox{%
  \ht0 = 1.75pt \dp0 = 1.75pt \wd0 = 3.5pt
```



```
\raise 2.75pt \makeblankbox{.2pt}{.2pt}
}
```

Finally, you can put a box around arbitrary text with `\boxit`. This takes one argument, which must itself be a (T_EX) box, and puts a printed box around it, separated by `\boxitspace` white space (3 points by default) on all four sides. For example:

```
\boxit{\hbox{This text is boxed.}}
```

The reason that the argument must be a box is that when the text is more than one line long, T_EX cannot figure out the line length for itself. Eplain does set `\parindent` to zero inside `\boxit`, since it is very unlikely you would want indentation there. (If you do, you can always reset it yourself.)

`\boxit` uses `\ehrule` and `\evrule` so that you can easily adjust the thicknesses of the box rules. See [Section 4.2 \[Rules\]](#), page 5.

4.22 Checking for PDF output

pdfT_EX is a T_EX variant that can output both ‘.dvi’ and ‘.pdf’ (Adobe’s Portable Document Format) files (see <http://www.ctan.org/tex-archive/systems/pdftex>). You might sometimes want to know whether the target format is ‘.pdf’ or ‘.dvi’. The `\ifpdf` switch can be used to detect pdfT_EX in PDF mode:

```
\ifpdf
  This text is produced when pdfTeX is in PDF mode.
\else
  This text is produced when pdfTeX is in DVI mode,
  or when some program other than pdfTeX is used.
\fi
```

Keep in mind that `\ifpdf` is set based on the value of the `\pdfoutput` primitive of pdfT_EX at the time Eplain is loaded. If you change the value of `\pdfoutput` after you load Eplain, `\ifpdf` will not reflect the change.

Eplain defines `\ifpdf` by incorporating Heiko Oberdiek’s ‘`ifpdf.sty`’, which is available at <http://www.ctan.org/tex-archive/macros/latex/contrib/oberdiek/ifpdf.sty>.

4.23 Loading L^AT_EX packages

Eplain provides a limited support for loading L^AT_EX packages (‘.sty’ files—not ‘.cls’). This will mostly work for packages which were designed with plain T_EX compatibility in mind, which means that most L^AT_EX packages cannot be loaded. The packages which are known to work are listed below (see [Section 4.23.3 \[Packages known to work\]](#), page 34). If you discover a working package which is not in the list, please report it to the Eplain mailing list (see [Chapter 1 \[Introduction\]](#), page 1).

To set up a pseudo-L^AT_EX environment for the packages, Eplain uses ‘`miniltx.tex`’ (<http://www.ctan.org/tex-archive/macros/plain/graphics/miniltx.tex>) from the L^AT_EX graphics collection, written by David Carlisle and Sebastian Rahtz (the collection is available at <http://www.ctan.org/tex-archive/macros/latex/required/graphics>). Eplain extends ‘`miniltx.tex`’ to provide some additional features, e.g., support for package options.

4.23.1 The `\usepackage` command

`\usepackage` loads a \LaTeX package. Its syntax is similar to that of \LaTeX 's `\usepackage` command:

```
\usepackage[options]{packages}[version]
```

where *options* is a comma-separated list of package options, *packages* is a comma-separated list of packages to load (without the `.sty` suffix), and *version* is a package version number given as a date in the format `'YYYY/MM/DD'`. If an older version of the package is found, a warning is issued. If several packages are loaded within a single `\usepackage` command, the *options* will be applied to each of the packages. As usual, parameters in square brackets are optional and can be omitted (together with the square brackets).

For example:

```
\usepackage[foo,bar]{pack1,pack2}[2005/08/29]
```

will load packages `'pack1'` and `'pack2'`, each with the options `'foo'` and `'bar'`, and will check that each of the packages are dated 2005/08/29 or newer.

4.23.2 Environment for loading packages

Some packages request that certain commands are executed after all packages have been loaded. In \LaTeX , this means that the commands are executed at the beginning of the document, after the so-called *preamble*. Neither plain \TeX nor Eplain have any kind of preamble; therefore, Eplain requires that all packages be loaded inside a `\beginpackages... \endpackages` block, for example:

```
\beginpackages
  \usepackage[foo,bar]{pack1}
  \usepackage{pack2}
\endpackages
```

This requirement enables Eplain to execute the “delayed” commands at the end of the `\beginpackages... \endpackages` block.

For the same reason, it is advisable to specify only one such block per document, just like there is only one preamble in \LaTeX .

Some packages (and the pseudo- \LaTeX environment, `'miniltx.tex'`) redefine \TeX 's primitive `\input` to be a macro. Non-primitive `\input` is probably not what the user expects under plain \TeX . Therefore, at the beginning of the `\beginpackages... \endpackages` block Eplain saves the meaning of `\input` as `\eplaininput` and restores the original `\input` at the end of the block. This usually means that the primitive `\input` is restored, unless you (or some other macro package you've loaded directly) have redefined it before calling `\beginpackages`. In case you need to access the package-provided `\input`, Eplain saves it as `\packageinput`.

Sometimes you may encounter packages which make conflicting redefinitions of `\input`. Common symptoms are \TeX spewing incomprehensible error messages or hanging in a loop at a call to `\input`. This sometimes can be cured by restoring `\input` to `\eplaininput` before loading each package. For example:

```
\beginpackages
  \usepackage{pack1}
  \let\input\eplaininput
```

```
\usepackage{pack2}
\endpackages
```

4.23.3 Packages known to work

The following table lists packages that had been tested and are known to work with Eplain, and locations where you can find manuals for these packages. Some of the short descriptions of the packages were taken from the documentation for those packages.

autopict ('2001/06/04 v1.1j Picture mode autoload file')

<http://tug.org/eplain/misc/ltpictur.pdf>

This is the L^AT_EX “picture mode”, started by `\begin{picture}` and ended by `\end{picture}` (in L^AT_EX, this package is not explicitly loaded since it is part of the L^AT_EX kernel). It provides commands to draw simple figures inside your document without resorting to any external tools.

color ('1999/02/16 v1.0i Standard LaTeX Color (DPC)')

graphics ('2001/07/07 v1.0n Standard LaTeX Graphics (DPC,SPQR)')

graphicx ('1999/02/16 v1.0f Enhanced LaTeX Graphics (DPC,SPQR)')

<http://www.ctan.org/tex-archive/macros/latex/required/graphics/grfguide.pdf>

These packages are from the L^AT_EX graphics collection. They provide commands for changing text/page colors, text rotation and scaling, and much more.

Warning 1: If you encounter problems loading one of these packages under pdfT_EX (more specifically, when pdfT_EX reads ‘`supp-mis.tex`’), the cause may be an outdated ‘`supp-mis.tex`’ (part of ConT_EXt, a typesetting system for T_EX) installed on your system. The problem was fixed in ‘`supp-mis.tex`’ version 2004.10.26. You can obtain up-to-date versions of ‘`supp-mis.tex`’ and the accompanying ‘`supp-pdf.tex`’ from <http://www.ctan.org/tex-archive/macros/pdftex/graphics>. To convince T_EX to use the new files, you have the following options in the decreasing order of preference:

1. put the new files in the same directory with your document;
2. overwrite the outdated files installed by your T_EX distribution;
3. install the new ‘`supp-mis.tex`’ and ‘`supp-pdf.tex`’ files in the relevant subdirectory of your local ‘`texmf`’ tree (for info on T_EX directory structure see <http://www.tex.ac.uk/cgi-bin/texfaq2html?label=tds>);
4. upgrade your ConT_EXt installation.

Note that option 1 is the safest but provides the fix only for your current document. Options 2 and 3 will usually suffice for Eplain but may break ConT_EXt. Option 4 is the most general but is more complicated than the first three. Be sure to backup any files you overwrite. Also keep in mind that upgrading your T_EX distribution may overwrite files you install in the system ‘`texmf`’ tree.

End of warning 1.

Warning 2: If you encounter problems using the `\pagecolor` command from the ‘`color.sty`’ package under pdfT_EX, the cause may be an outdated pdfT_EX color and graphics driver ‘`pdftex.def`’. The problem was fixed in ‘`pdftex.def`’ version 0.03p. You can obtain an up-to-date version from <http://www.ctan.org/>

`tex-archive/graphics/pdftex/pdftex.def`.

End of warning 2.

The ‘`graphics`’/‘`graphicx`’ packages have the option `draft` which instructs `\includegraphics` not to include the graphics but instead typeset a box with the dimensions of the graphics and the name of the graphics file in typewriter type at the center of the box. These packages expect the L^AT_EX-provided command `\ttfamily` to switch to the typewriter type. This command is not defined by ‘`miniltx.tex`’, therefore Eplain defines it and makes it equivalent to plain T_EX’s `\tt`.

See Section 8.1 [Hyperlinks (`xhyper.tex`)], page 76, for the demonstration of text rotation and graphics inclusion using the ‘`graphicx`’ package, and using the ‘`color`’ package to colorize hypertext links.

Klaus H^oppner has written a nice introduction to the L^AT_EX graphics packages and different graphics formats. You can download it from

<http://www.tug.org/pracjourn/2005-3/hoepner>

epstopdf (‘2001/02/04 v1.1 Conversion with epstopdf on the fly (H0)’)

<http://www.ctan.org/tex-archive/macros/latex/contrib/oberdiek>

This package does on-the-fly conversion of Encapsulated PostScript (EPS) graphics into Portable Document Format (PDF) graphics for inclusion with the `\includegraphics` command from the ‘`graphics`’/‘`graphicx`’ packages, so that you do not have to explicitly call the ‘`epstopdf`’ script.

psfrag (‘1998/04/11 v3.04 PSfrag (MCG)’)

<http://www.ctan.org/tex-archive/macros/latex/contrib/psfrag/pfgguide.pdf>

PSfrag allows the user to precisely overlay Encapsulated PostScript (EPS) files with arbitrary (L^a)T_EX constructions. In order to accomplish this, the user places a simple text “tag” in the graphics file, as a “position marker” of sorts. Then, using simple (L^a)T_EX commands, the user instructs PSfrag to remove that tag from the figure, and replace it with a properly sized, aligned, and rotated (L^a)T_EX equation.

soul (‘2003/11/17 v2.4 letterspacing/underlining (mf)’)

<http://www.ctan.org/tex-archive/macros/latex/contrib/soul>

This package provides hyphenatable letterspacing (spacing out), underlining, and some derivatives. The package is optimized for L^AT_EX, but works with plain T_EX—you don’t actually need to load it with the `\usepackage` command, just say `\input soul.sty`. If you intend to use the highlighting macros of ‘`soul`’, don’t forget to load the ‘`color`’ package.

url (‘2005/06/27 ver 3.2 Verb mode for urls, etc.’)

<http://www.ctan.org/tex-archive/macros/latex/contrib/misc/url.sty>

This package provides a form of `\verbatim` that allows line breaks at certain characters or combinations of characters, accepts reconfiguration, and can usually be used in the argument to another command. It is intended for email addresses, hypertext links, directories/paths, etc., which normally have no spaces.

Eplain can create hypertext links with the `\url` command (see [Section 5.3.2 \[URL hyperlinks\]](#), page 40).

Be sure to get a version dated at least 2005/06/27, as older versions have problems in plain T_EX.

4.23.4 Packages known not to work

The following packages are known not to work with Eplain:

`hyperref` <http://www.ctan.org/tex-archive/macros/latex/contrib/hyperref>

This package depends heavily on L^AT_EX, so that it is mostly unusable outside of L^AT_EX. Eplain provides its own macros for creating hyperlinks, see [Chapter 5 \[Hyperlinks\]](#), page 37.

`pict2e` ('2005/07/15 v0.2r Improved picture commands (HjG,RN)')

<http://www.ctan.org/tex-archive/macros/latex/contrib/pict2e>

`xcolor` ('2005/06/06 v2.03 LaTeX color extensions (UK)')

<http://www.ctan.org/tex-archive/macros/latex/contrib/xcolor>

5 Hyperlinks

This chapter describes the support which Eplain provides for hypertext links (*hyperlinks* for short). Hyperlinks can be created implicitly by the cross-reference, indexing and other macros in Eplain. Macros for constructing explicit hyperlinks are also provided.

5.1 Introduction to hyperlinks

The original \TeX engine has no built-in support for hyperlinks (a.k.a. hypertext links). Many of the present-day file formats with hyperlinking capabilities did not even exist at the time \TeX was written. However, \TeX 's `\special` primitive can be used to instruct \TeX to write special directives into its `.dvi` output file. These directives are not interpreted by \TeX in any way; they are intended for programs which process the `.dvi` files produced by \TeX , be it printing or converting to other formats, such as `.ps` or `.pdf`.

Another approach is to extend the original \TeX engine with the ability to generate one of the hyperlinking formats; \TeX 's set of primitives can be extended to include hyperlink commands. This is the approach used by the pdf \TeX engine, which is capable of producing `.pdf` files directly from the \TeX source, skipping the `.dvi` generation and processing step.

It turns out that the sets of commands for different formats are mostly not interchangeable, as each of the file formats has its own quirks and capabilities. And this is where Eplain *hyperlink drivers* come into play.

In order for Eplain to generate proper commands, Eplain has to know two things: which engine or `.dvi` processor you are using, and the set of commands it understands.

The knowledge about the commands that the various processors understand is programmed into Eplain's hyperlink drivers. Eplain provides three drivers: `hypertex` (implementation of the Hyper \TeX standard, see <http://arxiv.org/hypertex>), and `pdftex` and `dvipdfm` (named after the programs which process the hyperlink commands, pdf \TeX and dvipdfm). Therefore, Eplain can only produce Hyper \TeX commands and hyperlink commands for one of these two programs—except that the extended `dvipdfmx` program can be used as well as the original `dvipdfm`, since they are compatible.

To tell Eplain which `.dvi` processor or extended \TeX engine you are using, use the command `\enablehyperlinks`.

For example:

```
\enablehyperlinks
```

instructs Eplain to attempt to automatically detect which driver to use, as follows: if it detects pdf \TeX in PDF mode, it loads the `pdftex` driver. If it does not detect pdf \TeX in PDF mode, the `hypertex` driver is loaded. The detection is based on the `\ifpdf` switch (see [Section 4.22 \[Checking for PDF output\]](#), page 32).

If necessary, you can explicitly specify the driver name:

```
\enablehyperlinks[pdftex]
```

will start producing hyperlinks under the assumption that you are using pdf \TeX .

Eplain does not produce any hyperlinks until you explicitly enable them with `\enablehyperlinks`. For one thing, this keeps Eplain backward-compatible with previous

releases without hyperlink support. For another, you may be using a program other than pdfT_EX or dvipdfm, which does not understand their hyperlink commands or the HyperT_EX commands.

Concepts and Terminology

In general, hyperlinks work as follows. You mark some place in your document as a hyperlink destination, associating a *hyperlink label* with that destination. Next, somewhere within your document, you create a hyperlink, using a label to identify the destination you want this link to point to. A hyperlink is a region in the document (which can take many forms, for example, text or a picture); when a user clicks on that region, they will be taken to a place in the document marked by the corresponding destination. The following two sections (Section 5.2 [Explicit hyperlinks], page 38, and Section 5.3 [Implicit hyperlinks], page 39) describe the macros you can use to define destinations and create links pointing to those destinations.

In the rest of this chapter, we will often need to refer to links and destinations jointly, in which case we will use the term *hyperlinks*. We will use the terms *links* and *destinations* in cases when we need to refer specifically to links or destinations.

Hyperlink drivers provide several kinds of links and destinations. We will refer to them as *link types* and *destination types*.

For example, one of the destination types that the pdf_{tex} driver provides is the ‘xyz’ type; when the user follows a link pointing to an ‘xyz’ destination, the exact location marked by that destination is displayed. Another destination type provided by the pdf_{tex} driver is the ‘fit’ type; when the user follows a link pointing to a ‘fit’ destination, the page containing that destination is zoomed to fit into the window in which the document is displayed.

Similarly, drivers support various link types. For example, with the pdf_{tex} driver, the usual link type used to refer to destinations in the current document is called ‘name’. You can also create a link pointing to another local document (by using the ‘filename’ link type) or to a URL (by using the ‘url’ link type).

In addition, each hyperlink driver supports a number of destination and link *options*. By setting these options you can customize hyperlink parameters (e.g., the thickness of the border drawn around a hyperlink) or pass information to hyperlinks (for example, file name of a document, for a link pointing to a destination in another document).

See Section 5.4 [Hyperlink drivers], page 45, for the description of hyperlink types and options supported by the drivers. See Section 5.5 [Setting hyperlink types and options], page 55, for the information on how to set hyperlink options.

5.2 Explicit hyperlinks

Explicit hyperlinks are created by you, in the source of your document. The simplest command is \hldest, which marks the current position in your document as a destination:

```
\hldest{type}{options}{label}
```

Here *type* is one of the destination types supported by the hyperlink driver (see Section 5.4 [Hyperlink drivers], page 45), *options* is a comma-separated list of option assignments, and *label* is the hyperlink label to associate with this destination. This label will identify the

destination when creating links pointing to this destination. For example, with the `pdftex` driver, the command

```
\hldest{xyz}{zoom=2000}{index}
```

creates a destination of type ‘xyz’ (“the current position”), sets the magnification ratio for this destination to be 200%, and associates the label `index` with the destination.

Another command, `\hlstart`, paired with `\hlend`, turns all intervening material into a link:

```
\hlstart{type}{options}{label} ... \hlend
```

Here *type*, *options* and *label* have the same meaning as for `\hldest`. Continuing the previous example,

```
\hlstart{name}{bstyle=U,bwidth=2}{index} Index\hlend
```

typesets the word ‘Index’ as a link with underline border of width 2 PostScript points, pointing to the named destination `index` defined in the previous example. (The other options, like highlight mode and border color, are determined by the defaults, see [Section 5.5.1 \[Setting default types and options\]](#), page 55).

The *label* argument of both `\hldest` and `\hlstart` can contain special characters (such as ‘#’, ‘%’, ‘&’, ‘~’, etc.) without any escaping. This is especially important for URL links supported by some drivers (see [Section 5.4 \[Hyperlink drivers\]](#), page 45).

Both `\hldest` and `\hlstart` ignore following spaces.

Both `\hldest` and `\hlstart` expand the first token of *options* once, so you can save a list of options in a macro and pass it for the *options*. For example:

```
\def\linkopts{bstyle=U,bwidth=2}
\hlstart{name}{\linkopts}{index}Index\hlend
```

is functionally equivalent to the previous example.

See [Section 8.1 \[Hyperlinks \(xhyper.tex\)\]](#), page 76, for a demonstration of the usage of explicit hyperlinks.

5.3 Implicit hyperlinks

Implicit hyperlinks are hyperlinks created implicitly by various Eplain macros, such as the macros for citations, cross-references, indexing, etc.

All such macros are divided into *link groups* and *destination groups* (or *linkgroups* and *destgroups* for short) so that parameters can be set individually for each group. For example, all equation macros which define a destination are assigned to the ‘eq’ *destgroup*; equation macros which create a link are assigned to the ‘eq’ *linkgroup*. By setting parameters for the ‘eq’ *linkgroup* (*destgroup*), you can uniformly customize all links (destinations) related to equation references, without interfering with settings for the other groups.

See [Section 5.5 \[Setting hyperlink types and options\]](#), page 55, for information on how to set parameters for a group.

Here is the list of the *linkgroups*:

```
hrefint, hrefext, url, cite, ref, xref, eq, idx, foot, footback.
```

And here are the *destgroups*:

bib, li, definexref, xrdef, eq, idx, foot, footback.

See [Section 8.1 \[Hyperlinks \(xhyper.tex\)\]](#), [page 76](#), for a demonstration of the usage of implicit hyperlinks.

The following subsections describe each of the linkgroups and destgroups and the hyper-link support provided.

5.3.1 General hyperlinks: hrefint, hrefext

`\href{url}{text}` typesets *text* as a link to *url*. It basically does what the explicit hyper-link macros do (see [Section 5.2 \[Explicit hyperlinks\]](#), [page 38](#)), but is more convenient (at the expense of flexibility).

If *url* starts with ‘#’, the rest of *url* is assumed to be a local hyperlink destination name (destination within the same document). Parameters for these links can be set by customizing the ‘hrefint’ linkgroup. For example:

```
See \href{#intro}{Introduction}
```

will make ‘Introduction’ into an internal link, which might have been created, e.g., with `\xrdef{intro}`.

If *url* does not start with ‘#’, it is assumed to be a URL link. Parameters for these links can be set by customizing the ‘hrefext’ linkgroup. The special characters (such as ‘#’ and ‘~’) in the URL don’t need to be escaped. For example:

```
\href{http://tug.org/eplain/doc/eplain.html#Hyperlinks}{Hyperlinks  
in Eplain}
```

See [Section 5.3.2 \[URL hyperlinks\]](#), [page 40](#), for another way to create URL hyperlinks.

The *text* argument of `\href` can contain verbatim text (see [Section 4.7 \[Verbatim listing\]](#), [page 11](#)) or other macros which manipulate character catcodes. For example:

```
\href{#WeirdChars}{The weird chars \verbatim #&%$~|endverbatim}
```

`\href` does not currently handle other link types, such as ‘file:’ and ‘run:’ links.

5.3.2 URL hyperlinks: url

The ‘url’ linkgroup covers the `\url` command from the L^AT_EX package ‘url’ (see [Section 4.23.3 \[Packages known to work\]](#), [page 34](#)), as well as any new `\url`-like commands you define. The type for this linkgroup is set to ‘url’ by the drivers which support this link type. ‘url’ links use the parameter to the `\url` command as the URL to point to.

You may be using the `\url` command to typeset something other than a URL, e.g., a path, for which you do not want a link to be created; in that case, you can disable the ‘url’ linkgroup with the command `\hloff[url]` (see [Section 5.6.2 \[Turning hyperlinks on/off for a group\]](#), [page 58](#)).

By default, URL (and other types of) links are boxed, so that they are visually marked even if you do not load the L^AT_EX ‘color’ package (see [Section 4.23 \[Loading LaTeX packages\]](#), [page 32](#)) and therefore link text is not colored. You can see the effect by compiling the following code snippet (be sure to get a modern ‘url.sty’, older versions do not work in plain T_EX; see [Section 4.23.3 \[Packages known to work\]](#), [page 34](#)):

```
\input eplain  
\beginpackages
```



```

\usepackage{url}
\endpackages

\enablehyperlinks

\url{http://foo/bar}
\bye

```

If the hyperlink driver you use supports the link option `bwidth` (see [Section 5.4 \[Hyperlink drivers\]](#), page 45), you can produce colored links with no border around them. Try this:

```

\input eplain
\beginpackages
  \usepackage{url}
  \usepackage{color}
\endpackages

\enablehyperlinks
\hlopts{bwidth=0}

\url{http://foo/bar}
\bye

```

The command `\hlopts{bwidth=0}` sets border width to zero as the default for all links, and loading the ‘color’ package automatically colors links using the default color (see [Section 5.4.1 \[Options supported by all drivers\]](#), page 46). If you want the border width setting to apply to URL links only, say `\hlopts[url]{bwidth=0}` (see [Section 5.5 \[Setting hyperlink types and options\]](#), page 55).

5.3.3 Citation hyperlinks: `cite`, `bib`

The ‘cite’ linkgroup includes only the `\cite` command (see [Section 4.3 \[Citations\]](#), page 5). `\cite` turns each of the references in the list into a link pointing to the respective bibliography entry produced by the `\bibliography` command.

The ‘bib’ destgroup includes the macros related to the `\bibliography` command (see [Section 4.3 \[Citations\]](#), page 5). `\bibliography` inputs a ‘.bbl’ file, which contains a list of bibliography entries. For each of the entries, a destination is defined.

Both commands use the citation label as the hyperlink label.

5.3.4 List hyperlinks: `li`

The ‘li’ destgroup consists of the `\li` command (see [Section 4.6 \[Lists\]](#), page 9), which defines a destination if you supply the optional argument (cross-reference label). This label is also used as the hyperlink label.

5.3.5 Cross-reference hyperlinks: `definexref`, `ref`

The ‘definexref’ destgroup is for the `\definexref` command (see [Section 4.9.1 \[Defining generic references\]](#), page 14). `\definexref` defines a destination using the cross-reference label (the first argument) as the hyperlink label.

The ‘ref’ linkgroup includes `\refn` and `\xrefn` (they are synonyms), `\ref`, and `\refs` (see [Section 4.9.2 \[Using generic references\]](#), page 15).

`\refn` turns the cross-reference it produces into a link, using the cross-reference label as the hyperlink label. If an optional argument is present, it is tied by `\reftie` to the reference and become part of the link.

`\ref` works similarly to `\refn`. It takes an optional argument, which is treated the same way as the optional argument to `\refn`. In addition, `\ref` can produce a “class word”. Both the optional argument and the class word become part of the link, when present. The cross-reference is tied by `\reftie` to the preceding word. The optional argument is separated from the class word by `\refspace`.

Unlike `\ref`, `\refs` does not take an optional argument and does not make the class word part of the link, which is appropriate for its intended use.

5.3.6 Page reference hyperlinks: `xrdef`, `xref`

The ‘xrdef’ destgroup is for `\xrdef` (see [Section 4.10 \[Page references\]](#), page 15). `\xrdef` defines a destination using cross-reference label as the hyperlink label.

The ‘xref’ linkgroup includes the `\xref` command (see [Section 4.10 \[Page references\]](#), page 15). `\xref` turns its optional argument (followed by `\refspace`), `\xrefpageword` and the cross-reference (page number) into a link, using the cross-reference label as the hyperlink label.

5.3.7 Equation reference hyperlinks: `eq`

All commands that define equation labels are part of the ‘eq’ destgroup. These are `\eqdef`, `\eqdefn`, `\eqsubdef` and `\eqsubdefn` (see [Section 4.11 \[Equation references\]](#), page 16). All these commands use the equation label as the hyperlink label. However, if the equation label is empty, they make up a (hopefully) unique hyperlink label for the destination. This label will be used for the link when you refer to this empty-labeled equation with one of the equation reference macros.

The command `\phantomeqlabel` is called to generate hyperlink labels for the empty-labeled equations. By default, it produces the labels in the format ‘PHEQ*number*’, where *number* comes from the count register `\phantomeqnumber`; this count register is incremented at every empty-labeled equation definition.

The commands `\eqref` and `\eqrefn` (see [Section 4.11 \[Equation references\]](#), page 16) form the ‘eq’ linkgroup. These commands take an optional argument, which, when present, is tied with `\reftie` to the equation reference and becomes part of the link. The equation label is used for the hyperlink label; if the label is empty, the link is for the label generated for the last empty-labeled equation.

5.3.8 Index hyperlinks: `idx`

All indexing commands (`\idx`, `\idxname`, `\idxmarked`, `\idxsubmarked` and their silent equivalents, see [Section 4.12.1.1 \[Indexing commands\]](#), page 20) form the ‘idx’ destgroup. The ‘idx’ linkgroup consists of the macros which are used to typeset the index when you say `\readindexfile{index-letter}` (see [Section 4.12.2 \[Typesetting an index\]](#), page 24).

To create the links in index entries, Eplain uses MakeIndex’s “encapsulation” feature. When you use an indexing macro to mark an index term, Eplain writes out a line to the ‘.idx’ file of the following general form:

```
\indexentry{entry|pagemarkup}{pageno}
```

where *entry* is the index entry (converted into the internal format that MakeIndex understands), *cs* is the markup command you specified with the `pagemarkup=cs` optional argument to the indexing commands (see [Section 4.12.1.2 \[Modifying index entries\]](#), page 21), and *pageno* is the page number on which the term appeared. When processing the ‘.idx’ file, MakeIndex makes the page number an argument to the page markup command (“encapsulates” the page number), so the page number in the ‘.ind’ file appears as `\cs{pageno}`. Eplain internally replaces the *cs* command name with its own command, which, in addition to calling the original `\cs` encapsulator, turns the page number into a link.

Eplain provides two approaches to linking page numbers in the index to locations of index terms in the text.

5.3.8.1 Exact destinations for index terms

In this approach, each command that marks an index term defines a unique destination and passes its label on to the ‘.idx’ file as part of the `\indexentry` command. The `\indexentry` line that Eplain writes to the ‘.idx’ file becomes

```
\indexentry{entry|hidx{label}{cs}}{pageno}
```

where `\hidx` is the command that is defined by Eplain to take three arguments: a hyperlink label (*label*), a name of page number encapsulator (*cs*) and a page number (*pageno*). In the ‘.ind’ file that MakeIndex will generate, the page number will now appear as

```
\hidx{label}{cs}{pageno}
```

The result of this command is `\cs{pageno}`, wrapped up into a link pointing to *label* destination.

The hyperlink labels for the index terms are generated by the `\hidxlabel` command, by default in the format ‘*IDXnumber*’, where *number* is the value of the count register `\hidxlabelnumber`. This count register is incremented at each index term.

The advantage of this approach, as compared to the second approach described below, is that links in the index point to exact locations of the indexed terms on the page. The disadvantage of this approach is that MakeIndex will regard *all* index entries as distinct, because each one contains a (unique) hyperlink label. This disadvantage can be partially overcome by the script ‘*idxuniq*’ distributed with Eplain in the ‘*util*’ directory. This script filters out `\indexentry` lines differing only in the hyperlink label but identical otherwise. You should process the ‘.idx’ with this script before passing it on to MakeIndex. For example:

```
prompt$ ./idxuniq file.idx | makeindex > file.ind
```

Still, this solution is not ideal, as the page-range formation ability of MakeIndex will not work, and there will be problems of apparently identical index entries clashing (e.g., when a range-end entry appears on the same page as another entry with the same definition; ‘*idxuniq*’ will not filter out the second entry).

5.3.8.2 Page destinations for index terms

In the second approach, Eplain does not write out any destination labels for the index terms. Instead, Eplain writes out a wrapper for page number encapsulator which can parse the page number and generate a link pointing to the *page* on which the term appeared. On top of each page containing an index term, Eplain defines a destination with label produced by `\hlidxpagelabel`. The `\hlidxpagelabel` command takes a single argument (page number *number*) and by default produces the label in the format ‘IDXP G *number*’.

With this approach, the `\indexentry` line which Eplain writes to the `.idx` file looks like this:

```
\indexentry{entry|hlidxpage{cs}}{pageno}
```

where `\hlidxpage` is the command that is defined by Eplain to take two arguments: a name of page number encapsulator (*cs*) and a page number (*pageno*). In the ‘.ind’ file that MakeIndex will generate, the page number will appear as

```
\hlidxpage{cs}{pageno}
```

The advantage of this approach is that all features of MakeIndex are intact. The drawback is that links in the index do not point to exact locations of indexed terms on a page, but to the top of a page on which the term appears.

Another disadvantage is that this approach depends on the page range and page list separators which MakeIndex was configured to output. `\hlidxpage` must be able to parse the first page number in a page range like ‘1--4’. In addition, page list parsing is needed because MakeIndex combines two consecutive page numbers in one call to the page number encapsulator, so `\hlidxpage` can be passed, e.g., ‘1, 2’ for the *pageno*. In this last case, `\hlidxpage` splits the two page numbers, applies `\cs` to each of them, and makes each of the page numbers a link to the appropriate page. Note that this will alter typesetting slightly, because now the page list separator (a comma followed by a space, by default) is not typeset using the page number encapsulator (`\cs`).

Eplain’s defaults for the page list and page number delimiters are the same as those in MakeIndex, a comma followed by a space (‘, ’) and two dashes (‘--’), respectively. If you customize MakeIndex to use different delimiters, you must not forget to let Eplain know about them with the commands

```
\setidxpagelistdelimiter{list-delim}
\setidxpagerangedelimiter{page-delim}
```

(see [Section 7.12 \[Page list and page range parsers\]](#), page 74).

5.3.8.3 Choosing destination placement

The approach that Eplain should use for the index terms can be selected in the `\enablehyperlinks` command. The optional argument it accepts is a comma-separated list of options. The `idxexact` option selects the first approach, `idxpage` the second, and `idxnone` disables hyperlink support for the index terms altogether, in case you want to stop Eplain from writing its link wrappers into the ‘.idx’ file. The default is `idxpage`.

For example:

```
\enablehyperlinks[idxexact]
```

selects the first approach (“exact index links”).

5.3.8.4 Index page list and page range parsers

The macros that Eplain uses to parse page lists and page ranges, `\idxparselist` and `\idxparserange`, can sometimes be useful when defining page number encapsulators. See [Section 7.12 \[Page list and page range parsers\], page 74](#), for the description of these commands and an example of their usage.

5.3.8.5 Hyperlinks in see and see also entries

There is no automatic support for hyperlinks with “see” and “see also” index entries, as there is not enough information to trace the parameters of `\indexsee` and `\indexseealso` to corresponding index entries. But if desired, this can be implemented with `\hldest` and `\hlstart` (see [Section 5.2 \[Explicit hyperlinks\], page 38](#)); for example:

```
\sidx{semantic theory of truth%
      \leavevmode\hldest{}{}{idx:theo truth}semantic theory of truth}
...
\sidx[seealso]{truth}[definition of]%
      {\hlstart{}{}{idx:theo truth}semantic theory of truth\hlend}
```

5.3.9 Footnote hyperlinks: foot, footback

The ‘foot’ link and destination groups include the `\numberedfootnote` and `\footnote` macros (see [Section 4.17 \[Footnotes\], page 29](#)). The ‘footback’ groups include the same macros, but control parameters for links and destinations created inside the footnote to point back to the footnote mark within the text body.

The macros use hyperlink labels generated by `\hlfootlabel` and `\hlfootbacklabel`. The default formats for the labels are ‘FOOT $number$ ’ and ‘FOOTB $number$ ’, respectively, where $number$ is the value of the count register `\hlfootlabelnumber`. This register is incremented at every footnote.

Generally, footnote hyperlinks are not of much use, because the footnotes are usually placed on the same page as the footnote mark. Therefore, footnote hyperlinks are disabled by default. Here is how you can turn them on selectively, without affecting the other kinds of hyperlinks (see [Section 5.6.2 \[Turning hyperlinks on/off for a group\], page 58](#)):

```
\hldeston[foot,footback]
\hlon[foot,footback]
```

5.3.10 Contents hyperlinks

There is currently no special support for hyperlinks in the table of contents (see [Section 4.8 \[Contents\], page 12](#)), but implementing them with the `\hldest` and `\hlstart ... \hlend` commands (see [Section 5.2 \[Explicit hyperlinks\], page 38](#)) should be possible.

5.4 Hyperlink drivers

This section describes the hyperlink drivers: the types of hyperlinks they support, and the options they accept. During the first reading, you may only want to skim through this section.

Some of the descriptions below come from *Portable Document Format Reference Manual Version 1.3*, March 11, 1999.

5.4.1 Options supported by all drivers

This subsection describes the destination and link options which are supported by all hyperlink drivers.

Destination options supported by all drivers

raise Specifies how much to raise destinations above the baseline. When set to zero or empty, destinations are placed at the baseline.

It is usually convenient to set this option to some variable parameter, so that the height to which destinations are raised is automatically adjusted according to the current context. For example, setting it to `\normalbaselineskip` (or some fraction of it, like `1.7\normalbaselineskip`) makes the setting appropriate for different point sizes, in case your document uses more than one.

The default setting is `\normalbaselineskip`. Initially, the destgroups do not define this option, so they fall back on the default, except for the ‘eq’ destgroup, for which this option is set to `1.7\normalbaselineskip`, to accommodate the usual cases of large operators in displayed math.

Example: `\hldestopts[eq]{raise=2.5\normalbaselineskip}`

Link options supported by all drivers

colormodel

color These two options define the color to be used for rendering the link text. The colors are used only when a `\color` command is defined, e.g., by loading the L^AT_EX ‘color’ package (see [Section 4.23.3 \[Packages known to work\]](#), page 34). The `\color` command is called as `\color[colormodel]{color}`, where *colormodel* and *color* are the definitions of the `colormodel` and `color` options, respectively. However, if *colormodel* is empty, the optional argument to `\color` is omitted; and if *color* is empty, the `\color` command is omitted altogether. The default setting is *colormodel*=cm_YK and *color*=0.28,1,1,0.35.

When specifying colors with several components delimited by commas (e.g., RGB and CMYK colors in the L^AT_EX ‘color’ package), it is not possible to specify the components directly in the option list of `\hlopts`, because comma is the option list delimiter. With the ‘color’ package, it is possible to specify such colors by defining a custom color with `\definecolor` and using the new color name with an empty *colormodel* (see examples below).

Examples:

```
\hlopts{colormodel=,color=blue}% predefined color
\definecolor{mycolor}{rgb}{.3,.8,.95}
\hlopts{colormodel=,color=mycolor}% custom color
\hlopts{colormodel=gray,color=.4}
```

5.4.2 Hyperlink driver hypertex

HyperT_EX is a standard for inclusion of hyperlink information in T_EX (and L^AT_EX) documents (see <http://arxiv.org/hypertex>). This standard defines a set of hyperlink tags implemented as `\special` commands written into the DVI file. The major advantage of

such standard is that a single ‘.dvi’ file containing HyperTeX commands can be viewed by any HyperTeX-enabled viewer (e.g., any more or less modern version of `xdvi`) or converted to other file formats (e.g., PDF) by any HyperTeX-enabled DVI converter (e.g., `dvipdfmx` or `dvips` with Ghostscript’s `ps2pdf` script).

The downside to the standard is that it is by design “the common factor” of other formats supporting hyperlinks, so many features of a particular file format cannot be supported by HyperTeX. Therefore, if you need to use special features of a particular format, HyperTeX is not a good choice. For the PDF file format, Eplain provides the `pdftex` and `dvipdfm` drivers which provide fine control over the PDF options (see [Section 5.4.3 \[Hyperlink drivers pdftex and dvipdfm\]](#), page 49).

For more information on programs which support the HyperTeX standard, please see

<http://arxiv.org/hypertex>

<http://www.tug.org/tex-archive/support/hypertex/hypertex>

For convenience, we list a few HyperTeX-enabled converters:

dvips Note that you need to pass the ‘-z’ option to `dvips` to tell it to preserve the information about the hyperlinks. To generate a ‘.pdf’ file with hyperlinks, you can use the ‘`ps2pdf`’ script of Ghostscript. For example, if ‘`foo.tex`’ is a TeX file using HyperTeX commands, then

```
prompt$ tex foo.tex
prompt$ dvips -z foo.dvi -o
prompt$ ps2pdf foo.ps
```

will produce ‘`foo.pdf`’ with hyperlinks.

dvipdfm

dvipdfmx No special command line arguments are required, these programs automatically detect the HyperTeX commands.

One more note is in place: support for the HyperTeX commands varies from one pre-viewer/converter to another, so you might need to experiment to see if what you need is supported by the program(s) you intend to use. For example, `dvips(k)` as of version 5.92b converts all internal hyperlinks into page links pointing to a page containing the destination, so that “exact” linking to destinations is not possible (this was confirmed to be a bug and most probably has already been fixed in later versions of `dvips(k)`); `dvipdfm` as of version 0.13.2c and `dvipdfmx` as of version 20040411 do not correctly parse links to external local files, and produce a URL link instead of a file link.

5.4.2.1 Destination types for hypertex

xyz “Current position”. This is the default type.

Example: `\hldest{xyz}{-}{dest123}`

raw The destination specification (in the form of a HyperTeX `\special`) is taken from the command sequence `\cs`, where `cs` is the value of the `cmd` option. In the definition of `\cs`, use `\@hllabel` to refer to the hyperlink label. This option is intended to be used with `destgroups` (see [Section 5.5 \[Setting hyperlink types and options\]](#), page 55), as it does not make sense in a direct call to `\hldest`—you can just call the `raw` command.

Example:

```

\makeatletter
\def\mydest{\special{html:<a name="\@hllabel">}%
               \special{html:</a>}}
\resetatcatcode
\indent\hldest{raw}{cmd=mydest}{SpecialDest}
Special destination.

```

5.4.2.2 Destination options for hypertext

cmd Name of the macro (without the leading ‘\’) containing a HyperT_EX `\special` for the `raw` destination.

See [Section 5.4.2.1 \[Destination types for hypertext\]](#), page 47, the description of the `raw` destination, for an example.

5.4.2.3 Link types for hypertext

name Go to a “named destination”. The label is the destination name. All destinations in HyperT_EX are named destinations. This is the default type.

Example: `\hlstart{name}{}{dest123}Link to dest123\hlend`

url Go to a URL. The label is the URL.

Example:

```
\hlstart{url}{}{http://tug.org/eplain/}Eplain home\hlend
```

filename Go to a named destination in another file. The label is the destination name. The file name is specified by the `file` option. The file name extension can be specified separately by the `ext` option. The idea is to set the `ext` option globally at the beginning of the document to avoid hard-coding the extension together with the file name within each link—HyperT_EX is not restricted to any single output format, it can be DVI, PDF, possibly other formats.

Example:

```

\hlopts{ext=.pdf}
\hlstart{filename}{file=book}{dest123}
Link to dest123 in file ‘book.pdf’\hlend

```

raw The link specification (in the form of a HyperT_EX `\special`) is taken from the command sequence `\cs`, where `cs` is the value of the `cmd` option. In the definition of `\cs`, use `\@hllabel` to refer to the hyperlink label. Use the predefined command `\hlhash` to insert the `#` characters. This option is intended to be used with linkgroups (see [Section 5.5 \[Setting hyperlink types and options\]](#), page 55), as it does not make sense in a direct call to `\hlstart`—you can just call the `raw` command.

Example:

```

\makeatletter
\def\mylink{\special{html:<a href="\hlhash\@hllabel">}}
\resetatcatcode
\hlstart{raw}{cmd=mylink}{SpecialDest}
Link to the special destination.\hlend

```


5.4.2.4 Link options for `hypertex`

cmd	Name of the macro (without the leading ‘\’) containing a <code>HyperTeX \special</code> for the <code>raw</code> link. See Section 5.4.2.3 [Link types for hypertex], page 48 , the description of the <code>raw</code> link, for an example.
file	File name for the <code>filename</code> link type. See also the <code>ext</code> option. See Section 5.4.2.3 [Link types for hypertex], page 48 , the description of the <code>filename</code> link, for an example.
ext	File name extension for the <code>filename</code> link type. The idea is to set the <code>ext</code> option globally at the beginning of the document to avoid hard-coding the extension together with the file name within each link— <code>HyperTeX</code> is not restricted to any single output format, it can be DVI, PDF, possibly other formats. See Section 5.4.2.3 [Link types for hypertex], page 48 , the description of the <code>filename</code> link, for an example.

5.4.3 Hyperlink drivers `pdftex` and `dvipdfm`

This subsection describes link and destination types and options supported by the `pdftex` and `dvipdfm` drivers. Many of the hyperlink types and options are common to both drivers, so we describe them together.

5.4.3.1 Destination types for `pdftex` and `dvipdfm`

xyz	“Current position”. The option <code>zoom</code> specifies magnification to use (zero or empty means leave magnification unchanged, which is the default). This is the default type. For <code>dvipdfm</code> : the options <code>left</code> and <code>top</code> specify position coordinates to use (empty options mean current position coordinate, which is the default). Example: <code>\hldest{xyz}{zoom=2000}{dest123}</code>
fit	Fit the page to the window. Example: <code>\hldest{fit}{}{dest123}</code>
fith	Fit the width of the page to the window. For <code>dvipdfm</code> : the <code>top</code> option specifies vertical position (default is empty, meaning current position). Example: <code>\hldest{fith}{}{dest123}</code>
fitv	Fit the height of the page to the window. For <code>dvipdfm</code> : The option <code>left</code> specifies horizontal position (default is empty, meaning current position). Example: <code>\hldest{fitv}{}{dest123}</code>
fitb	Fit the page’s bounding box to the window. Example: <code>\hldest{fitb}{}{dest123}</code>

fitbh	<p>Fit the width of the page's bounding box to the window.</p> <p>For dvipdfm: the option top specifies vertical position (default is empty, meaning current position).</p> <p>Example: <code>\hldest{fitbh}{\dest123}</code></p>
fitbv	<p>Fit the height of the page's bounding box to the window.</p> <p>For dvipdfm: the option left specifies horizontal position (default is empty, meaning current position).</p> <p>Example: <code>\hldest{fitbv}{\dest123}</code></p>
fitr	<p>For pdftex: fit the rectangle specified by the options width, height and depth (as a T_EX rule specification) in the window. For dimensions set to empty, the corresponding value of the parent box is used (these are the defaults).</p> <p>For dvipdfm: fit the rectangle specified by the options left, bottom, right and top (in PostScript points, 72 points per inch) in the window. For dimensions set to empty, current position coordinate is substituted (these are the defaults).</p> <p>Example for pdftex:</p> <pre>\hldest{fitr}{width=\hsize, height=.5\vsize,depth=0pt}{dest123}</pre> <p>Example for dvipdfm:</p> <pre>\hldest{fitr}{left=72,bottom=72, right=720,top=360}{dest123}</pre>
raw	<p>The destination specification (in the form of a pdfT_EX command or a dvipdfm <code>\special</code>) is taken from the command sequence <code>\cs</code>, where <code>cs</code> is the value of the <code>cmd</code> option. In the definition of <code>\cs</code>, use <code>\@hllabel</code> to refer to the hyperlink label. This option is intended to be used with <code>destgroups</code> (see Section 5.5 [Setting hyperlink types and options], page 55), as it does not make sense in a direct call to <code>\hldest</code>—you can just call the <code>raw</code> command.</p> <p>Example for pdftex:</p> <pre>\makeatletter \def\mydest{\pdfdest name{\@hllabel} xyz} \resetatcatcode \hldesttype{raw} \hldestopts{cmd=mydest}</pre> <p>Example for dvipdfm:</p> <pre>\makeatletter \def\mydest{\special{pdf: dest (\@hllabel) [thispage /XYZ @xpos @ypos 0]}}</pre> <pre>\resetatcatcode \hldesttype{raw} \hldestopts{cmd=mydest}</pre>

5.4.3.2 Destination options for **pdftex** and **dvipdfm**

With respect to the destination options, the **pdftex** and **dvipdfm** differ in the way the fit rectangle is specified (relative coordinates for **pdftex**, absolute coordinates for **dvipdfm**).

Common destination options

cmd	Name of the macro (without the leading ‘\’) containing a pdf _T E _X command or a dvipdfm <code>\special</code> for the <code>raw</code> destination. See Section 5.4.3.1 [Destination types for pdftex and dvipdfm] , page 49, the description of the <code>raw</code> destination, for an example.
zoom	Magnification ratio times 1000 (like T _E X’s scale factor). Zero or empty means leave magnification unchanged, which is the default. Example: <code>\hldest{xyz}{zoom=2000}{dest123}</code>

pdftex-specific destination options

The dimension options below must be specified as a T_EX rule specification. When set to empty, the corresponding value of the parent box is used (this is the default for all dimension options).

depth	Depth of the fit rectangle for the <code>fitr</code> destination.
height	Height of the fit rectangle for the <code>fitr</code> destination.
width	Width of the fit rectangle for the <code>fitr</code> destination. Example:

```
\hldest{fitr}{width=\hsize,
               height=.5\vsiz,depth=0pt}{dest123}
```

dvipdfm-specific destination options

The dimension options below must be specified in PostScript points (72 points per inch), as a number without the ‘bp’ unit name. When set to empty, the current position coordinate is used (this is the default for all dimension options).

bottom	Bottom position coordinate of a box specification for the various destination types.
left	Left position coordinate of a box specification for the various destination types.
right	Right position coordinate of a box specification for the various destination types.
top	Top position coordinate of a box specification for the various destination types. Example:

```
\hldest{fitr}{left=72,bottom=72,
               right=720,top=360}{dest123}
```

5.4.3.3 Link types for pdftex and dvipdfm

Link types are the same for the pdf_TE_X and dvipdfm drivers, except that the pdf_TE_X driver provides one additional link type `num` (link to a numbered destination). dvipdfm does not support numbered destinations, therefore it does not have this link type. Note that all destinations created by Eplain hyperlink macros are named destinations; to define a numbered destination, you have to use low-level pdf_TE_X commands.

Common link types

name Go to a “named destination”. The label is the destination name. All destinations created with `\hldest` are named destinations (see [Section 5.2 \[Explicit hyperlinks\]](#), page 38). This is the default type.

Example: `\hlstart{name}{}{dest123}Link to dest123\hlend`

url Go to a URL. The label is the URL.

Example: `\hlstart{url}{}{http://tug.org/eplain/}Eplain home\hlend`

page Go to a page. The label is the page number (counting from 1). Page fitting is specified by the `pagefit` option.

Example:

```
\hlstart{page}{pagefit=/FitH 600}{123}
Link to page~123\hlend
```

filename Go to a named destination in another file. The label is the destination name. The file name is specified by the `file` option. Page fitting is specified by the `pagefit` option. The `newwin` option specifies whether the destination document is opened in the same window or in a new window.

Example:

```
\hlstart{filename}{file=book.pdf,newwin=1}{dest123}
Link to dest123 in file ‘book.pdf’\hlend
```

filepage Go to a page in another file. The label is the page number (counting from 1). The file name is specified by the `file` option. Page fitting is specified by the `pagefit` option. The `newwin` option specifies whether the destination document is opened in the same window or in a new window.

Example:

```
\hlstart{filepage}{file=book.pdf,newwin=,
pagefit=/FitR 50 100 300 500}{1}
Link to page~1 in file ‘book.pdf’\hlend
```

raw The link specification (in the form of a pdfT_EX command or a dvipdfm `\special` primitive) is taken from the command sequence `\cs`, where `cs` is the value of the `cmd` option. In the definition of `\cs`, use `\@hllabel` to refer to the hyperlink label. This option is intended to be used with linkgroups (see [Section 5.5 \[Setting hyperlink types and options\]](#), page 55), as it does not make sense in a direct call to `\hlstart`—you can just call the `raw` command.

Example for pdf_Tex:

```
% Redirect all \url links to the first page
\def\mycmd{\pdfstartlink goto page 1 {/Fit}}
\hltype[url]{raw}
\hlopts[url]{cmd=mycmd}
```

Example for dvipdfm:

```
% Redirect all \url links to the first page
\def\mycmd{\special{pdf: beginann <</Type/Annot /Subtype/Link
```

```

                                /Dest[0 /Fit]>>}}
\hltype[url]{raw}
\hlopts[url]{cmd=mycmd}

```

pdftex-specific link types

num Go to a “numbered destination”. The label is the destination number.
Example: `\hlstart{num}{{123}Link to 123\hlend`

5.4.3.4 Link options for pdftex and dvipdfm

Link options are mostly the same for the `pdftex` and `dvipdfm` drivers. The `pdftex` driver has additional options to specify link dimensions.

Common link options

bcolor Border color. An array of three numbers in the range 0 to 1, representing a color in DeviceRGB.
Example: `\hlstart{name}{bcolor=.1 .5 1}{dest123}Link\hlend`

bdash Array of numbers representing on and off stroke lengths for drawing dashes.
Example: `\hlstart{name}{bstyle=D,bdash=2 4}{dest123}Link\hlend`

bstyle Link border style:

- S** The border is drawn as a solid line.
- D** The border is drawn with a dashed line (the dash pattern is specified by the `bdash` option).
- B** The border is drawn in a beveled style.
- I** The border is drawn in an inset style.
- U** The border is drawn as a line on the bottom of the link rectangle.

The default is ‘S’.
Example: `\hlstart{name}{bstyle=D,bdash=2 4}{dest123}Link\hlend`

bwidth Border width in PostScript points (72 points per inch). The default is 1.
Example: `\hlstart{name}{bwidth=2}{dest123}Link\hlend`

cmd Name of the macro (without the leading ‘\’) containing a pdfTeX command or a dvipdfm `\special` for the `raw` link.
See [Section 5.4.3.3 \[Link types for pdftex and dvipdfm\], page 51](#), the description of the `raw` link, for an example.

file File name for the `filename` and `filepage` link types.
See [Section 5.4.3.3 \[Link types for pdftex and dvipdfm\], page 51](#), the descriptions of the `filename` and `filepage` links, for an example.

hlight Link border highlight modes:

- I** The rectangle specified by the bounding box of the link is inverted.

- N No highlighting is done.
- O The border of the link is inverted.
- P The region underneath the bounding box of the link is drawn inset into the page.

The default is ‘I’.

Example: `\hlstart{name}{bstyle=S,hlight=0}{dest123}Link\hlend`

newwin For the `filename` and `filepage` links, specifies whether the destination document is opened in the same window or in a new window. The settings are:

- 0 Open in the same window.
- non-0 Open in a new window.
- empty Behavior according to the viewer settings.

The default is empty.

See [Section 5.4.3.3 \[Link types for pdftex and dvipdfm\]](#), page 51, the descriptions of the `filename` and `filepage` links, for an example.

pagefit For the `page` and `filepage` links, specifies how the page must be fitted to the window. `pagefit` specification is written to the PDF file as is, so it must conform to the PDF standard.

See [Section 5.4.3.3 \[Link types for pdftex and dvipdfm\]](#), page 51, the descriptions of the `page` and `filepage` links, for an example.

pdftex-specific link options

The dimension options below must be specified as a T_EX rule specification. When set to empty, the corresponding value of the parent box is used (this is the default for all dimension options).

- depth** Depth of the link.
- height** Height of the link.
- width** Width of the link.

Example:

```
\hlstart{name}{width=5in,height=20pc,depth=0pt}{dest123}
Link\hlend
```

5.4.4 Hyperlink driver nolinks

Select this driver to suppress all hyperlinks in your document.

Selecting this driver is quite different from not selecting any driver at all, or from selecting some driver and then turning hyperlinks off for the entire document with `\hloff` and `\hldestoff` (see [Section 5.6 \[Turning hyperlinks on/off\]](#), page 57).

The purpose of `\hldestoff` and `\hloff` is to mark (parts) of your document where hyperlinks should never appear. (Imagine you want to prevent a cross-referencing macro from generating a link at a certain spot in your document.)

If instead you have prepared a document with hyperlinks and just want to compile a version without them, it is better to select the driver `nolinks`. This ensures that spacing and page-breaking are the same as what you were getting with hyperlinks enabled.

The reason for this is that hyperlinks are produced by the `\special` primitives or low-level hyperlink commands. Each such command is placed inside a *whatsit* (an internal `TeX` object), which may introduce legitimate breakpoints at places where none would exist without the *whatsits*. The macros `\hldestoff` and `\hloff` disable the hyperlink macros completely, so that no *whatsits* are produced.

In contrast, the `nolinks` driver does not completely disable hyperlink macros. Instead, it defines them to merely write to the log file (what gets written is unimportant). This also produces *whatsits*, thus imitating the *whatsits* from the hyperlink commands. (This trick was borrowed from the `LATEX` ‘color’ package.)

Another reason for using `nolinks` is that in horizontal mode `\hldest` places destinations inside boxes of zero width, height, and depth. When you say `\hldestoff`, `\hldest` will omit both destination definitions and these boxes. The missing boxes can again cause the typesetting to be inconsistent with that with destinations enabled. Here again, the `nolinks` driver helps by defining `\hldest` to produce the empty boxes.

So, if you are planning to produce versions of your PDF document both with and without hyperlinks, here is the recommended way to enable the hyperlinks under `pdfTeX`:

```
\ifpdf
  \enablehyperlinks
\else
  \enablehyperlinks[nolinks]%
\fi
```

5.5 Setting hyperlink types and options

You can define default types for links and destinations, which will be used when you do not specify a type in `\hlstart` or `\hldest`. Similarly, you can define default values for the options; the default value for an option is used when you do not set the option in the argument to `\hlstart` or `\hldest`.

The parameters for implicit links and destinations can be customized by setting the “group” types and options. When not set, the defaults are used.

All these settings are local to the current (`TeX`) group, so if you want to set an option temporarily, you can do so inside a `\begingroup... \endgroup` block; when the group ends, the previous settings are restored.

5.5.1 Setting default types and options

The default types for links and destinations can be set with the following commands:

```
\hltype{type}
\hldesttype{type}
```

where *type* is one of the link/destination types supported by the selected hyperlink driver (see [Section 5.4 \[Hyperlink drivers\]](#), page 45).

Default values for the options can be set with the following commands:

```
\hlopts{options}
\hldestopts{options}
```

where *options* is a comma-separated list of option assignments in the format ‘*option=value*’. Again, what options are allowed depends on the selected hyperlink driver.

Many people regard the default boxed links as not aesthetic and intruding on page layout. The reason why boxed links are the default is that the links are not colored until you load the L^AT_EX ‘color’ package (see [Section 4.23 \[Loading LaTeX packages\]](#), page 32) or use other means to define the `\color` command; therefore, not producing any kind of link border may result in the links not being marked in any way. However, when the links are actually colored, there is no need to produce the link boxes anymore; to avoid the boxes, you can set the default border width to zero (if the driver you use supports the link option `bwidth`; see [Section 5.4 \[Hyperlink drivers\]](#), page 45):

```
\hlopts{bwidth=0}
```

5.5.2 Setting group types

When called with an optional argument, as in

```
\hltype[groups]{type}
\hldesttype[groups]{type}
```

where *groups* is a comma-separated list of groups, `\hltype` and `\hldesttype` set the type for each group from *groups* to *type*. The default type is used for all groups with an empty type (this is the initial setting for all groups, except that the type for the ‘url’ linkgroup is set to ‘url’ by the drivers which support this link type).

There are two special “groups” which can be used inside the *groups* list. An empty group sets the default type. This allows to set the default type and group types in one command, for example:

```
\hltype[eq,]{type}
```

sets the link type for the ‘eq’ linkgroup and the default link type to *type*.

Another special group is a star (*) group, which signifies all defined groups. For example, the command

```
\hldesttype[*,]{type}
```

sets the destination type to *type* for each group, as well as the default destination type.

5.5.3 Setting group options

Option values for each group are stored as a list of option assignments. This list does not have to contain every supported option. Values for options missing from this list are taken from the default option values.

To manipulate the list of option values for the groups, you use the `\hlopts` and `\hldestopts` commands with an optional argument:

```
\hlopts[groups]{options}
\hldestopts[groups]{options}
\hlopts![groups]{options}
\hldestopts![groups]{options}
```


where *groups* is a comma-separated list of groups and *options* is a comma-separated list of option assignments. The two special “groups”, the empty group and the star (*) group, have the same meaning as for `\hltype` and `\hldesttype`. When used without the exclamation mark, `\hlopts` and `\hldestopts` preserve the current list of options for the groups, and only update the options listed in *options*. If you add the exclamation mark, the current list of options for each group in *groups* is discarded and the new list is set to *options*.

The “overriding” nature of the ‘!’ is appropriate when you give a complete specification of the options for a group, e.g., at the beginning of your document. On the other hand, when you want to adjust some option(s) and leave others intact, you should use the macros without the ‘!’.

For example, with displayed mathematical formulas, you often need to adjust the ‘raise’ option for the ‘eq’ destgroup, because the formulas often contain large parentheses and brackets. But when doing so, you want to leave the other settings unchanged. To achieve this, call `\hldestopts` without the ‘!’, for example:

```

 $\hldestopts[eq]{raise=2.5\normalbaselineskip}$ 
...
 $$ 

```

The display commands (`‘ $’$ ’`) implicitly put the entire formula inside a (T_EX) group (`\begingroup... \endgroup`), so you do not need to isolate the setting of the ‘raise’ option—it will be restored after the closing `‘ $’$ ’`.

Initially, Eplain sets the option lists for almost all groups to empty, so that the groups fall back on the default values for all options. The one exception to this rule is the ‘eq’ destgroup, whose initial option list contains one setting:

```
raise=1.7\normalbaselineskip
```

This setting usually accommodates the large operators, which often appear in displayed math.

5.6 Turning hyperlinks on/off

Links and/or destinations can be turned on or off globally by disabling the low-level commands, or for each group individually.

All these settings are local to the current (T_EX) group, so if you want to enable or disable links/destinations temporarily, you can do so inside a `\begingroup... \endgroup` block; when the group ends, the previous settings are restored.

5.6.1 Turning low-level commands on/off

The low-level commands `\hlstart`, `\hlend` and `\hldest` can be turned on/off with the following commands:

```

\hldeston
\hldestoff
\hlon
\hloff

```

See [Section 5.4.4 \[Hyperlink driver nolinks\]](#), page 54, for the implications of using these commands to disable hyperlinks for the entire document.

5.6.2 Turning hyperlinks on/off for a group

If you want to disable links/destinations produced by certain groups, you can give a list of the groups as an optional argument to these commands:

```
\hldeston[groups]  
\hldestoff[groups]  
\hlon[groups]  
\hloff[groups]
```

where *groups* is the list of linkgroups/destgroups. This list can contain two special groups. The empty group switches the low-level commands (see [Section 5.6.1 \[Turning low-level commands on/off\], page 57](#)), and the star (*) group operates on all defined groups.

Note that turning off the low-level commands disables all hyperlinks globally, including groups which have them enabled. Turning off certain linkgroups/destgroups records the fact that the macros in the group should not produce links/destinations. To illustrate the distinction, assume that all links are on; after the following sequence of commands:

```
\hloff  
\hloff[eq]  
\hlon
```

all links are on except for the ‘eq’ linkgroup.


6 Arrow theoretic diagrams

This chapter describes definitions for producing commutative diagrams.

Steven Smith wrote this documentation (and the macros).

6.1 Slanted lines and vectors

The macros `\drawline` and `\drawvector` provide the capability found in L^AT_EX's `picture` mode to draw slanted lines and vectors of certain directions. Both of these macros take three arguments: two integer arguments to specify the direction of the line or vector, and one argument to specify its length. For example, `'\drawvector(-4,1){60pt}'` produces the vector



which lies in the 2d quadrant, has a slope of minus $1/4$, and a width of 60 pt.

Note that if an `\hbox` is placed around `\drawline` or `\drawvector`, then the width of the `\hbox` will be the positive dimension specified in the third argument, except when a vertical line or vector is specified, e.g., `\drawline(0,1){1in}`, which has zero width. If the specified direction lies in the 1st or 2d quadrant (e.g., $(1,1)$ or $(-2,3)$), then the `\hbox` will have positive height and zero depth. Conversely, if the specified direction lies in the 3d or 4th quadrant (e.g., $(-1,-1)$ or $(2,-3)$), then the `\hbox` will have positive depth and zero height.

There are a finite number of directions that can be specified. For `\drawline`, the absolute value of each integer defining the direction must be less than or equal to six, i.e., $(7,-1)$ is incorrect, but $(6,-1)$ is acceptable. For `\drawvector`, the absolute value of each integer must be less than or equal to four. Furthermore, the two integers cannot have common divisors; therefore, if a line with slope 2 is desired, say $(2,1)$ instead of $(4,2)$. Also, specify $(1,0)$ instead of, say, $(3,0)$ for horizontal lines and likewise for vertical lines.

Finally, these macros depend upon the L^AT_EX font `line10`. If your site doesn't have this font, ask your system administrator to get it. Future enhancements will include macros to draw dotted lines and dotted vectors of various directions.

6.2 Commutative diagrams

The primitive commands `\drawline` and `\drawvector` can be used to typeset arrow theoretic diagrams. This section describes (1) macros to facilitate typesetting arrows and morphisms, and (2) macros to facilitate the construction of commutative diagrams. All macros described in this section must be used in math mode.

6.2.1 Arrows and morphisms

The macros `\mapright` and `\mapleft` produce right and left pointing arrows, respectively. Use superscript (`^`) to place a morphism above the arrow, e.g., `'\mapright^{\alpha}'`; use subscript (`_`) to place a morphism below the arrow, e.g., `'\mapright_{\tilde{1}}'`. Superscripts and subscripts may be used simultaneously, e.g., `'\mapright^{\pi}_{\rm epimor.}'`.

Similarly, the macros `\mapup` and `\mapdown` produce up and down pointing arrows, respectively. Use `\rt` to place a morphism to the right of the arrow, e.g., `'\mapup\rt{\rm`

id}'; use `\lft` to place a morphism to the left of the arrow, e.g., '`\mapup\lft\omega`'. `\lft` and `\rt` may be used simultaneously, e.g., '`\mapdown\lft\pi\rt{\rm monomor.}`'.

Slanted arrows are produced by the macro `\arrow`, which takes a direction argument (e.g., '`\arrow(3,-4)`'). Use `\rt` and `\lft` to place morphisms to the right and left, respectively, of the arrow. A slanted line (no arrowhead) is produced with the macro `\sline`, whose syntax is identical to that of `\arrow`.

The length of these macros is predefined by the default T_EX dimensions `\harrowlength`, for horizontal arrows (or lines), `\varrowlength`, for vertical arrows (or lines), and `\sarrowlength`, for slanted arrows (or lines). To change any of these dimensions, say, e.g., '`\harrowlength=40pt`'. As with all other T_EX dimensions, the change may be as global or as local as you like. Furthermore, the placement of morphisms on the arrows is controlled by the dimensions `\hmorphposn`, `\vmorphposn`, and `\morphdist`. The first two dimensions control the horizontal and vertical position of the morphism from its default position; the latter dimension controls the distance of the morphism from the arrow. If you have more than one morphism per arrow (i.e., a `~/_` or `\lft/\rt` construction), use the parameters `\hmorphposnup`, `\hmorphposndn`, `\vmorphposnup`, `\vmorphposndn`, `\hmorphposnrt`, `\hmorphposnlft`, `\vmorphposnrt`, and `\vmorphposnlft`. The default values of all these dimensions are provided in the section on parameters that follows below.

There is a family of macros to produce horizontal lines, arrows, and adjoint arrows. The following macros produce horizontal maps and have the same syntax as `\mapright`:

```
\mapright
      $X\mapright Y$  $\equiv X \longrightarrow Y$ .
\mapleft  $X\mapleft Y$  $\equiv X \longleftarrow Y$ .
\hline    $X\hline Y$  $\equiv X \longrightarrow Y$ .
\bimapright
      $X\bimapright Y$  $\equiv X \Longrightarrow Y$ .
\bimapleft
      $X\bimapleft Y$  $\equiv X \Longleftarrow Y$ .
\adjmapright
      $X\adjmapright Y$  $\equiv X \rightleftarrows Y$ .
\adjmapleft
      $X\adjmapleft Y$  $\equiv X \rightleftarrows Y$ .
\bihline  $X\bihline Y$  $\equiv X \equiv Y$ .
```

There is also a family of macros to produce vertical lines, arrows, and adjoint arrows. The following macros produce vertical maps and have the same syntax as `\mapdown`:

```
\mapdown  (a down arrow)
\mapup     (an up arrow)
\vline     (vertical line)
\bimapdown
      (two down arrows)
```

`\bimapup` (two up arrows)
`\adjmapdown`
 (two adjoint arrows; down then up)
`\adjmapup`
 (two adjoint arrows; up then down)
`\bivline` (two vertical lines)

Finally, there is a family of macros to produce slanted lines, arrows, and adjoint arrows. The following macros produce slanted maps and have the same syntax as `\arrow`:

`\arrow` (a slanted arrow)
`\sline` (a slanted line)
`\biarrow` (two straight arrows)
`\adjarrow`
 (two adjoint arrows)
`\bisline` (two straight lines)

The width between double arrows is controlled by the parameter `\channelwidth`. The parameters `\hchannel` and `\vchannel`, if nonzero, override `\channelwidth` by controlling the horizontal and vertical shifting from the first arrow to the second.

There are no adornments on these arrows to distinguish inclusions from epimorphisms from monomorphisms. Many texts, such as Lang's book *Algebra*, use as a tasteful alternative the symbol 'inc' (in roman) next to an arrow to denote inclusion.

Future enhancements will include a mechanism to draw curved arrows found in, e.g., the Snake Lemma, by employing a version of the `\path` macros of Appendix D of *The T_EXbook*.

6.2.2 Construction of commutative diagrams

There are two approaches to the construction of commutative diagrams described here. The first approach, and the simplest, treats commutative diagrams like fancy matrices, as Knuth does in Exercise 18.46 of *The T_EXbook*. This case is covered by the macro `\commdiag`, which is an altered version of the Plain T_EX macro `\matrix`. An example suffices to demonstrate this macro. The following commutative diagram (illustrating the covering homotopy property; Bott and Tu, *Differential Forms in Algebraic Topology*)

$$\begin{array}{ccc}
 Y & \xrightarrow{f} & E \\
 \downarrow & \nearrow f_t & \downarrow \\
 Y \times I & \xrightarrow{\bar{f}_t} & X
 \end{array}$$

is produced with the code

```

$$\commdiag{Y&\mapright^fE\cr \mapdown&\arrow(3,2)\lft{f_t}&\mapdown\cr
Y\times I&\mapright^{\bar f_t}X}$$

```

Of course, the parameters may be changed to produce a different effect. The following commutative diagram (illustrating the universal mapping property; Warner, *Foundations of Differentiable Manifolds and Lie Groups*)

$$\begin{array}{ccc}
 V \otimes W & & \\
 \uparrow \phi & \searrow \tilde{l} & \\
 V \times W & \xrightarrow{l} & U
 \end{array}$$

is produced with the code

```

 $\varrowlength=20pt$ 
 $\commdiag{V \otimes W \cr \mapup\left\{\phi\right\}\rt{\tilde{l}}\cr V \times W \cr \mapright{l}U}$ 

```

A diagram containing isosceles triangles is achieved by placing the apex of the triangle in the center column, as shown in the example (illustrating all constant minimal realizations of a linear system; Brockett, *Finite Dimensional Linear Systems*)

$$\begin{array}{ccccc}
 & & R^m & & \\
 & \swarrow B & & \searrow G & \\
 R^n & \xrightarrow{P} & R^n & & R^n \\
 \downarrow e^{A_t} & & & & \downarrow e^{F_t} \\
 R^n & \xrightarrow{P} & R^n & & R^n \\
 & \swarrow C & & \searrow H & \\
 & & R^q & &
 \end{array}$$

which is produced with the code

```

 $\sarrowlength=.42\harrowlength$ 
 $\commdiag{R^m \cr \leftarrow B \quad \rightarrow G \cr R^n \cr \mapright{P} R^n \cr \mapdown{e^{A_t}} \quad \mapdown{e^{F_t}} \cr R^n \cr \rightarrow C \quad \leftarrow H \cr R^q}$ 

```

Other commutative diagram examples appear in the file `commdiags.tex`, which is distributed with this package.

In these examples the arrow lengths and line slopes were carefully chosen to blend with each other. In the first example, the default settings for the arrow lengths are used, but a direction for the arrow must be chosen. The ratio of the default horizontal and vertical arrow lengths is approximately the golden mean $\gamma = 1.618\dots$; the arrow direction closest to this mean is (3,2). In the second example, a slope of $-1/3$ is desired and the default horizontal arrow length is 60 pt; therefore, choose a vertical arrow length of 20 pt. You may affect the interline glue settings of `\commdiag` by redefining the macro `\commdiagbaselines`. (cf. Exercise 18.46 of *The T_EXbook* and the section on parameters below.)

The width, height, and depth of all morphisms are hidden so that the morphisms' size do not affect arrow positions. This can cause a large morphism at the top or bottom of

a diagram to impinge upon the text surrounding the diagram. To overcome this problem, use \TeX 's `\noalign` primitive to insert a `\vskip` immediately above or below the offending line, e.g., `'\$\commdiag{\noalign{\vskip6pt}}X\mapright^{\int&Y}\cr \dots'`.


The macro `\commdiag` is too simple to be used for more complicated diagrams, which may have intersecting or overlapping arrows. A second approach, borrowed from Francis Borceux's *Diagram* macros for \LaTeX , treats the commutative diagram like a grid of identically shaped boxes. To compose the commutative diagram, first draw an equally spaced grid, e.g.,

```

. . . . .
. . . . .
. . . . .
. . . . .

```

on a piece of scratch paper. Then draw each element (vertices and arrows) of the commutative diagram on this grid, centered at each grid point. Finally, use the macro `\gridcommdiag` to implement your design as a \TeX alignment. For example, the cubic diagram



that appears in Francis Borceux's documentation can be implemented on a 7 by 7 grid, and is achieved with the code


```

\harrowlength=48pt \varrowlength=48pt \sarowlength=20pt
\def\cross#1#2{\setbox0=\hbox{#1$}%
\hbox to\wd0{\hss\hbox{#2$}\hss}\llap{\unhbox0}}
\gridcommdiag{&&B&&\mapright^b&&D\cr
&\arrow(1,1)\lft a&&&\arrow(1,1)\lft d\cr
A&&\cross{\hmorphposn=12pt\mapright^c}{\vmorphposn=-12pt\mapdown\lft f}
&&C&&\mapdown\rt h\cr\cr
\mapdown\lft e&&F&&\cross{\hmorphposn=-12pt\mapright_j}
{\vmorphposn=12pt\mapdown\rt g}&&H\cr
&\arrow(1,1)\lft i&&&\arrow(1,1)\rt l\cr
E&&\mapright_k&&G\cr}

```

The dimensions `\hgrid` and `\vgrid` control the horizontal and vertical spacing of the grid used by `\gridcommdiag`. The default setting for both of these dimensions is 15 pt. Note that in the example of the cube the arrow lengths must be adjusted so that the arrows overlap into neighboring boxes by the desired amount. Hence, the `\gridcommdiag` method, albeit more powerful, is less automatic than the simpler `\commdiag` method. Furthermore, the ad hoc macro `\cross` is introduced to allow the effect of overlapping arrows. Finally, note that the positions of four of the morphisms are adjusted by setting `\hmorphposn` and `\vmorphposn`.

One is not restricted to a square grid. For example, the proof of Zassenhaus's Butterfly Lemma can be illustrated by the diagram (appearing in Lang's book *Algebra*)

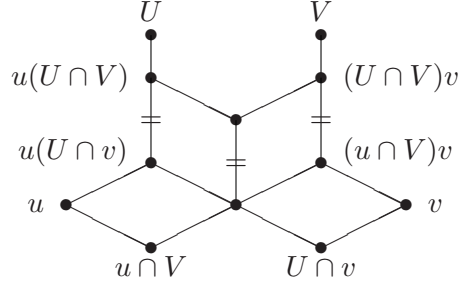

This diagram may be implemented on a 9 by 12 grid with an aspect ratio of 1/2, and is set with the code

```

 $\hgrid=16pt \vgrid=8pt \sarrowlength=32pt$ 
 $\def\cross#1#2{\setbox0=\hbox{#1$}%$ 
 $\hbox to\wd0{\hss\hbox{#2$}\hss}\llap{\unhbox0}$ 
 $\def\l#1{\llap{#1$\hspace{.5em}}}$ 
 $\def\r#1{\rlap{\hspace{.5em}#1$}}$ 
 $\gridcommdiag{\&\&U\&\&\&V\cr \&\&\bullet\&\&\&\bullet\cr$ 
 $\&\&\sarrowlength=16pt\sline(0,1)\&\&\&\sarrowlength=16pt\sline(0,1)\cr$ 
 $\&\&\l{u(U\cap V)}\bullet\&\&\&\bullet\r{(U\cap V)v}\cr$ 
 $\&\&\sline(2,-1)\&\&\sline(2,1)\cr$ 
 $\&\&\cross{=}{\sline(0,1)}\&\&\bullet\&\&\cross{=}{\sline(0,1)}\cr\cr$ 
 $\&\&\l{\textstyle u(U\cap v)}\bullet\&\&\cross{=}{\sline(0,1)}\&\&$ 
 $\bullet\r{\textstyle (u\cap V)v}\cr$ 
 $\&\&\sline(2,1)\&\&\sline(2,-1)\&\&\sline(2,1)\&\&\sline(2,-1)\cr$ 
 $\l{u}\bullet\&\&\&\bullet\&\&\&\bullet\r{v}\cr$ 
 $\&\&\sline(2,-1)\&\&\sline(2,1)\&\&\sline(2,-1)\&\&\sline(2,1)\cr$ 
 $\&\&\bullet\&\&\&\bullet\cr \&\&u\cap V\&\&\&U\cap v\cr}$ 

```

Again, the construction of this diagram requires careful choices for the arrow lengths and is facilitated by the introduction of the ad hoc macros `\cross`, `\r`, and `\l`. Note also that superscripts were used to adjust the position of the vertices $u(U \cap v)$ and $(u \cap V)v$. Many diagrams may be typeset with the predefined macros that appear here; however, ingenuity is often required to handle special cases.

6.2.3 Commutative diagram parameters

The following is a list describing the parameters used in the commutative diagram macros. These dimensions may be changed globally or locally.

`\harrowlength`

(Default: 60 pt) The length of right or left arrows.

`\varrowlength`

(Default: 0.618`\harrowlength`) The length of up or down arrows.

`\sarrowlength`

(Default: 60 pt) The horizontal length of slanted arrows.

`\hmorphposn`

(Default: 0 pt) The horizontal position of the morphism with respect to its default position. There are also the dimensions `\hmorphposnup`, `\hmorphposndn`, `\hmorphposnrt`, and `\hmorphposnlft` for `^/_` or `\lft/\rt` constructions.

`\vmorphposn`

(Default: 0 pt) The vertical position of the morphism with respect to its default position. There are also the dimensions `\vmorphposnup`, `\vmorphposndn`, `\vmorphposnrt`, and `\vmorphposnlft` for `^/_` or `\lft/\rt` constructions.

`\morphdist`

(Default: 4 pt) The distance of morphisms from slanted lines or arrows.

`\channelwidth`

(Default: 3 pt) The distance between double lines or arrows.

`\hchannel`, `\vchannel`

(Defaults: 0 pt) Overrides `\channelwidth`. The horizontal and vertical shifts between double lines or arrows.

`\commdiagbaselines`

(Default: `\baselineskip=15pt \lineskip=3pt \lineskiplimit=3pt`) The parameters used by `\commdiag` for setting interline glue.

`\hgrid`

(Default: 15 pt) The horizontal spacing of the grid used by `\gridcommdiag`.

`\vgrid`

(Default: 15 pt) The vertical spacing of the grid used by `\gridcommdiag`.

7 Programming definitions

The definitions in this section are only likely to be useful when you are writing nontrivial macros, not when writing a document.

7.1 Category codes

Plain T_EX defines `\active` (as the number 13) for use in changing category codes. Although the author of *The T_EXbook* has “intentionally kept the category codes numeric”, two other categories are commonly used: letters (category code 11) and others (12). Therefore, Eplain defines `\letter` and `\other`.

Sometimes it is cleaner to make a character active without actually writing a `\catcode` command. The `\makeactive` command takes a character as an argument to make active (and ignores following spaces). For example, here are two commands which both make `\` active:

```
\makeactive\ \makeactive92
```

Sometimes you might want to temporarily change the category code of the ‘@’ character to `\letter`, so that you can use or define macros which are normally inaccessible to the user. For such situations, Eplain provides the `\makeatletter` command. It sets the category code of ‘@’ to `\letter` (11) and defines `\resetatcatcode` to restore the category code to whatever it was before the call to `\makeatletter`. For example:

```
\makeatletter
\def\@hidden@macro{This macro cannot normally be
                    called / redefined by the user}
\resetatcatcode
```

There is also `\makeatother` which works similarly but sets the category code of ‘@’ to `\other` (12).

Usually, when you give a definition to an active character, you have to do so inside a group where you temporarily make the character active, and then give it a global definition (cf. the definition of `\obeyspaces` in *The T_EXbook*). This is inconvenient if you are writing a long macro, or if the character already has a global definition you do not wish to transcend. Eplain provides `\letreturn`, which defines the usual end-of-line character to be the argument. For example:

```
\def\mymacro{... \letreturn\myreturn ... }
\mymacro hello
there
```

The end-of-line between ‘hello’ and ‘there’ causes `\myreturn` to be expanded.

The T_EXbook describes `\uncatcodespecials`, which makes all characters which are normally “special” into “other” characters, but the definition never made it into plain T_EX. Eplain therefore defines it.

Finally, `\percentchar` expands into a literal ‘%’ character. This is useful when you `\write` T_EX output to a file, and want to avoid spurious spaces. For example, Eplain writes a `\percentchar` after the definition of cross-references. The macros `\lbracechar` and `\rbracechar` expand similarly.

7.2 Allocation macros

Plain T_EX provides macros that allocate registers of each primitive type in T_EX, to prevent different sets of macros from using the same register for two different things. The macros are all named starting with ‘new’, e.g., `\newcount` allocates a new “count” (integer) register. Such allocations are usually needed only at the top level of some macro definition file; therefore, plain T_EX makes the allocation registers `\outer`, to help find errors. (The error this helps to find is a missing right brace in some macro definition.)

Sometimes, however, it is useful to allocate a register as part of some macro. An outer control sequence cannot be used as part of a macro definition (or in a few other contexts: the parameter text of a definition, an argument to a definition, the preamble of an alignment, or in conditional text that is being skipped). Therefore, Eplain defines “inner” versions of all the allocation macros, named with the prefix ‘inner’: `\innernewbox`, `\innernewcount`, `\innernewdimen`, `\innernewfam`, `\innernewhelp`, `\innernewif`, `\innernewinsert`, `\innernewlanguage`, `\innernewread`, `\innernewskip`, `\innernewtoks`, `\innernewwrite`.

You can also define non-outer versions of other macros in the same way that Eplain defines the above. The basic macro is called `\innerdef`:

```
\innerdef \innername {outhernname}
```

The first argument (`\innername`) to `\innerdef` is the control sequence that you want to define. Any previous definition of `\innername` is replaced. The second argument (`outhernname`) is the *characters* in the name of the outer control sequence. (You can’t use the actual control sequence name, since it’s outer!)

If the outer control sequence is named `\cs`, and you want to define `innercs` as the inner one, you can use `\innerinnerdef`, which is just an abbreviation for a call to `\innerdef`. For example, these two calls are equivalent:

```
\innerdef\innerproclaim{proclaim}
\innerinnerdef{proclaim}
```

7.3 Iteration

You can iterate through a comma-separated list of items with `\for`. Here is an example:

```
\for\name:=karl,kathy\do{%
  \message{\name}%
}%
```

This writes ‘karl’ and ‘kathy’ to the terminal. Spaces before or after the commas in the list, or after the `:=`, are *not* ignored. To strip leading spaces off the items, use `\For`:

```
\For\name:=
  karl,
  kathy\do{%
    \message{\name}%
  }%
```

Note that trailing spaces are still *not* ignored.

Both `\for` and `\For` expand the first token of the item list fully, so this is equivalent to the above:

```
\def\namelist{karl,kathy}%
\for\name:=\namelist\do ...
```

However, this won't work, either with `\for` or with `\For`:

```
\def\namelist{karl,kathy}%
\For\name:= \namelist\do ...
```

because `\for` and `\For` expand the first token after `:=` which is space, not `\namelist`.

Eplain provides another kind of loops, which is an extension of plain T_EX's `\loop`. If you say:

```
\loop
  loop-text
\if condition
  if-text
\repeat
```

then *loop-text* will be repeated as long as *condition* is satisfied (`\if` can be any of the T_EX's conditional commands, without the matching `\fi`). Eplain extends this with the optional *else* clause:

```
\loop
  loop-text
\if condition
  if-text
\else
  else-text
\repeat
```

Here, *loop-text* will be repeated as long as *condition* is *not* satisfied. This extension is from Victor Eijkhout's *T_EX by Topic* (page 104).

7.4 Macro arguments

It is occasionally useful to redefine a macro that takes arguments to do nothing. Eplain defines `\gobble`, `\gobbletwo`, and `\gobblethree` to swallow one, two, and three arguments, respectively.

For example, if you want to produce a “short” table of contents—one that includes only chapters, say—the easiest thing to do is read the entire `.toc` file (see [Section 4.8 \[Contents\]](#), [page 12](#)), and just ignore the commands that produce section or subsection entries. To be specific:

```
\let\tocchapterentry = \shorttocchapter
\let\tocsectionentry = \gobbletwo
\let\tocsubsectionentry = \gobbletwo
\readtocfile
```

(Of course, this assumes you only have chapters, sections, and subsections in your document.)

In addition, Eplain defines `\eattoken` to swallow the single following token, using `\let`. Thus, `\gobble` followed by `{...}` ignores the entire brace-enclosed text. `\eattoken` followed by the same ignores only the opening left brace.

Eplain defines a macro `\identity` which takes one argument and expands to that argument. This may be useful if you want to provide a function for the user to redefine, but don't need to do anything by default. (For example, the default definition of `\eqconstruct` (see [Section 4.11.1 \[Formatting equation references\]](#), page 16) is `\identity`.)

You may also want to read an optional argument. The established convention is that optional arguments are put in square brackets, so that is the syntax Eplain recognizes. Eplain ignores space tokens before an optional argument, via `\futurenonspaclet`.

You test for an optional argument by using `\@getoptionalarg`. It takes one argument, a control sequence to expand after reading the argument, if present. If an optional argument is present, the control sequence `\@optionalarg` expands to it; otherwise, `\@optionalarg` is `\empty`. You must therefore have the category code of `@` set to 11 (letter). Here is an example:

```
\catcode'\@=\letter
\def\cmd{\@getoptionalarg\finishcmd}
\def\finishcmd{%
  \ifx\@optionalarg\empty
    % No optional argument present.
  \else
    % One was present.
  \fi
}
```

If an optional argument contains another optional argument, the inner one will need to be enclosed in braces, so T_EX does not mistake the end of the first for the end of the second.

7.5 Converting to characters

Eplain defines `\xrlabel` to produce control sequence names for cross-reference labels, et al. This macro expands to its argument with an `'_'` appended. (It does this because the usual use of `\xrlabel` is to generate a control sequence name, and we naturally want to avoid conflicts between control sequence names.)

Because `\xrlabel` is fully expandable, to make a control sequence name out of the result you need only do

```
\csname \xrlabel{label}\endcsname
```

The `\csname` primitive makes a control sequence name out of any sequence of character tokens, regardless of category code. Labels can therefore include any characters except for `'\'`, `'{'`, `'}'`, and `'#'`, all of which are used in macro definitions themselves.

`\sanitize` takes a control sequence as an argument and converts the expansion of the control sequence into a list of character tokens. This is the behavior you want when writing information like chapter titles to an output file. For example, here is part of the definition of `\writenumberedtocentry`; `#2` is the title that the user has given.

```
...
\def\temp{#2}%
...
\write\tocfile{%
  ...
```

```

\sanitize\temp
...
}%

```

7.6 Expansion

This section describes some miscellaneous macros for expansion, etc.

7.6.1 `\csn` and `\ece`

`\csn{name}` simply abbreviates `\csname name \endcsname`, thus saving some typing. The extra level of expansion does take some time, though, so I don't recommend it for an inner loop.

`\ece{token}{name}` abbreviates

```
\expandafter token \csname name \endcsname
```

For example,

```

\def\fontabbrevdef#1#2{\ece\def{@#1font}{#2}}
\fontabbrevdef{normal}{ptmr}

```

defines a control sequence `\@normalfont` to expand to `ptmr`.

7.6.2 `\edefappend`

`\edefappend` is a way of adding on to an existing definition. It takes two arguments: the first is the control sequence name, the second the new tokens to append to the definition. The second argument is fully expanded (in the `\edef` that redefines the control sequence).

For example:

```

\def\foo{abc}
\def\bar{xyz}
\edefappend\foo{\bar karl}

```

results in `\foo` being defined as `'abcxyzkarl'`.

7.6.3 Hooks

A *hook* is simply a name for a group of actions which is executed in certain places—presumably when it is most useful to allow customization or modification. T_EX already provides many builtin hooks; for example, the `\every ...` token lists are all examples of hooks.

Eplain provides several macros for adding actions to hooks. They all take two arguments: the name of the hook and the new actions.

`hookaction name actions`

`hookappend name actions`

`hookprepend name actions`

Each of these adds *actions* to the hook *name*. (Any previously-defined actions are retained.) *name* is not a control sequence, but rather the characters of the name.

`hookactiononce name \cs`

`\hookactiononce` adds *cs* to *name*, like the macros above, but first it adds

```
\global\let \cs \relax
```

to the definition of `\cs`. (This implies `\cs` must be a true expandable macro, not a control sequence `\let` to a primitive or some other such thing.) Thus, `\cs` is expanded the next time the hook *name* is run, but it will disappear after that.

The `\global` is useful because `\hookactiononce` is most useful when the grouping structure of the \TeX code could be anything. Neither this nor the other hook macros do global assignments to the hook variable itself, so \TeX 's usual grouping rules apply.

The companion macro to defining hook actions is `\hookrun`, for running them. This takes a single argument, the name of the hook. If no actions for the hook are defined, no error ensues.

Here is a skeleton of general `\begin` and `\end` macros that run hooks, and a couple of calls to define actions. The use of `\hookprepend` for the begin action and `\hookappend` for the end action ensures that the actions are executed in proper sequence with other actions (as long as the other actions use `\hookprepend` and `\hookappend` also).

```
\def\begin#1{ ... \hookrun{begin} ... }
\def\end#1{ ... \hookrun{end} ... }
\hookprepend{begin}\start_underline
\hookappend{end}\finish_underline
```

7.6.4 Properties

A *property* is a name/value pair associated with another symbol, traditionally called an *atom*. Both atom and property names are control sequence names.

Eplain provides two macros for dealing with property lists: `\setproperty` and `\getproperty`.

```
\setproperty atom propname value
```

`\setproperty` defines the property *property* on the atom *atom* to be *value*. *atom* and *propname* can be anything acceptable to `\csname`. *value* can be anything.

```
\getproperty atom propname
```

`\getproperty` expands to the value stored for *propname* on *atom*. If *propname* is undefined, it expands to nothing (i.e., `\empty`).

The idea of properties originated in Lisp (I believe). There, the implementation truly does associate properties with atoms. In \TeX , where we have no builtin support for properties, the association is only conceptual.

The following example typesets ‘xyz’.

```
\setproperty{a}{pr}{xyz}
\getproperty{a}{pr}
```

7.6.5 \expandonce

`\expandonce` is defined as `\expandafter\noexpand`. Thus, `\expandonce token` expands *token* once, instead of to \TeX primitives. This is most useful in an `\edef`.

For example, the following defines `\temp` to be `\foo`, not ‘abc’.

```

\def\foo{abc}
\def\bar{\foo}
\edef\temp{\expandonce\bar}

```

7.6.6 \ifundefined

`\ifundefined{cs} t \else f \fi` expands the *t* text if the control sequence `\cs` is undefined or has been `\let` to `\relax`, and the *f* text otherwise.

Since `\ifundefined` is not a primitive conditional, it cannot be used in places where T_EX might skip tokens “at high speed”, e.g., within another conditional—T_EX can’t match up the `\if`’s and `\fi`’s.

This macro was taken directly from *The T_EXbook*, page 308.

7.6.7 \ifempty

`\ifempty{arg} t \else f \fi` expands the *t* text if *arg* is the empty string, and the *f* text otherwise. This macro is useful when you need to test for empty arguments to your macros, for example:

```
\def\foo#1{\ifempty{#1} t \else f \fi}
```

Since `\ifempty` is not a primitive conditional, it cannot be used in places where T_EX might skip tokens “at high speed”, e.g., within another conditional—T_EX can’t match up the `\if`’s and `\fi`’s.

Note that the following code

```

\def\empty{}
\ifempty\empty\message{empty}\else\message{not empty}\fi

```

will produce the message ‘not empty’.

7.6.8 \ifinteger and \isinteger

`\ifinteger{arg} t \else f \fi` expands the *t* text if *arg* is an integer, and the *f* text otherwise. This macro can detect positive and negative integers.

Since `\ifinteger` is not a primitive conditional, it cannot be used in places where T_EX might skip tokens “at high speed”, e.g., within another conditional—T_EX can’t match up the `\if`’s and `\fi`’s. For such situations Eplain provides `\isinteger`, which can be used as follows:

```
\if\isinteger{arg} t \else f \fi
```

Although `\ifinteger` and `\isinteger` work well with regular input, they are not bullet-proof. For example, the following code

```
\ifinteger{12_ab}integer\else not integer\fi
```

will expand to ‘ab_integer’ (and thus would not even compile outside math mode).

These macros come from T_EX Frequently Asked Question (<http://www.tex.ac.uk/cgi-bin/texfaq2html>).

7.6.9 \futurenonspaclet

The `\futurelet` primitive allows you to look at the next token from the input. Sometimes, though, you want to look ahead ignoring any spaces. This is what `\futurenonspaclet`

does. It is otherwise the same as `\futurelet`: you give it two control sequences as arguments, and it assigns the next nonspace token to the first, and then expands the second. For example:

```
\futurenonSPACElet\temp\finishup
\def\finishup{\ifx\temp ...}
```

7.7 Obeying spaces

`\obeywhitespace` makes both end-of-lines and space characters in the input be respected in the output. Unlike plain T_EX’s `\obeyspaces`, even spaces at the beginnings of lines turn into blank space.

By default, the size of the space that is produced by a space character is the natural space of the current font, i.e., what `\` produces.

Ordinarily, a blank line in the input produces as much blank vertical space as a line of text would occupy. You can adjust this by assigning to the parameter `\blanklineskipamount`: if you set this negative, the space produced by a blank line will be smaller; if positive, larger.

Tabs are not affected by this routine. In particular, if tabs occur at the beginning of a line, they will disappear. (If you are trying to make T_EX do the “right thing” with tabs, don’t. Use a utility program like *expand* instead.)

7.8 Writing out numbers

`\numbername` produces the written-out form of its argument, i.e., ‘zero’ through ‘ten’ for the numbers 0–10, and numerals for all others.

7.9 Mode-specific penalties

T_EX’s built-in `\penalty` command simply appends to the current list, no matter what kind of list it is. You might intend a particular penalty to always be a “vertical” penalty, however, i.e., appended to a vertical list. Therefore, Eplain provides `\vpenalty` and `\hpenalty` which first leave the other mode and then do `\penalty`.

More precisely, `\vpenalty` inserts `\par` if the current mode is horizontal, and `\hpenalty` inserts `\leavevmode` if the current mode is vertical. (Thus, `\vpenalty` cannot be used in math mode.)

7.10 Auxiliary files

It is common to write some information out to a file to be used on a subsequent run. But when it is time to read the file again, you only want to do so if the file actually exists. `\testfileexistence` is given an argument which is appended to `\jobname`, and sets the conditional `\iffileexists` appropriately. For example:

```
\testfileexistence{toc}%
\iffileexists
  \input \jobname.toc
\fi
```

`\testfileexistence` takes an optional parameter; when given, it will override `\jobname` for the root part of the file name. For example, if you want to test for the file ‘`answers.aux`’, you can do this with the following:

```

\testfileexistence[answers]{aux}%
\iffileexists
  \input answers.aux
\fi

```

7.11 User-defined environments

Plain T_EX does not provide “named” block structures, only the anonymous `\begingroup` and `\endgroup` pair. The disadvantage of this is that when there are several such groups and one is mismatched, it can be difficult to find the error. Eplain provides a named block structure so that if you forget an `\environment` or an `\endenvironment`, you will (probably) get an error message about it.

For example:

```

\def\itpar{
  \environment{@italicpar}
  \it\par
}
\def\enditpar{
  \par
  \endenvironment{@italicpar}%
}

```

which could then be used to set italicized paragraphs:

```

\itpar
If I reprehend anything in this world, it is the use of my oracular
tongue, and a nice derangement of epitaphs!
\enditpar

```

The above sort of environment allows nesting. But environments shouldn’t always be allowed to nest. Put the control sequence `\checkenv` at the beginning of a macro that is going to define an environment that should not be nested.

7.12 Page list and page range parsers

The macros which Eplain uses to parse the page lists and ranges in the index, `\idxparselist` and `\idxparserange` (see [Section 5.3.8.2 \[Page destinations for index terms\]](#), page 44), are sometimes useful when defining page number encapsulators. They take one argument, text to parse. When a page list (range) is not present, they set `\idxpagei` to be `\empty`; when a list (range) is detected, they set `\idxpagei` and `\idxpageii` to the first and the second page numbers, respectively.

Eplain’s defaults for the page list and page range delimiters are the same as those in MakeIndex, a comma followed by a space (`‘, ’`) and two dashes (`‘--’`), respectively. If you customize MakeIndex to use different delimiters, you must not forget to let Eplain know about them with the commands

```

\setidxpagelistdelimiter{list-delim}
\setidxpagerangedelimiter{page-delim}

```

These commands save the *list-delim* and *page-delim* delimiters in `\idxpagelistdelimiter` and `\idxpagerangedelimiter`, respectively.

For example, you may want to define a page number markup command which italicizes and properly underlines page ranges by underlining only the page numbers and not the delimiter:

```
\def\ituline#1{%
  {\it
   \idxparserange{#1}%
   \ifx\idxpagei\empty
     % The argument is a single page number.
     \underbar{#1}%
   \else
     % The argument is a page range.
     \underbar{\idxpagei}\idxpagerangedelimiter\underbar{\idxpageii}%
   \fi}%
}
```

Note that the `\ituline` macro is not aware of page lists. This is not needed if you use hyperlinks in the index, because `\hlidx` and `\hlidxpage` will break up the page lists before calling the user's page encapsulator (see [Section 5.3.8.2 \[Page destinations for index terms\]](#), [page 44](#)), so `\ituline` will never see the lists. If, however, you need to design a macro which also takes care of the lists, you can extend `\ituline` with an additional call to `\idxparselist`.

8 Demo files

This chapter contains listings of source files, along with the output they produce (where appropriate), which illustrate various aspects of Eplain. The files can be found in the `demo` subdirectory of Eplain distribution. These demos, both the sources and the compiled PDF and PS files, are also available from <http://tug.org/eplain/demo>.

8.1 Hyperlinks (`xhyper.tex`)

FIGURE 1. Lion in the archives



Show me [the lion in fig. 1](#).
 Show me [the CTAN lion](#).
 Take me to <http://tug.org/eplain>.
 Take me to [Eplain homepage](#).

```
% (This file is public domain.)
%
% This file demonstrates the following features of Eplain:
%
%   - explicit and implicit hyperlinks;
%   - symbolic cross-references;
%   - inserting external graphics using |\includegraphics| from
%     the \LaTeX\ package |graphicx.sty|.
%   - rotating text using |\rotatebox| from |graphicx.sty|.
%
% The compiled demo can be downloaded from
%
%   http://tug.org/eplain/demo
%
% In order to compile this file yourself, you will need the CTAN lion
% drawing by Duane Bibby from
%
%   ftp://tug.ctan.org/ftpmain/CTAN\_lion/ctan\_lion\_350x350.png
```

```

%
% (thanks, |www.ctan.org|). Place the image file in the same
% directory with this file, and change to that directory. Now, to
% produce a PDF, run twice the command
%
%   pdftex xhyper.tex
%
% During the first run, Eplain will write the information about the
% cross-references into |xhyper.aux|, and during the second run this
% information will be read by Eplain to typeset the references.
%
% Demo case:
%
%   Suppose you are using pdf\TeX, have a figure you want to insert
%   scaled to $200\,pt$ horizontally, and you want this figure to
%   completely fill the PDF viewer's window whenever the reader
%   selects a link pointing to this figure. Additionally, you want to
%   typeset some text as live hyperlinks, clicking on which will start
%   a Web browser and open a URL.

\input eplain

% Load \LaTeX\ packages.
\beginpackages
% |url.sty| provides the |\url| command which we will use to typeset
% a URL. We request that |url.sty| be the version from June~27,
% 2005, or later, because earlier versions had problems interacting
% with plain \TeX.
\usepackage{url}[2005/06/27]
% |color.sty| provides support for colored text; all hyperlinks are
% automatically colored by Eplain when this package is loaded. We give
% the |dvipsnames| option because we want to use named colors from the
% |dvips| graphics driver.
\usepackage[dvipsnames]{color}
% Finally, we load |graphicx.sty|, for the macros |\includegraphics|
% and |\rotatebox|.
\usepackage{graphicx}
\endpackages

% Remember that hyperlinks are off by default. Therefore, we need to
% enable them.
\enablehyperlinks

% Customize some hyperlink options. First, we set border width to~$0$
% for all links to get rid of the default boxes around links (we
% prefer colored links over the boxed links). Next, we say that all
% links created by the |url| hyperlink group (which means the |\url|

```

```

% command from |url.sty| must be colored using the named color
% |BlueViolet|.
\hlopts{bwidth=0}
\hlopts[url]{colormodel=named,color=BlueViolet}

% Inhibit page numbering (we have only one page).
\nopagenumbers

% Define a class word for the cross-reference class |figure|. This
% word, when defined, will be automatically prepended by Eplain to the
% reference created by |\ref| (read on to see its use).
\def\figureword{fig.}

% Allocate a count register for the figure's number, and a box
% register which we'll use to measure dimensions of the image.
\newcount\fignumber
\newbox\imgbox

% Now comes the fun part--constructing the figure for the image of the
% \CTAN\ lion. We define a macro
%
% \fig{LABEL}{FILENAME}{CAPTION}{WIDTH}
%
% which creates a figure using LABEL for the cross-reference and
% hyperlink label, reading the image from file FILENAME, using CAPTION
% to name the figure, and WIDTH to scale the image horizontally.
\def\fig#1#2#3#4{%
  % Leave some space above the figure. This will also ensure that we
  % are in the vertical mode before we produce a |\vbox|.
  \medskip
  % Advance the figure number. |\global| ensures that the change to
  % the count register is global, even when |\fig| is buried inside a
  % group.
  \global\advance\fignumber by 1
  % We use |\includegraphics| (from |graphicx.sty|) to load the image,
  % scaled to the specified width, into our 'measuring' box
  % |\imgbox|.
  \setbox\imgbox = \hbox{\includegraphics[width=#4]{#2}}%
  % To make the demo even more exciting, let's put the figure's
  % caption to the left of the image into the |\indent| space of the
  % new paragraph, and rotate the caption~$90^\circ$.
  \textindent{%
    \rotatebox{90}{F{\sc IGURE}~\the\fignumber. #3}%
  }%
  % Continue the paragraph by constructing a |\vbox| with the image of
  % the lion. We use |\definexref| to define the cross-reference
  % label.

```

```

\ vbox{%
  % In addition to the cross-reference label, |\definexref| will
  % create a hyperlink destination with the same label. Therefore,
  % we customize this destination to do what we need. We say that
  % destination type for the hyperlink group |definexref| (to which
  % |\definexref| belongs) should be |fitr|. This destination type
  % will magnify the rectangle specified by the options |width|,
  % |height| and |depth| to the PDF viewer's window. Therefore, we
  % set those options accordingly with |\hldestopts| (notice the use
  % of |depth| instead of |height|---we will want the rectangle to
  % extend {\it downward}, to cover the image which will come
  % next). Notice that these settings will be isolated within the
  % current group (i.e., the |\vbox| we're constructing).
  \hldesttype[definexref]{fitr}%
  \hldestopts[definexref]{width=\wd\imgbox,height=0pt,depth=\ht\imgbox}%
  % We define a symbolic label so that we can later refer
  % to the figure with |\ref|. The command |\definexref| does
  % exactly that. The last argument to |\definexref| specifies
  % class of the label, which determines the word used by |\ref| in
  % front of the reference text (remember that we've defined
  % |\figureword| above).
  \definexref{#1}{\the\fignumber}{figure}%
  % Finally, produce the image which we've been stashing in the box
  % register |\imgbox|.
  \box\imgbox
}%
\medskip
}

% Create the figure.
\fig{CTANlion}{ctan_lion_350x350}{Lion in the archives}{200pt}

% Finished with the fun part, we can relax and typeset some
% hyperlinks. The easiest way to do that is to use the |\ref|
% cross-reference command. We can even pass an optional argument
% (|the lion in|), which will be placed before the class word (|fig.|)
% and become part of the link (to make sure the reader does not have
% to aim too hard).
Show me \ref[the lion in]{CTANlion}.

% If you are the restless kind, here's another way to create a
% hyperlink to the image: we create a link explicitly by using
% |\hlstart ... \hlend|. We don't specify the link type, therefore
% the default type |name| will be used (these are 'named links',
% i.e., links pointing to destinations identified by labels). In the
% options argument, we specify that the border of the link should be
% inverted when the user clicks the link (|hlight=0|), and also set

```

```

% special color for this link, overriding the default dark-red.  The
% label for the destination is the same as the cross-reference label,
% |CTANlion|.
Show me
\hlstart{}{hlight=0,colormodel=named,color=OliveGreen}{CTANlion}
  the CTAN lion\hlend.

% Let's now point somewhere outside our document.  Eplain homepage is
% a good target.  In the similar spirit, let's consider two
% approaches.  The easy one is to use the |\url| command from
% |url.sty|.  Remember that we have customized the color of |url|
% hyperlinks, so this one will show up with a different color than the
% default dark-red.
Take me to \url{http://tug.org/eplain}.

% The second approach is to create an explicit URL link.  We specify
% yet another border highlighting mode, |P|, which means that the
% region underneath the bounding box of the link will be drawn inset
% into the page.  Also, let's set the color of the hyperlink to an RGB
% color |0.4,0.1,0.4|.  Since we cannot use commas to separate the
% color elements inside the options parameter to |\hlstart| (commas
% there separate options), we have to first create a user-defined
% color with |\definecolor| from |color.sty|, and use that in
% |\hlstart|.
\definecolor{mycolor}{rgb}{0.4,0.1,0.4}

Take me to
\hlstart{url}{hlight=P,colormodel=,color=mycolor}{http://tug.org/eplain}
  Eplain homepage\hlend.

\bye

```


8.2 Highlighting T_EX comments in listings (lscommnt.tex)

```

[1] % (This file is public domain.)
[2] % Demonstrate how Eplain can be used to include a TeX source file
[3] % verbatim, typesetting comments in colored italic typewriter type.
[4]
[5] % Load Eplain and LaTeX's color.sty package.
[6] \input eplain
[7] \beginpackages \usepackage{color} \endpackages
[8] \nopagenumbers % Disable page numbers.
[9] \font\commentfont = cmitt10 % Font for the comments (italic \tt).
[10] % We'll define some 'protected' macros with '@' in their names.
[11] \makeatletter
[12] % Define an equivalent of Eplain's \letreturn, to be able to assign
[13] % various actions to the (active) percent character.
[14] \begingroup \makeactive\%
[15]   \gdef\letpercent{\let\%}
[16] \endgroup
[17] % The listing hook to be called in \setuplistinghook, see below. It
[18] % makes '%' active and assigns it a 'start comment' action.
[19] \def\hlightcommentslisting{\makeactive\% \letpercent\start@comment}%
[20] % This is what '%' is aliased to before a comment is started.
[21] \def\start@comment{%
[22]   \leavevmode % Needed in the very first line of the input to process
[23]               % the new par (possibly inserting line number) before we
[24]               % kick in with the color and stuff.
[25]   \begingroup % Isolate color and font changes and the redefinitions.
[26]     \commentfont
[27]     \color{cmyk}{0.28,1,1,0.35}%
[28]     \percentchar          % Produce the actual '%' and
[29]     \letpercent\percentchar % make all following '%'s do the same.
[30]     \letreturn\end@comment % Call \end@comment at end-of-line.
[31]   }
[32] % \end@comment (alias for ^M inside a comment) will end the comment
[33] % started by \start@comment. We make ^M active temporarily so that
[34] % the active version of ^M gets "frozen" into \end@comment.
[35] \begingroup \makeactive\^M % Avoid ^M's from here on.
[36]   \gdef\end@comment{\endgroup \^M}%
[37] \endgroup
[38] \resetatcatcode % Make '@' again inaccessible for use in macro names.
[39]
[40] % Define \setuplistinghook to setup comments highlighting, line
[41] % numbering and omitting the last (empty) line of input.
[42] \def\setuplistinghook{\hlightcommentslisting \linenumberedlisting
[43]   \nolastlinelisting}
[44] % Isn't this fun? This file typesets itself, with the extra bonus of
[45] % the pretty-printed comments and numbered source lines!
[46] \listing{lscommnt}
[47] \bye

```

```

% (This file is public domain.)
% Demonstrate how Eplain can be used to include a TeX source file
% verbatim, typesetting comments in colored italic typewriter type.

% Load Eplain and LaTeX's color.sty package.
\input eplain
\beginpackages \usepackage{color} \endpackages
\nopagenumbers % Disable page numbers.
\font\commentfont = cmitt10 % Font for the comments (italic \tt).
% We'll define some 'protected' macros with '@' in their names.
\makeatletter
% Define an equivalent of Eplain's \letreturn, to be able to assign
% various actions to the (active) percent character.
\begingroup \makeactive\%
  \gdef\letpercent{\let}%
\endgroup
% The listing hook to be called in \setuplistinghook, see below. It
% makes '%' active and assigns it a 'start comment' action.
\def\hlightcommentslisting{\makeactive\% \letpercent\start@comment}%
% This is what '%' is aliased to before a comment is started.
\def\start@comment{%
  \leavevmode % Needed in the very first line of the input to process
               % the new par (possibly inserting line number) before we
               % kick in with the color and stuff.
  \begingroup % Isolate color and font changes and the redefinitions.
    \commentfont
    \color[cmyk]{0.28,1,1,0.35}%
    \percentchar % Produce the actual '%' and
    \letpercent\percentchar % make all following '%'s do the same.
    \letreturn\end@comment % Call \end@comment at end-of-line.
  }
% \end@comment (alias for ^^M inside a comment) will end the comment
% started by \start@comment. We make ^^M active temporarily so that
% the active version of ^^M gets "frozen" into \end@comment.
\begingroup \makeactive\^^M % Avoid ^^M's from here on.
  \gdef\end@comment{\endgroup ^^M}%
\endgroup
\resetatcatcode % Make '@' again inaccessible for use in macro names.

% Define \setuplistinghook to setup comments highlighting, line
% numbering and omitting the last (empty) line of input.
\def\setuplistinghook{\hlightcommentslisting \linenumberedlisting
                      \nolastlinelisting}
% Isn't this fun? This file typesets itself, with the extra bonus of
% the pretty-printed comments and numbered source lines!
\listing{lscommnt}
\bye

```

Macro index

@

@hllabel	47, 48, 50, 52
@indexproof insertion class	24

A

abovecolumnskip	29
abovecolumnspenalty	27
abovelistskip	11
abovelistskipamount	10
adjarrow	61
adjmapdown	61
adjmapleft	60
adjmapright	60
adjmapup	61
advancebottommargin	28
advanceleftmargin	28
advancetopmargin	28
afterindexterm	25
afterindexterm hook	21
AMSLaTeX	31
AMSTeX	31
arrow	60, 61

B

bblem	8
bblfilebasename	6
bblhook	8
bblnewblock	8
bblrm	8
bblsc	8
bcolor (hyperlink option)	53
bdash (hyperlink option)	53
begin for index entries	21
begin{picture}	34
begin{theindex}	24
beginindex hook	24
beginlist	11
beginpackages	33
belowcolumnskip	29
belowfootnoterulespace	30
belowlistskip	11
belowlistskipamount	10
biarrow	61
biblabelcontents	8
biblabelextraspace	8
biblabelprint	8
biblabelwidth	8
bibliography	6
bibliography (hyperlinks)	41
bibliographystyle	6

BibTeX	31
bihline	60
bimapdown	60
bimapleft	60
bimapright	60
bimapup	61
bisline	61
bivline	61
blackbox	31
blanklineskipamount in justified text	27
blanklineskipamount in obeyed text	73
bottom (destination option)	50, 51
bottommargin	28
boxit	32
boxitspace	32
bstyle (hyperlink option)	53
bwidth (hyperlink option)	53

C

catcode	66
center	26
centereddisplays	9
channelwidth	61, 65
cite	6
cite (hyperlinks)	41
cmd (destination option)	47, 48, 50, 51
cmd (hyperlink option)	48, 49, 52, 53
color (hyperlink option)	46
colormodel (hyperlink option)	46
columnfill	29
commdiag	61
commdiagbaselines	62, 65
csn	70

D

definecolor	76
definecontentsfile	14
defineindex	19
definexref	14, 76
definexref (hyperlinks)	41
depth (destination option)	50, 51
depth (hyperlink option)	54
discretionaries	31
displaylines	9
doublecolumns	29
drawline	59
drawvector	59
dvipdfm (hyperlink driver)	49

E

eattoken	68
----------------	----

ece.....	70
edefappend.....	70
ehrule.....	5
enablehyperlinks.....	37, 44, 55
end for index entries.....	21
end{picture}.....	34
end{theindex}.....	24
endlist.....	11
endnumberedlist.....	10
endorderedlist.....	10
endpackages.....	33
endunorderedlist.....	10
eplain.....	3
eplaininput.....	33
eqalignno.....	9
eqconstruct.....	17
eqdef.....	16
eqdef (hyperlinks).....	42
eqdefn.....	16
eqdefn (hyperlinks).....	42
eqnumber.....	16
eqprint.....	17
eqref.....	16, 42
eqrefn.....	16, 42
eqsubdef.....	18
eqsubdef (hyperlinks).....	42
eqsubdefn.....	18
eqsubdefn (hyperlinks).....	42
eqsubreftext.....	18
everyfootnote.....	30
evrule.....	5
expandonce.....	71
ext (hyperlink option).....	48, 49

F

file (hyperlink option).....	48, 49, 52, 53
fileexists (conditional).....	73
filename (hyperlink type).....	48, 52
filepage (hyperlink type).....	52
fit (destination type).....	49
fitb (destination type).....	49
fitbh (destination type).....	50
fitbv (destination type).....	50
fith (destination type).....	49
fitr (destination type).....	50
fitv (destination type).....	49
flushleft.....	26
flushright.....	26
fmtversion.....	1
footnote (hyperlinks).....	45
footnotemarkseparation.....	30
footnoteruleheight.....	30
footnoterulewidth.....	30
for.....	67
For.....	67
frac.....	30
fullmonthname.....	9

futurenonpacelet.....	72
-----------------------	----

G

generaldisplay.....	9
getproperty.....	71
gloggingall.....	5
gobble.....	68
gobbletwo.....	68
gridcommdiag.....	63
gtracingall.....	5
gutter.....	29
gutterbox.....	29

H

hangindent for index entries.....	24
harrowlength.....	60, 64
hchannel.....	65
height (destination option).....	50, 51
height (hyperlink option).....	54
hgrid.....	63, 65
hldest.....	38, 47, 50, 55
hldestoff.....	54, 57
hldeston.....	57
hldestopts.....	55, 56, 76
hldesttype.....	55, 56, 76
hlend.....	39, 76
hlfootbacklabel.....	45
hlfootlabel.....	45
hlfootlabelnumber.....	45
hlhash.....	48
hlidx.....	43
hlidxlabel.....	43
hlidxlabelnumber.....	43
hlidxpage.....	44
hlidxpagelabel.....	44
hlight (hyperlink option).....	53
hlightcommentslisting.....	82
hline.....	60
hloff.....	54, 57
hlon.....	57
hlopts.....	55, 56, 76
hlstart.....	39, 48, 52, 55, 76
hltype.....	55, 56
hmorphposn.....	60, 65
hmorphposndn.....	60, 65
hmorphposnlft.....	60, 65
hmorphposnrt.....	60, 65
hmorphposnup.....	60, 65
hoffset.....	23
hookaction.....	70
hookactiononce.....	70
hookappend.....	70
hookprepend.....	70
hookrun.....	71
href.....	40
hruledefaultdepth.....	5

hruledefaultheight	5
hsize	28
hypertex (hyperlink driver)	46
hyphenpenalty for index entries	24

I

identity	69
idx	20
idx (hyperlinks)	42
idxargclose	23
idxargopen	23
idxbeginrangemark	25
idxencapoperator	25
idxendrangemark	25
idxexact	44
idxmarked	20
idxmarked (hyperlinks)	42
idxname	20
idxname (hyperlinks)	42
idxnameseparator	20
idxnone	44
idxpage	44
idxpagei	74
idxpageii	74
idxpagelistdelimiter	74
idxpagenum	25
idxpagerangedelimiter	74, 75
idxparselist	74
idxparserange	74
idxrangebeginword	25
idxrangeendword	25
idxseealso cmdword	25
idxseecmdword	25
idxsubentryseparator	25
idxsubmarked	20
idxsubmarked (hyperlinks)	42
ifempty	72
iffileexists	73
ifidx	19
ifindexproofing	23
ifinteger	72
ifpdf	32, 37
ifrewritetocfile	13
ifundefined	72
includegraphics	76
indexfilebasename	24
indexfonts	24
indexitem hook	24
indexprooffont	23
indexproofingfalse	23
indexproofingtrue	23
indexproofterm	23
indexproofunbox	24
indexsee	25, 45
indexseealso	25, 45
indexseealsowords	25
indexseeword	25

indexsetmargins	23
indexspace	24
innerdef	67
innerinnerdef	67
innernewbox	67
innernewcount	67
innernewdimen	67
innernewfam	67
innernewhelp	67
innernewif	67
innernewinsert	67
innernewlanguage	67
innernewread	67
innernewskip	67
innernewtoks	67
innernewwrite	67
input	33
insidemargin	23
interfootnoteskip	30
interitemskip	11
interitemskipamount	10
isinteger	72
item in indexes	24
itemletter	11
itemnumber	11
ituline	74

J

jobname	6, 24, 73
---------------	-----------

L

LAMSTeX	31
LaTeX	31
lbracechar	66
left (destination option)	49, 50, 51
leftdisplayindent	9
leftdisplays	9
leftdisplaysetup	9
leftmargin	28
leqalignno	9
letreturn	66
letter	66
lft	60
li	10
li (hyperlinks)	41
linenumberedlisting	11, 82
listcompact	10
listing	11, 82
listingfont	11
listleftindent	10
listmarkerspace	11
listrightindent	10
loggingall	5
loop	68

M

makeactive	66
makeatletter	66
makeatother	66
makeblankbox	31
makecolumns	27
makeheadline	24
mapdown	59, 60
mapleft	59, 60
mapright	59, 60
mapup	59, 60
matrix	61
MF	31
monthname	9
morphdist	60, 65

N

name (hyperlink type)	48, 52
new	67
newwin (hyperlink option)	52, 54
noarrow	4
noauxfile	4
nobibtex	4
nocite	6
nolastlinelisting	11, 82
nolinks (hyperlink driver)	54
normalbaselineskip	46
num (hyperlink type)	53
numberedfootnote	29
numberedfootnote (hyperlinks)	45
numberedlist	10
numberedlistdepth	11
numberedmarker	11
numbername	73

O

obeywhitespace	73
orderedlist	10
other	66
outer	67
outsidemargin	23

P

page (hyperlink type)	52
pagefit (hyperlink option)	52, 54
pageno	23
pagetotal	29
paperheight	29
paperwidth	29
parindent in indexes	24
path	31
pdfoutput	32
pdftex (hyperlink driver)	49
percentchar	66
phantomeqlabel	42

phantomeqnumber	42
previouseverydisplay	9
printbetweencitations	7
printcitefinish	7
printcitenote	7
printcitestart	7
printitem	11
printlistinglineno	11

Q

quadcolumns	29
-------------	----

R

raggedright for index entries	24
raise (hyperlink option)	46, 57
raw (destination type)	47, 50
raw (hyperlink type)	48, 52
rbracechar	66
readindexfile	24
readindexfile (hyperlinks)	42
readtocfile	13
ref	15, 76
ref (hyperlinks)	42
refn	15
refn (hyperlinks)	42
refs	15
refs (hyperlinks)	42
refspace	42
reftie	42
repeat	68
resetatcatcode	66
rewritetocfile (conditional)	13
right (destination option)	50, 51
rightmargin	28
rotatebox	76
rt	59

S

sanitize	69
sarrowlength	60, 64
see for index entries	21, 25
seealso for index entries	21
seevariant	25
setidxpagelistdelimiter	74
setidxpagerangeddelimiter	74
setproperty	71
setuplistinghook	11, 82
sidx	20
sidxmarked	20
sidxname	20
sidxsubmarked	20
singlecolumn	29
sline	60, 61
SLiTeX	31
special	37

<code>specialpathdelimiters</code> (conditional).....	31
<code>subeqnumber</code>	18
<code>subitem</code> in indexes	24
<code>subsubitem</code> in indexes	24

T

<code>testfileexistence</code>	73
<code>TeX</code>	31
<code>timestamp</code>	9
<code>timestring</code>	9
<code>toc</code> ...entry.....	12, 13
<code>tocfilebasename</code>	14
<code>today</code>	9
<code>top</code> (destination option)	49, 50, 51
<code>topmargin</code>	28
<code>tracingall</code>	5
<code>tracingboxes</code>	5
<code>tracingoff</code>	5
<code>triplecolumns</code>	29
<code>tt</code>	35
<code>ttfamily</code>	35

U

<code>uncatcodespecials</code>	66
<code>unorderedlist</code>	10
<code>unorderedlistdepth</code>	11
<code>unorderedmarker</code>	11
<code>url</code>	76
<code>url</code> (hyperlink type)	48, 52
<code>url</code> (hyperlinks).....	40
<code>usepackage</code>	33

V

<code>varrowlength</code>	60, 64
<code>vchannel</code>	65

<code>verbatim</code>	11
<code>verbatimescapechar</code>	12
<code>vgrid</code>	63, 65
<code>vline</code>	60
<code>vmorphposn</code>	60, 65
<code>vmorphposndn</code>	60, 65
<code>vmorphposnleft</code>	60, 65
<code>vmorphposnrt</code>	60, 65
<code>vmorphposnup</code>	60, 65
<code>vpenalty</code>	73
<code>vruledefaultwidth</code>	5

W

<code>width</code> (destination option)	50, 51
<code>width</code> (hyperlink option).....	54
<code>writenumberedtocentry</code>	12
<code>writenumberedtocline</code>	13
<code>writetocentry</code>	12

X

<code>xrdef</code>	15
<code>xrdef</code> (hyperlinks).....	42
<code>xref</code>	15
<code>xref</code> (hyperlinks).....	42
<code>xrefn</code>	15
<code>xrefn</code> (hyperlinks).....	42
<code>xrefpageword</code>	15, 42
<code>xrefwarning</code> conditional.....	15
<code>xrefwarningfalse</code>	6
<code>xrlabel</code>	69
<code>xyz</code> (destination type).....	47, 49

Z

<code>zoom</code> (destination option)	49, 51
--	--------

Concept index

-
- .aux file 6, 14
- .bbl file 6
- .bib file 6
- .bst files 6
- .cls files 32
- .eps files 35
- .fmt file 2, 3
- .idx files 19, 43
- .ind files 19, 43
- .pdf files 32, 35, 37
- .ps files 37
- .sty files 32
- .toc file 12

- A**
- active characters 66
- after index terms 25
- alignments 27
- all groups, specifying 56
- allocation macros 67
- alphanumeric references 7
- AMSIAT_EX 31
- amsptt.sty 4
- AMST_EX 31
- AMST_EX conflicts 4
- arguments, ignoring 68
- arrows 59
- atom 71
- autopict.sty 34
- avoiding boxed links 40, 56
- auxiliary files, existence of 73

- B**
- backslash character 66
- balancing of columns with \singlecolumn 29
- Berry, Karl 1
- beveled hyperlink border 53
- bibliographies 5
- bibliography fonts 8
- bibliography items, extra space between 8
- bibliography, formatting the 8
- bibliography, hyperlinks 41
- bibtex 4
- BibT_EX 5, 31
- black boxes 31
- Borceux, Francis 63
- border color, hyperlink 53
- border style, hyperlink 53
- border width, hyperlink 53
- Bott, Raoul 61
- boxed links, avoiding 40, 56
- boxes, open 31
- braces, inside index entries 23
- brackets, inside index entries 23
- Brockett, Roger W. 62
- Butterfly Lemma 64

- C**
- Carlisle, David 32
- category codes 66
- centering 26
- characters, converting to 69
- citations 5
- citations, formatting 7
- citations, hyperlinks 41
- citations, undefined 6
- cmtt8 23
- color 34
- color, demo 76
- color, hyperlink border 53
- color, hyperlinks 40, 46, 56
- color, problems with pdfT_EX 34
- color.sty 34, 40, 55, 56, 76
- colored links 40, 46, 56
- column balancing with \singlecolumn 29
- column eject 29
- commas after index terms 25
- commas in cross-referencing index entries 25
- comments, highlighting in listings 82
- commutative diagrams 59
- contents 12
- contents, and verbatim text 13
- contents, hyperlinks 45
- ConT_EXt 34
- continued index entries 24
- covering homotopy property 61
- cross-references 14
- cross-references, defining general 14, 15
- cross-references, demo 76
- cross-references, hyperlinks 41
- cross-referencing index entries 21, 25
- CTRL-L, and verbatim listing 11
- cube 63
- customizing indexing 25

- D**
- dashed hyperlink border 53
- date 9
- default hyperlink options 55, 56
- default hyperlink type 55, 56
- defining general references 14, 15
- definitions, global 66
- demo files 76

destgroup	39
destgroup ‘bib’	41
destgroup ‘definexref’	41
destgroup ‘eq’	42
destgroup ‘foot’	45
destgroup ‘footback’	45
destgroup ‘idx’	42
destgroup ‘li’	41
destgroup ‘xrdef’	42
destgroup options	55, 56
destgroup options, demo	76
destgroup type	55, 56
destgroup type, demo	76
destination group	39
destination options	38
destination options, common	46
destination options, dvipdfm	50
destination options, hypertex	48
destination options, pdftex	50
destination type	38
destination types, dvipdfm	49
destination types, hypertex	47
destination types, pdftex	49
destinations, default options	55, 56
destinations, default type	55, 56
destinations, dimensions	51
destinations, disabling	54, 57
destinations, group options	55, 56
destinations, group options, demo	76
destinations, group type	55, 56
destinations, group type, demo	76
destinations, in another file	48, 52
destinations, large operators	46, 57
destinations, magnification	51
destinations, named	48, 52
destinations, numbered	53
destinations, page	52
destinations, raising	46
destinations, URL	48, 52
detecting numbers	72
diagnostics	5
Diagram, macros for LaTeX	63
dimensions, hyperlink	54
dimensions, hyperlink destination	51
disabling hyperlinks	54, 57
disabling indexes	19
displayed math and hyperlinks	46, 57
displays, left-justifying	9
do...while loops	67
double column output	29
double columns in indexes	24
draft , option for ‘ graphics.sty ’	35
driver dvipdfm	49
driver hypertex	46
driver nolinks	54
driver pdftex	49
drivers, hyperlink	37
dvipdfm	37, 47

dvipdfm , destination options	50
dvipdfm , destination types	49
dvipdfm , hyperlink driver	49
dvipdfm , link options	53
dvipdfm , link types	51
dvips	47

E

Eijkhout, Victor	68
eject in multicolumns	29
electronic mail addresses, breaking	30, 35
empty argument, checking for	72
empty equation labels	16
empty equation labels, referring to	16
empty string, checking for	72
Encapsulated PostScript	35
environments, user-defined	74
Eplain, installing	2
Eplain, invoking	3
Eplain, purpose of	1
Eplain, upgrading	2
eplain.aux	2
eplain.fmt	2
EPS	35
epstopdf	35
epstopdf.sty	35
equation labels, characters valid in	16
equation numbers, formatting of	16
equations, giving numbers to all	16
equations, groups of	18
equations, hyperlinks	42
equations, numbering	16
equations, references to	16
error messages	5
error on \input	33
escape character, changing verbatim	12
exact index hyperlinks	43
expansion, one-level	71
explicit hyperlinks	38
explicit hyperlinks, demo	76

F

file, hyperlink to	48, 52
‘ file: ’ links	40
filenames, breaking	30, 35
files, verbatim listing of	11
files, verbatim listing of, demo	82
filtering index entries with hyperlinks	43
footnotes, hyperlinks	45
footnotes, numbered	29
for loops	67
form feed character, and verbatim listing	11
format file	2
formatting index entries	24
fractions	30

G

Ghostsript	47
gobbling arguments	68
golden mean	62
Graham, Ronald L.	7
graphics collection, L ^A T _E X	32, 34, 55
graphics collection, L ^A T _E X, demo	76
graphics, omitting typesetting of	35
graphics, problems with pdfT _E X	34
graphics.sty	34
graphicx.sty	34, 76
grid	63
group “ (empty)	56
group “*”	56
group ‘bib’	41
group ‘cite’	41
group ‘definexref’	41
group ‘eq’	42, 57
group ‘foot’	45
group ‘footback’	45
group ‘hrefext’	40
group ‘hrefint’	40
group ‘idx’	42
group ‘li’	41
group ‘ref’	41
group ‘url’	40
group ‘xrdef’	42
group ‘xref’	42
group option list	57
group options, hyperlink	55, 56
group options, hyperlink, demo	76
group type, hyperlink	55, 56
group type, hyperlink, demo	76
group, destination	39
group, disabling hyperlinks	58
group, link	39
group, preserving option list	57
groups, specifying all	56

H

hanging on \input	33
help messages	5
highlight modes, hyperlink	53
highlighting	35
highlighting, in listings	82
hooks	70
Höppner, Klaus	35
hyperlink border color	53
hyperlink color	40, 46, 56
hyperlink destination, dimensions	51
hyperlink destination, magnification	51
hyperlink destination, named	48, 52
hyperlink destination, numbered	53
hyperlink destination, page	52
hyperlink destination, raising	46
hyperlink dimensions	54
hyperlink driver dvipdfm	49

hyperlink driver hypertex	46
hyperlink driver nolinks	54
hyperlink driver pdftex	49
hyperlink drivers	37
hyperlink group, disabling hyperlinks	58
hyperlink group, preserving option list	57
hyperlink options, common	46
hyperlinks, bibliography	41
hyperlinks, border style	53
hyperlinks, border width	53
hyperlinks, citations	41
hyperlinks, cross-references	41
hyperlinks, default options	55, 56
hyperlinks, default type	55, 56
hyperlinks, demo	76
hyperlinks, disabling	54, 57
hyperlinks, equations	42
hyperlinks, explicit	38
hyperlinks, explicit, demo	76
hyperlinks, filtering index entries	43
hyperlinks, footnotes	45
hyperlinks, group option list	57
hyperlinks, group options	55, 56
hyperlinks, group options, demo	76
hyperlinks, group type	55, 56
hyperlinks, highlight mode	53
hyperlinks, implicit	39
hyperlinks, implicit, demo	76
hyperlinks, index	42
hyperlinks, index destination placement	44
hyperlinks, index, exact	43
hyperlinks, large operators	46, 57
hyperlinks, lists	41
hyperlinks, opening in a new window	54
hyperlinks, page references	42
hyperlinks, preserving page-breaking	54
hyperlinks, preserving spacing	54
hyperlinks, see and see also index entries	45
hyperlinks, table of contents	45
hyperlinks, to another file	48, 52
hyperlinks, URL	40, 48, 52
hyperref.sty	36
hypertex , destination options	48
hypertex , destination types	47
hypertex , hyperlink driver	46
hypertex , link options	49
hypertex , link types	48
hypertext links	37

I

identifying numbers	72
idxuniq	43
ignoring arguments	68
implicit hyperlinks	39
implicit hyperlinks, demo	76
inaccessible macros	66
index entries and ranges	21

index entries containing braces	23
index entries containing brackets	23
index entries with special characters	22
index entries' page numbers, modifying	21
index entries, and cross-referencing	21, 25
index entries, proofing	23
index entries, with verbatim text	22
index entry continuations	24
index entry formatting	24
index entry general sorting	20
index fonts	24
index groupings	24
index hyperlink	42
index typesetting	24
index, and verbatim text	22
index, choosing destination placement	44
index, destination placement	44
index, exact hyperlinks	43
index, hyperlinks in see and see also entries	45
index, parsing page numbers	44
index, placement of destinations	44
index, selecting destination placement	44
index, underlining page numbers	74
indexes, disabling	19
indexes, multiple	19
indexing	19
indexing and trailing spaces	20
indexing commands	20
indexing terms	19
insertion classes	29
inset hyperlink border	53
installation	2
integers, detecting	72
item labels, changing	11
iteration	67

J

justification	26
---------------------	----

K

Knuth, Donald Ervin	7, 66
---------------------------	-------

L

labels on items, changing	11
labels, characters valid in	14
labels, empty equation	16
labels, empty equation, referring to	16
Lamport, Leslie	1
LAMST _E X	31
Lang, Serge	61, 64
large operators and hyperlinks	46, 57
L _A T _E X	1, 5, 31, 59
L _A T _E X graphics collection	32, 34, 55
L _A T _E X graphics collection, demo	76
L _A T _E X packages	32, 34, 36

L _A T _E X packages, restoring \input	33
left-justification	26
left-justification of displays	9
letterspacing	35
linear systems theory	62
lines	59
link group	39
link options	38
link options, common	46
link options, dvipdfm	53
link options, hypertex	49
link options, pdftex	53
link type	38
link types, dvipdfm	51
link types, hypertex	48
link types, pdftex	51
link, group options	55, 56
link, group options, demo	76
link, group type	55, 56
linkgroup	39
linkgroup 'cite'	41
linkgroup 'eq'	42, 57
linkgroup 'foot'	45
linkgroup 'footback'	45
linkgroup 'hrefext'	40
linkgroup 'hrefint'	40
linkgroup 'idx'	42
linkgroup 'ref'	41
linkgroup 'url'	40
linkgroup 'xref'	42
linkgroup options	55, 56
linkgroup options, demo	76
linkgroup type	55, 56
links, hypertext	37
list of figures	14
list of tables	14
listing files	11
listing files, demo	82
lists	9
lists, formatting	10
lists, hyperlinks	41
logos	31
lookahead without spaces	72
loops	67
lscommnt.tex	82

M

magnification, hyperlink destination	51
makeindex	4, 19, 42
margins, changing	28
margins, index terms in	23
mathematics displays, formatting	9
mathematics displays, hyperlinks	46, 57
Metafont	31
miniltx.tex	32
minimal realizations	62
modifying index entries' page numbers	21

morphisms	59
multiple column output	29
multiple indexes	19

N

named destination	48, 52
names, of T _E X variants	31
new window, opening hyperlink in	54
newlinechar	5
newlines, obeying	73
nolinks , hyperlink driver	54
numbered destination	53
numbered lists	9
numbered references	7
numbers, detecting	72
numbers, written form of	73

O

Oberdiek, Heiko	32
omitting hyperlinks	54, 57
omitting typesetting of graphics	35
open boxes	31
option list, group	57
option list, preserving for group	57
options, destination, common	46
options, destination, dvipdfm	50
options, destination, hypertex	48
options, destination, pdftex	50
options, link and destination	38
options, link, common	46
options, link, dvipdfm	53
options, link, hypertex	49
options, link, pdftex	53
ordered list	9
output routine and index proofing	24
overstriking	35

P

packages, L ^A T _E X	32, 34, 36
page destination	52
page list, parsing	44
page range, parsing	44
page reference hyperlink	42
page-breaking, preserving with hyperlinks	54
parsing page numbers	44
Patashnik, Oren	5
pathnames, breaking	30, 35
PDF	35
PDF output	32
pdftex	4, 32, 37
pdftex , destination options	50
pdftex , destination types	49
pdftex , hyperlink driver	49
pdftex , link options	53
pdftex , link types	51

pdfT _E X, problems using color and graphics	34
pdfT _E X, problems with ‘ supp-mis.tex ’	34
pict2e.sty	36
picture mode	34, 59
Portable Document Format	35
PostScript point	50, 51, 53
proofing index terms	23
properties	71
ps2pdf	47
psfrag.sty	35

Q

quadruple column output	29
-------------------------------	----

R

Rahtz, Sebastian	32
raising hyperlink destinations	46, 57
ranges and index entry	21
recognizing numbers	72
rectangles	31
references, alphanumeric	7
references, defining general	14, 15
references, numbered	7
register allocation	67
restoring \input , L ^A T _E X packages	33
return character	66
right-justification	26
rms	1
rotation	34
rotation, demo	76
rule thickness	5
‘ run: ’ links	40

S

scaling	34
scaling, demo	76
sed	26
see also index entries and hyperlinks	45
see also index entries and sorting	25
see, and index entries	21, 25
see, and index entries, hyperlinks	45
silent indexing	19
skipping tokens	72
SLi _T _E X	31
Snake Lemma	61
solid hyperlink border	53
sorting an index	19
sorting of index entries	20
soul.sty	35
space above index entries	24
spaces, ignoring	72
spaces, obeying	73
spaces, trailing and indexing commands	20
spacing out	35
spacing, preserving with hyperlinks	54

special characters, in index entries	22
special characters, in table of contents	13
Stallman, Richard	1
striking out	35
style, hyperlink border	53
subequations, referring to	18
subterm in indexing	19
<code>supp-mis.tex</code> , problems with pdfTeX	34
<code>supp-pdf.tex</code>	34

T

table of contents	12
table of contents, and verbatim text	13
table of contents, hyperlinks	45
table of contents, short	13, 68
tables	27
tabs	73
<i>TeX by Topic</i>	68
TeX Frequently Asked Question	72
TEXFORMATS	2
<code>texi2dvi</code>	4, 7, 19
Texinfo	1
TEXINPUTS	2
time of day	9
<code>toc</code> files, writing several	14
tracing	5
trailing spaces and indexing commands	20
<code>trimsee</code>	26
triple column output	29
Tu, Loring W.	61
<i>TUGboat</i>	1
type, link and destination	38
types, destination, <code>dvipdfm</code>	49
types, destination, <code>hypertex</code>	47
types, destination, <code>pdftex</code>	49
types, link, <code>dvipdfm</code>	51
types, link, <code>hypertex</code>	48
types, link, <code>pdftex</code>	51
typesetting an index	24

U

undefined control sequence, checking for	72
undefined labels, warnings about	2
underline hyperlink border	53

underlining	35
underlining page numbers in index	74
universal mapping property	62
unordered lists	9
upgrading	2
URL for ' <code>ifpdf.sty</code> '	32
URL for <code>MakeIndex</code>	19
URL for ' <code>path.sty</code> '	31
URL for pdfTeX	32
URL for ' <code>texnames.sty</code> '	31
URL hyperlink	40, 48, 52
<code>url.sty</code>	35, 40, 76
user-inaccessible macros	66

V

vectors	59
verbatim listing	11
verbatim listing, demo	82
verbatim text, in index	22
verbatim text, in table of contents	13
version number	1

W

Walden, David	1
Warner, Frank W.	62
whatsits made by hyperlinks	55
whatsits made by index entries	21
while loops	67
whitespace	73
width, hyperlink border	53
writing several <code>toc</code> files	14

X

<code>xcolor.sty</code>	36
<code>xdvi</code>	47
<code>xexplain.tex</code>	1
<code>xhyper.tex</code>	76

Z

Zassenhaus, Hans	64
zooming, hyperlink destination	51